
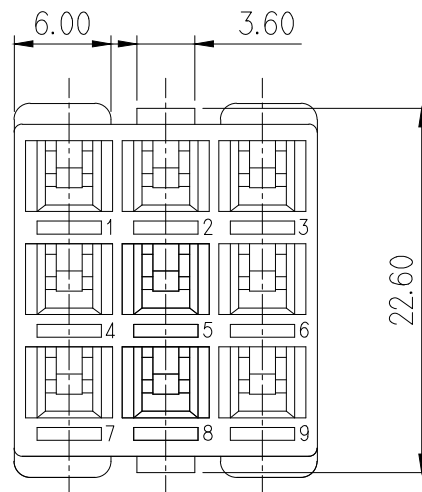
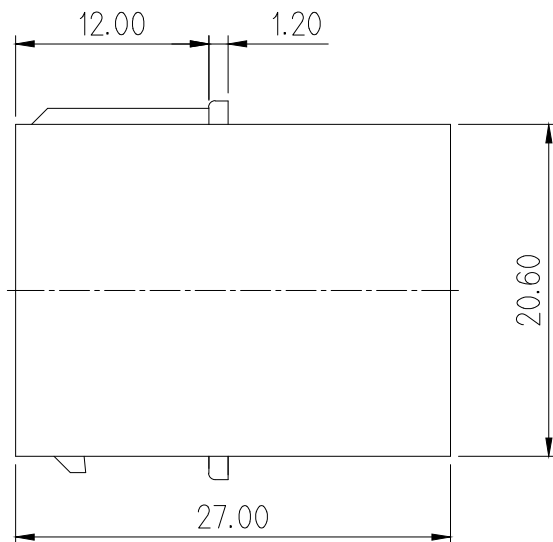


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

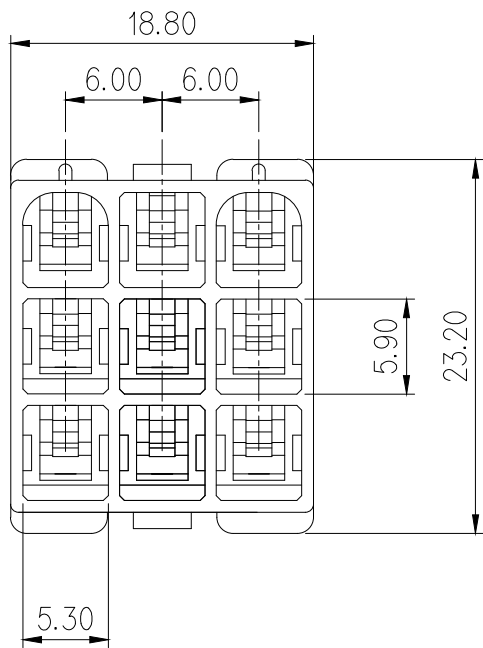

PART NO. *표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

NOTE

- | |
|--|
| 1. MUST BE FREE OF FLASH, BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION. |
| 2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS. |
| 3. APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
APPLICABLE HOUSING : MG610234T-*09 |
| 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION. |

주 기

1. 기능상 유해한 FLASH, BURR, WELDLINE 없을 것
2. 지시하지 않은 모든 R은 0.3R.
3. 적용 TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
- 적용 HOUSING : MG610234T-*09
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
					INSULATION		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE SCALE 2/1 PART NO. MG620431T-09
DR.	LYS '17.11.01		CHK.	PSH '17.11.01			PART NAME
CHK.	KSH '17.11.01		APP.	BUC '17.11.01			
							1806 9M HOUSING