

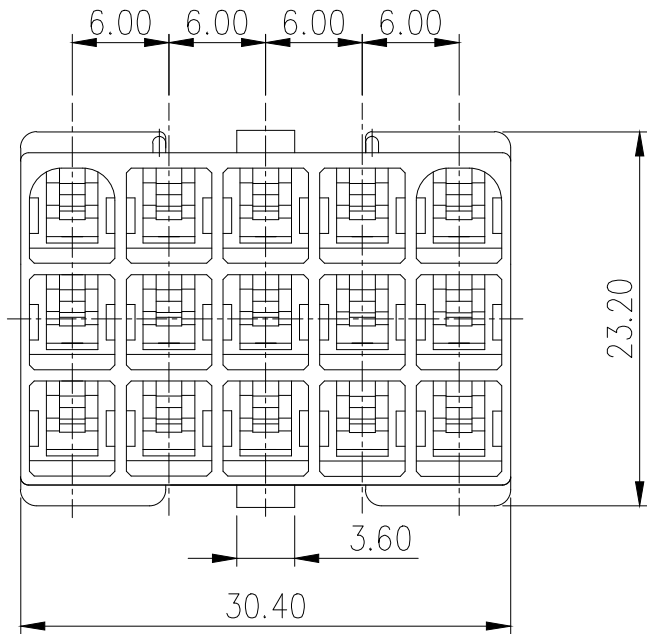
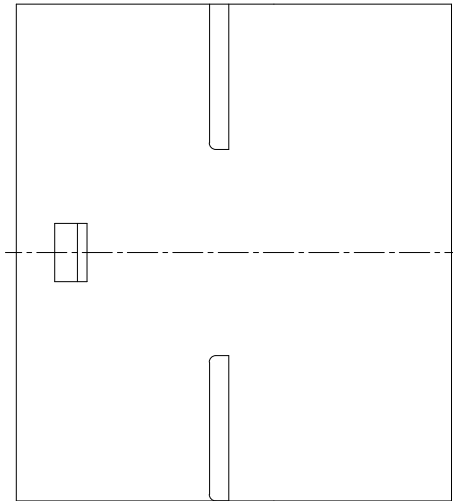


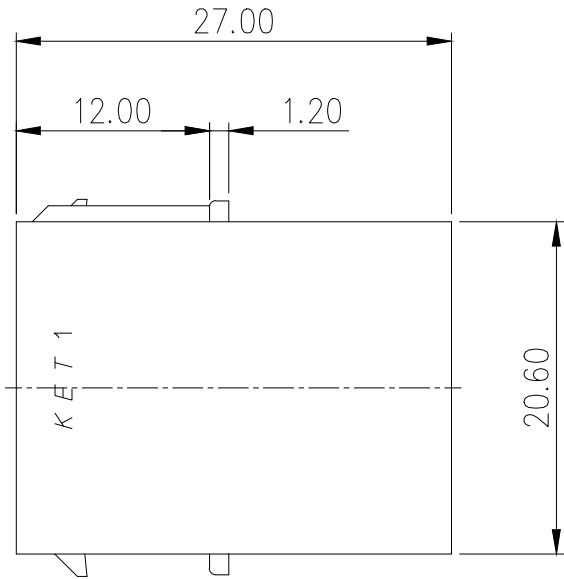


NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

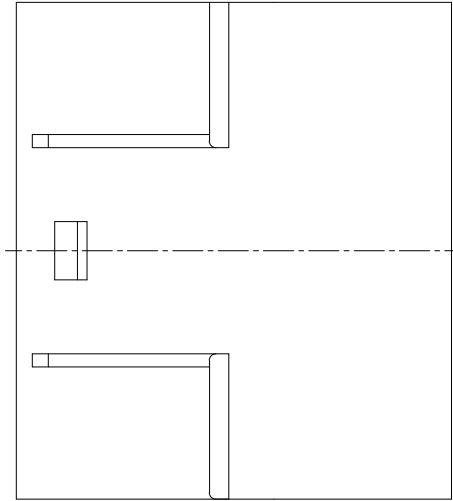

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	ST740466
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
- APPLICABLE HOUSING :MG610238
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

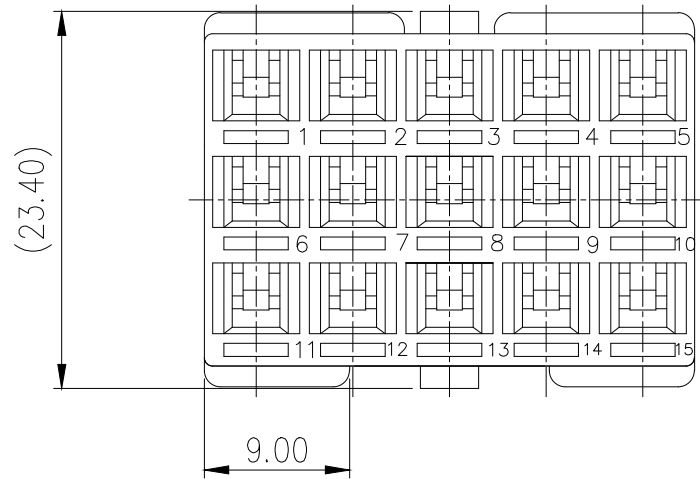

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 적용 HOUSING:MG610238
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE			CLASS
						INSULATION			TYPE
	설계사양변경(S110128)근거 도면 재작성	KSH	—		'11.04.28	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SEE TABLE	2/1	MG620433	
DR.	根 '90.04.08	CHK.	S.H.HAN'90.05.31			PART NAME			
CHK.	S. w k u	APP.	W. J. H. K			1806 REC 15P HS'G			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK