


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	MG610020
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

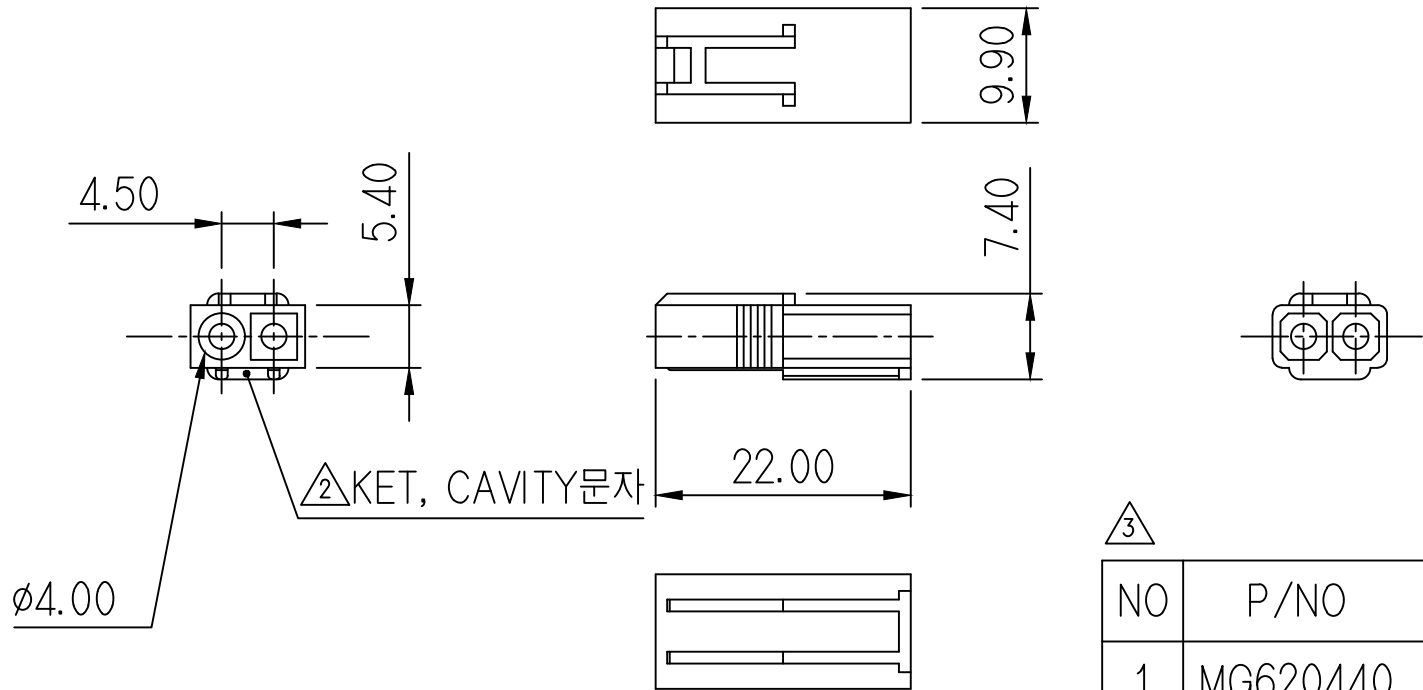

NO	P/NO	MATERIAL
1	MG620440	NYLON [V2]
2	MG620440R	NYLON [V0]


주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST750293-3, 750294-3
- 적용 HOUSING:MG610024, 610024R
- 내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST750293-3, 750294-3
- APPLICABLE HOUSING : MG610024, 610024R
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
④	설계사양변경(S110128)근거 도면 재작성	ysmt	4/11	3/11	FINISH	NATURAL	
③	시방변경S090052근거 변경	CJH			WIRE RANGE		
②	치수추가(4곳)	LSY			INSULATION		
①	명칭 변경(전ø1.3 PIN 2P HSG)	kw			TOLERANCE EXCEPT AS NOTED	SCALE 1/1	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE		PART NO. ③ MG620440R MG620440
DR.	Sile 95.03.11	CHK.			PART NAME		
CHK.	S. w kw	APP.	Wafu				

① ø1.3 REC HOUSING 2P