

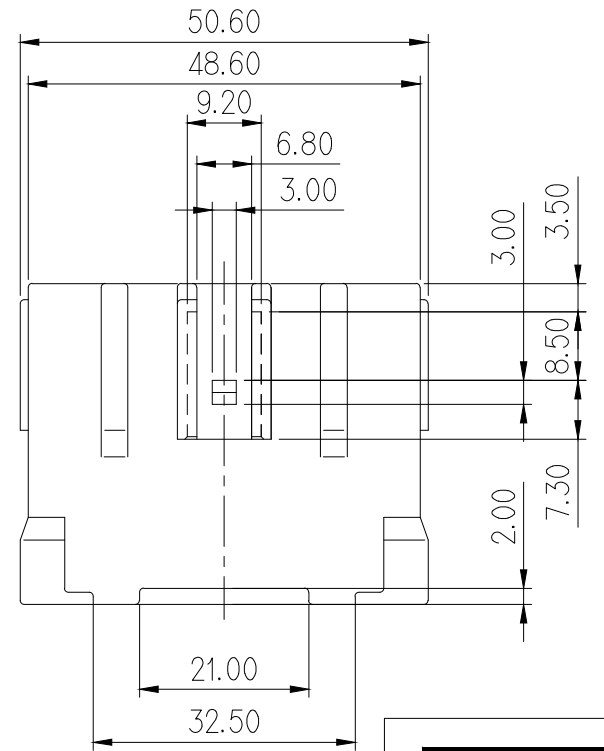
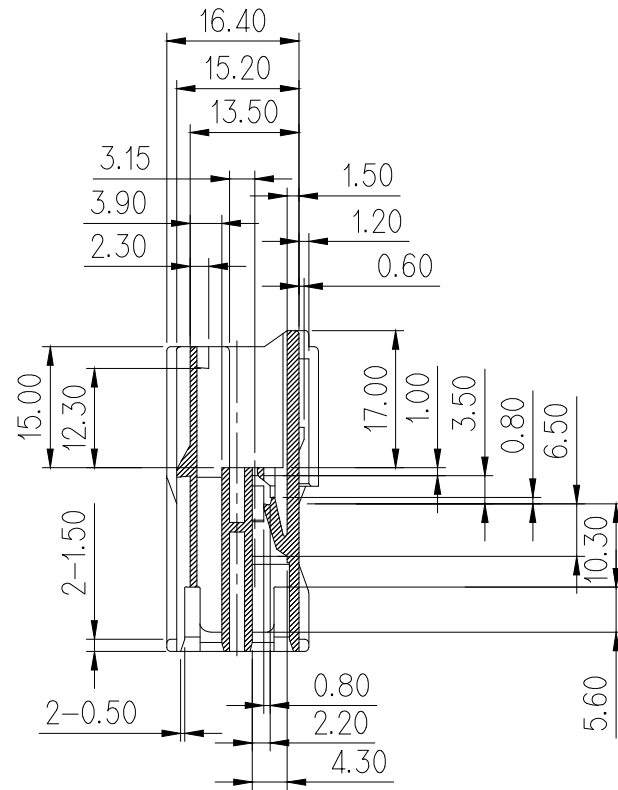
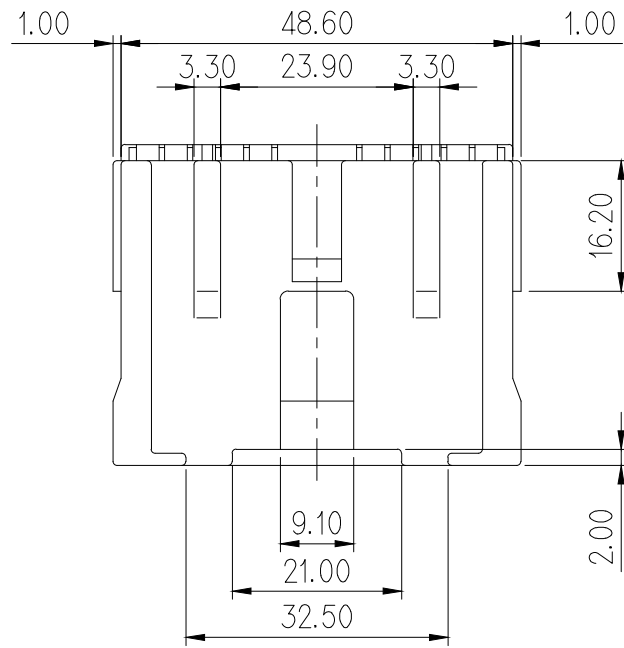
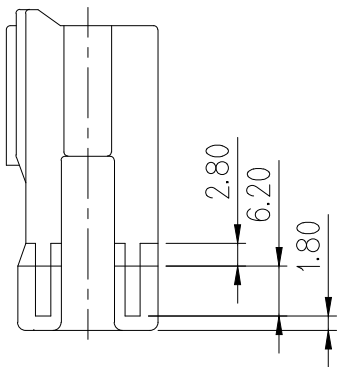
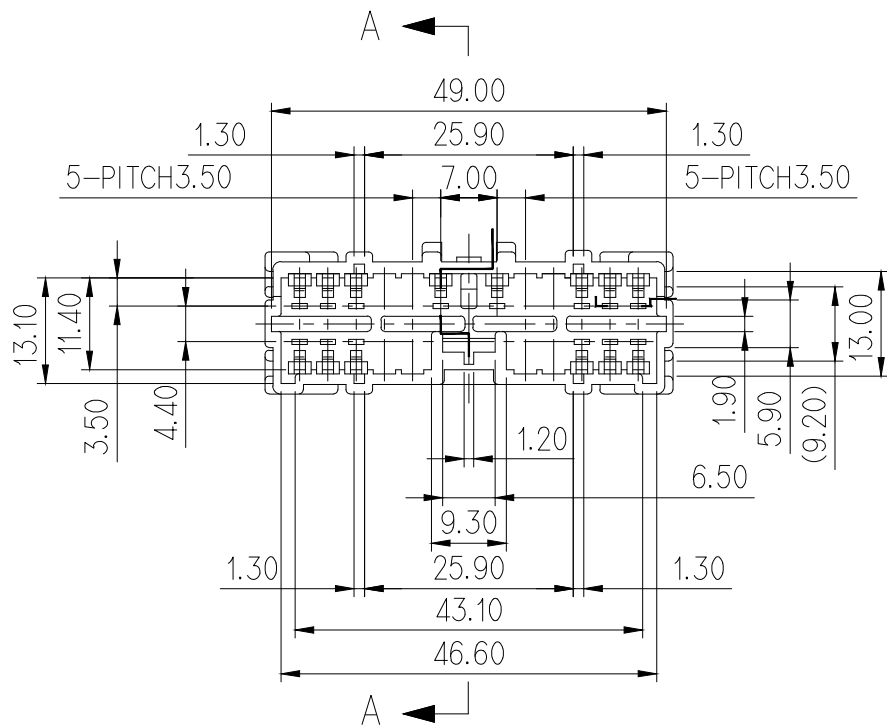


CAVITY (2/1)



주 기

- 기능상 유해한 결함이 없을것(BURR, 미성형, WELDLINE등)
- 지정하지 않은 일반공차는 ± 0.2 로 한다.
- 적용 TERMINAL : ST740484, 485(TAB Term.)
- 상대 HS'G P/NO : MG610786(RECEP. HS'G)
MG630788(REAR HOLDER)
- CONN'T ASS'Y 삽입력 : 14 kgf 이하.
- 단자 고착력 : LANCE 단독 : 6 kgf이상, 총합 : 10 kgf이상
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

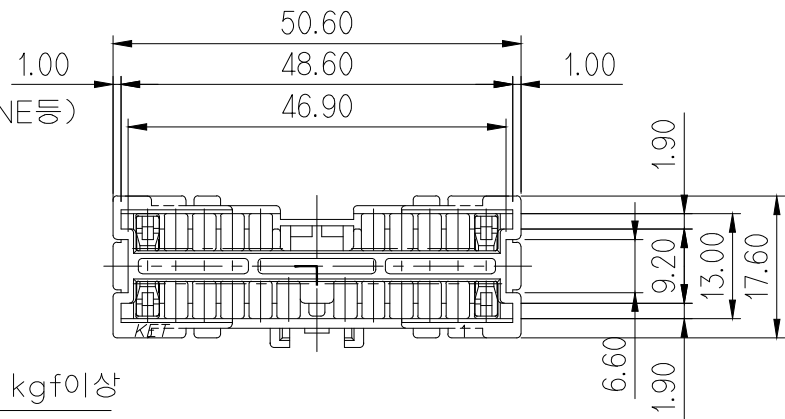

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
± 0.2	± 0.25	± 0.3	$\pm 30'$	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- GENERAL TOLERANCES : ± 0.2
- APPLICABLE TERMINAL : ST740484, 485(TAB Term.)
- APPLICABLE HOUSING P/NO : MG610786(RECEP. HS'G)
MG630788(REAR HOLDER)
- CONN'T ASSY INSERTION FORCE : MAX 14kgf
- TERMINAL RETENTION FORCE: (LANCE MIN 6kgf),
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MEURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		NATURAL		
						WIRE RANGE		CLASS		
						INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ± 0.2		SCALE 1/1	PART NO. MG620787
DR.	JIN	94.12.12	CHK.	sile	94.12.12	PART NAME				
CHK.	JWK		APP.	Watanabe	SDL II CONNECTOR 22P TAB HOUSING					