CUSTOMER DRAWING

PART NO. MG620918

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

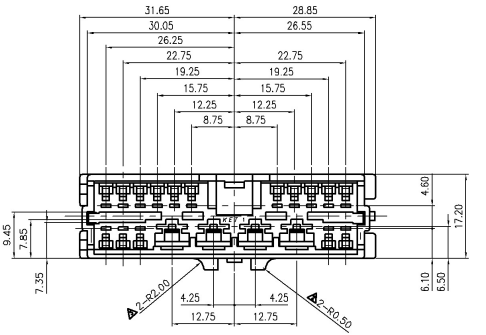

주 기

1. 지시하지 않는 R은 전부 0.5로 할 것.
2. 제품기능상 유해한 BURR, 변형 및 WELDLINE등이 없을 것.
3. 적용 TERMINAL: ST 740470,471,472(.250TYPE : 4 EA)
   ST 740484,485(.070TYPE : 16 EA)
4. 적용 HOUSING: MG 610916, CLIP: MG 630418
5. KET문자, CAVITY NO. : 기울기 15° (문자 h: 0.1~0.2,SIZE=1.5)
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL : ST740470,471,472(250TYPE: 4EA)
   ST740484,485(070TYPE: 16EA)
4. APPLICABLE HOUSING : MG610916, CLIP: MG630418
5. KET MARK, CAVITY NO.: TAPER 15° (H: 0.1~0.2, SIZE: 1.5)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



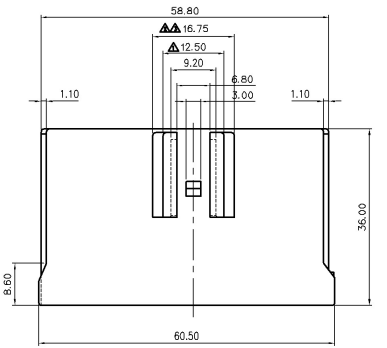



ISSUE MARK

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
	설계사양변경 (G030407)에근거 모든 제작품	KMJ			08.11.27
	시험번호 "050166"적서 도면제작성	SSJ			05.07.26
	시험번호 "020091"적서 도면제작성	LSY			02.07.03

DR. JANG 97.4.30 CHK. 5/22 APP. 5/23

MATERIAL SEE NOTE
FINISH NATURAL
WIRE RANGE
INSULATION
PLATING OF CONTACT SEE TABLE
PART NAME 2507 20M HOUSING
SCALE 2/1
KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
CLASS
TYPE
PART NO. MG620918

(DIMENSIONS IN MM)