

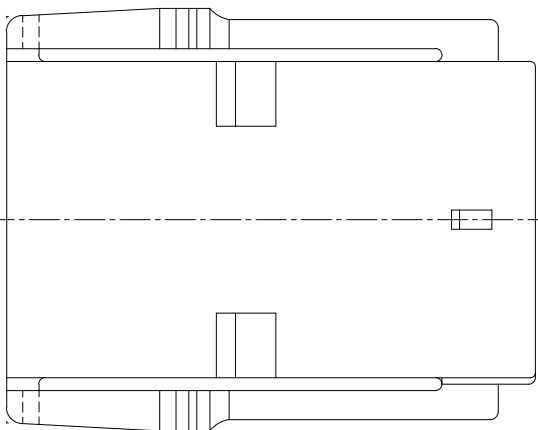
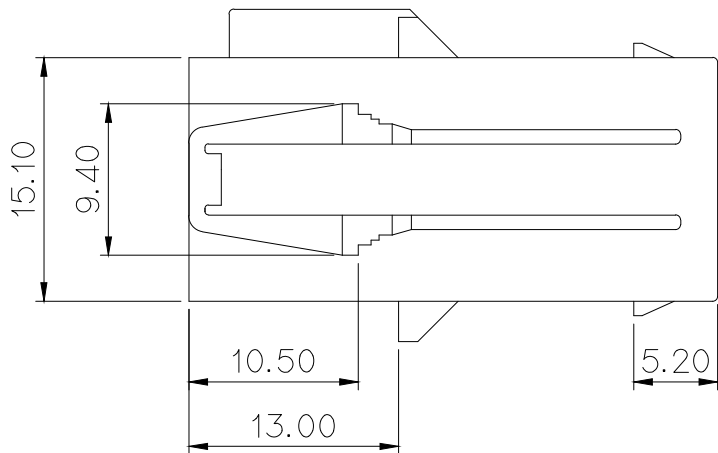
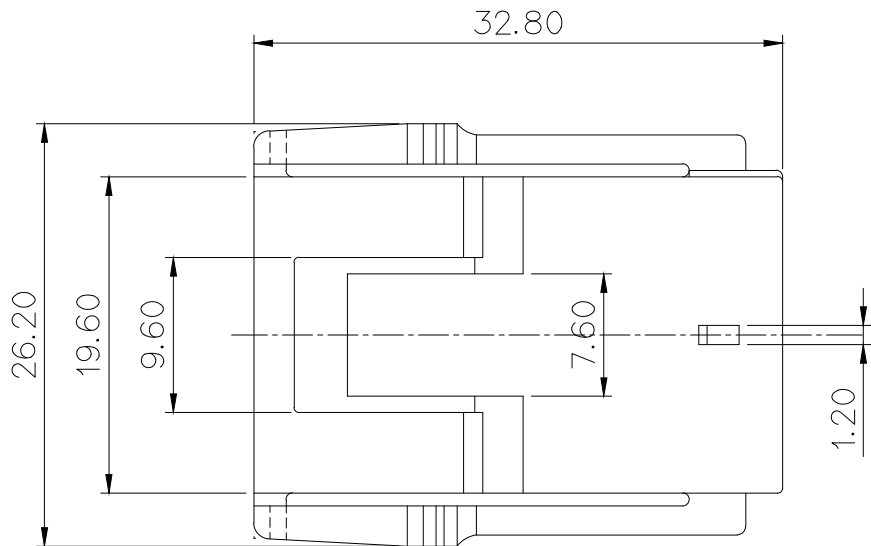
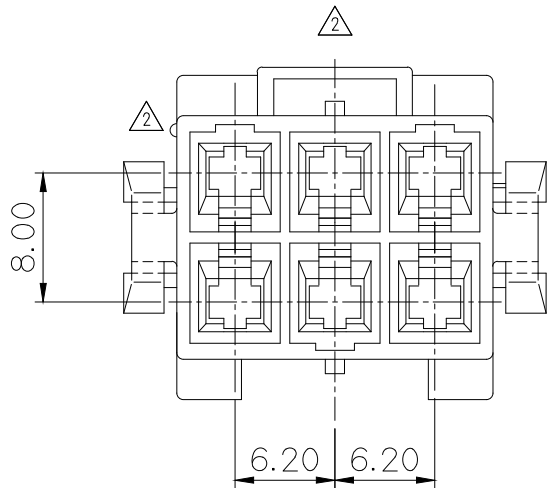
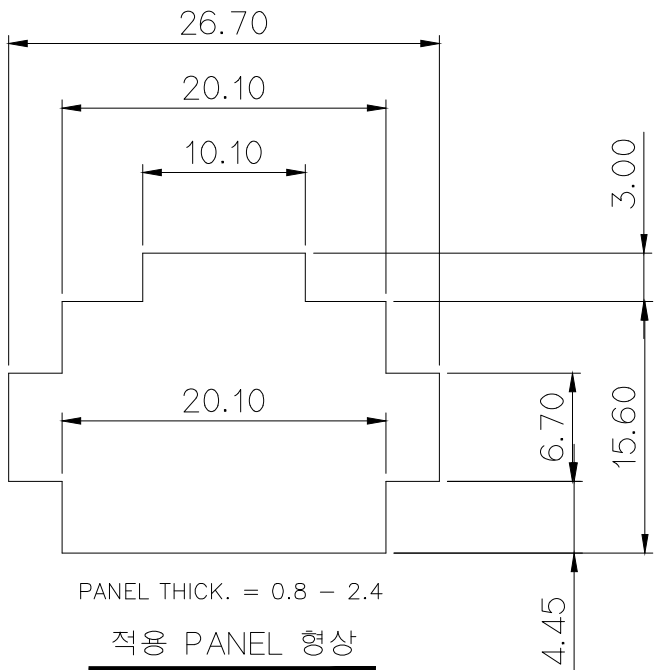


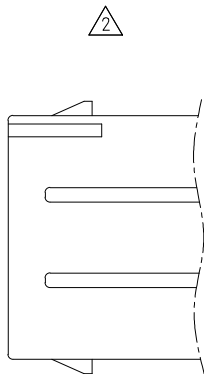

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST740634, 635, 637, 682
- 적용 HOUSING : MG610993
- 적용 REAR HOLDER : MG630878
- 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한최대 허용농도를 초과해서는 안 된다.

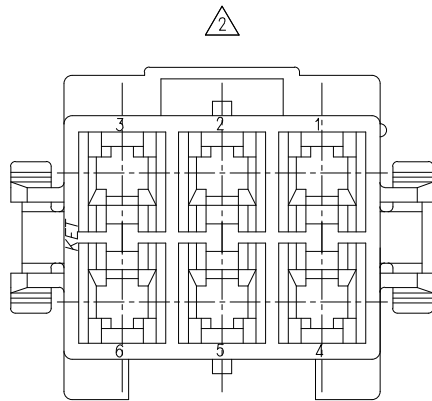

△	NO.	COLOR
*	0	NATURAL
	1	RED
	2	BLUE
	3	YELLOW
	5	BLACK
	6	GREEN

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740634, 635, 637, 682
- APPLICABLE HOUSING : MG610993
- APPLICABLE REAR HOLDER : MG630878
- 10HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE& RoHS REGULATION.

APPROVED

2021-10-21

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH  SEE TABLE			
	ECO-2107-135근거 도면 수정	LYS	BSH	KSH	"21.07.13	WIRE RANGE		CLASS	
	설계사양변경" S110128" 근거 도면 재작성				'11.04.28	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG 620994	
DR. KO 96.12.10		CHK.		12/11		PART NAME			
CHK.  12/11		APP.		12/12		3220 6P REC HS'G			