CUSTOMER DRAWING

REF. NO. MG621158,4364

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



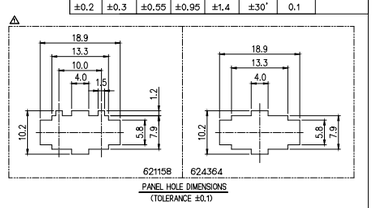

PANEL HOLE DIMENSIONS
(TOLERANCE ±0.1)



NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740463-3, 740464-3 ST740465-3, 740466-3
3. APPLICABLE HOUSING :MG610224, 610224G
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
2.적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
3.적용 HOUSING:MG610224, 610224G
4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안됩니다.



△1 NO.	PART NO.	PANEL GUIDE 유무	개략 형상
1	MG621158	유	
2	MG624364	무	

△2 NO.	MATERIAL	COLOR	MG621158	MG624364
0	P B T (V0)	NATURAL	*	*
1		RED	*	
2		BLUE		
3		YELLOW		
4		GRAY		
5		BLACK		
6		GREEN		

ISSUE MARK

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
△1	ECO-19KO-417 근거 도면 제작임	TSU	KHG		'19.10.31
△2	칼라사양변경(GN0G0B)및 도면 제작임	CHL			'11.04.28
△3	칼라사양변경(GN0G0B)및도면 수정	PSH			'06.03.19
	DR. KO. 96.04.29	CHK.	04.30		05.02
	CHK.		05.02		

MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH	SEE TABLE		
WIRE RANGE		CLASS	
INSULATION		TYPE	
GENERAL TOLERANCE	SEE TABLE	SCALE 2/1	PART NO. MG621158,4364
PART NAME	1806 2M HOUSING (낚기 보호 GUIDE)		

APPROVED
2019-11-06
KOREA ELECTRIC TERMINAL CO., LTD.
Electronic Product Development Team