
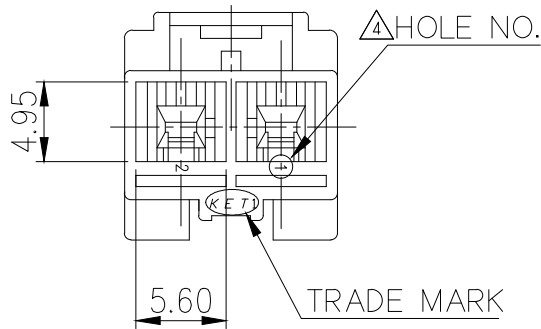
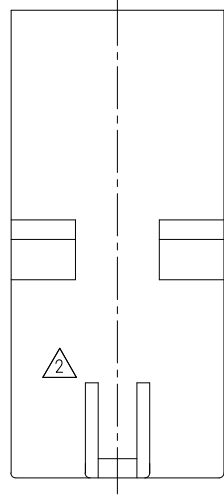
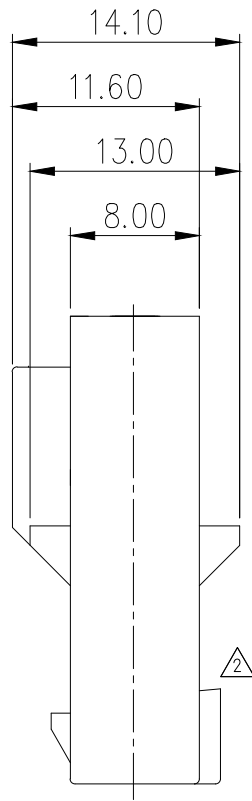
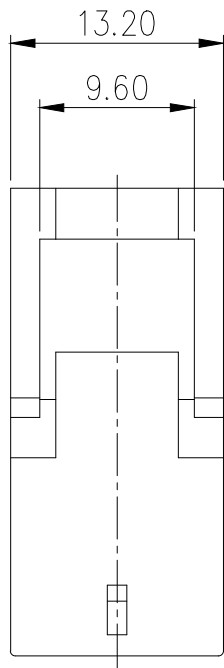
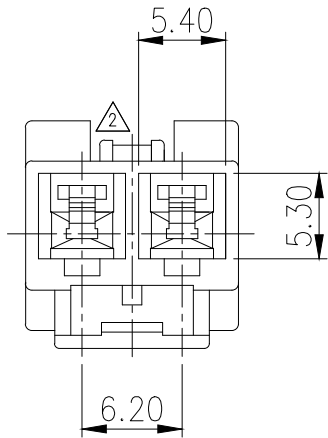


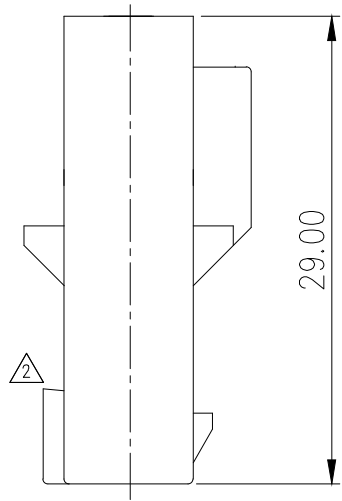

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
- △ 3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
- △ 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.



PART NO.	MATERIAL
MG621164	PBT(V0)
MG621164G	PBT+PC(GWIT)

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

△ 5	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19	MATERIAL △SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
△ 4	ECO-1109-234에 의거 도면 재작성	형	형	형	11.09.29	FINISH NATURAL	
△ 3	설계사양변경서'S110128'근거 도면재작성	KSH	형	형	11.04.29	WIRE RANGE	CLASS
△ 2	설계사양변경서S100006근거 도면 재작성	PJM	형	형	10.01.08	INSULATION	TYPE
△ 1	설계사양변경서S04074근거 P/No. 추가	LSY	형	BACK	04.08.25		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR.	KO. 96.07.16	CHK.	형	07/16		SCALE 2/1	PART NO. △SEE TABLE
CHK.		APP.	형	07/16		PART NAME 1806 D/L 2P REC HS'G	