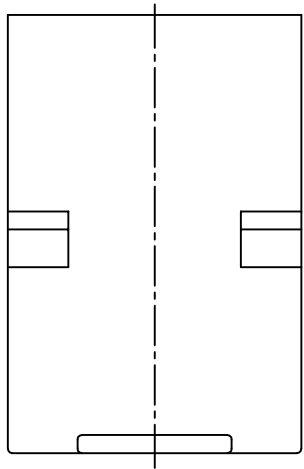
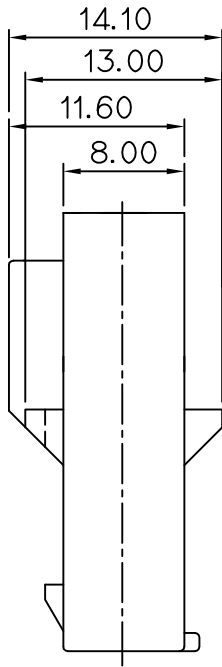
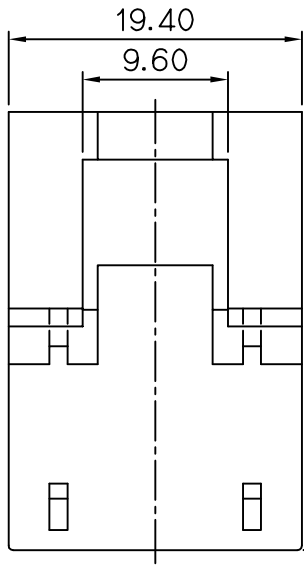
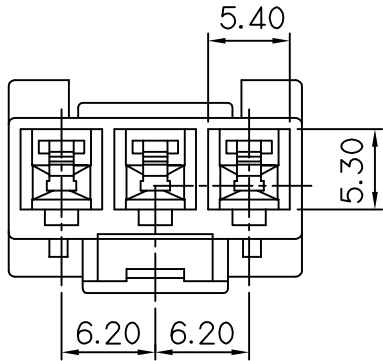
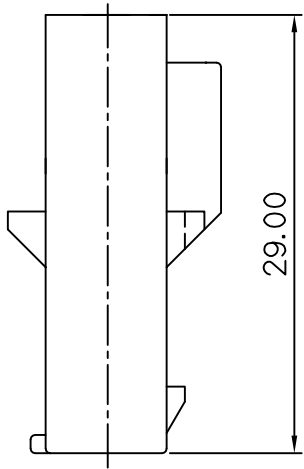


△	PART NO.	MATERIAL
△	MG621167	PBT (94V-0)
△	MG621167G	PBT (GWIT)
△	MG621167T	PBT (GWIT)

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730690,691,692,693,871-3
- APPLICABLE HOUSING : MG611166
- APPLICABLE R/HOLDER : MG631168-2
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740690,691,692,693,871-3
- 적용 HOUSING: MG611166
- 적용 R/HOLDER: MG631168-2
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL PBT (VO)		IKIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH NATURAL			
△	설계사양변경서'S110128'근거 도면재작성		KSH	5/8	11.04.29	WIRE RANGE		CLASS	
△	사양추가에 따른 P/NO. 추가		JJY	7/8	07.05.14	INSULATION		TYPE	
△	S040114근거 P/NO. 추가			7/8	04.08.25	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG621167
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		
DR.	KO 96.06.26		CHK.	7/8		6/26	1806 D/L 3P REC. HS'G		
			APP.	CHOSI		6/26			

ISSUE MARK