
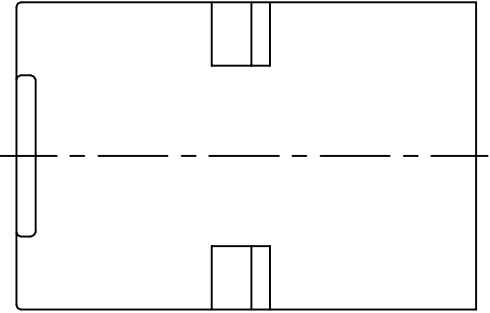
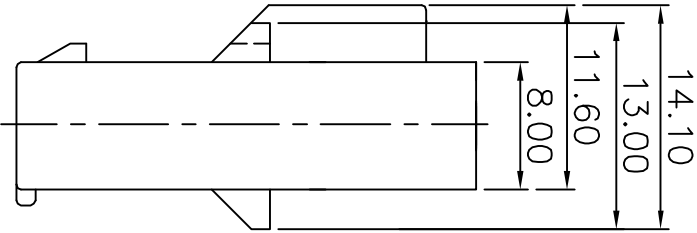
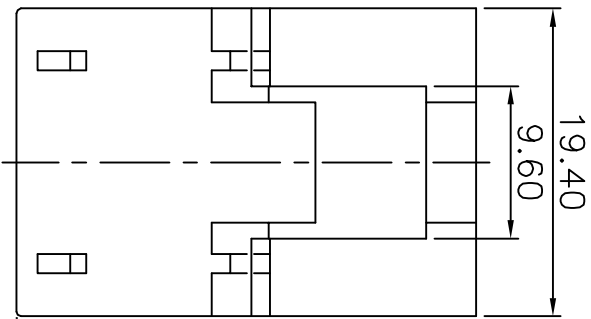
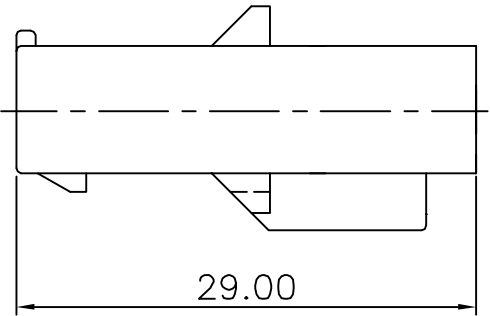



(DIMENSIONS IN MM)

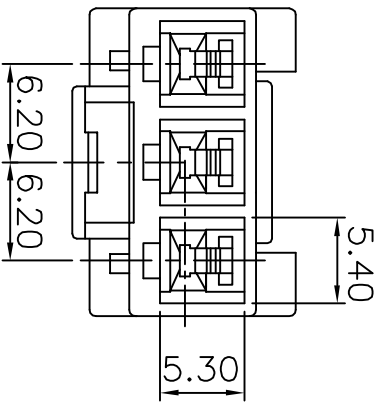

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730690,691,692,693,871-3
- APPLICABLE HOUSING : MG611166
- APPLICABLE R/HOLDER : MG631168-2
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

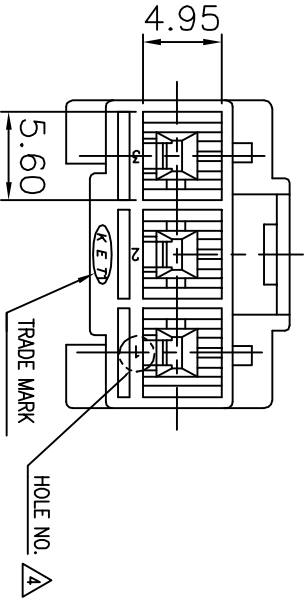

주 기

- 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730690,691,692,693,871-3
- 적용 HOUSING: MG611166
- 적용 R/HOLDER: MG631168-2
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

5	ECO-1405-062극기 도면 제작명	LCM	KSH	BUC	14.05.16	MATERIAL	SEE TABLE
4	ECO-1109-234극기 도면 제작명	KSH	KSH	11.09.29	FINISH	NATURAL	
3	설치시변경시110128극기 도면제작명	KSH	KSH	11.04.29	WIRE RANGE		CLASS
2	시공작기에 따른 P/NO. 추가	JY	JY	07.05.14	INSULATION		TYPE
1	S040114극기 P/NO. 추가	JY	JY	04.08.25	SCALE	2/1	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE		SEE TABLE
DR.	KO 96.06.26	CHK.	CHK.	APP.	96.06.26	PART NAME	1806 D/L 3P REC. HS'G

PART NO.	MATERIAL
MG621167	PBT (VO)
MG621167G	PBT+PC(VO)
MG621167T	PET+PC(GWIT)