
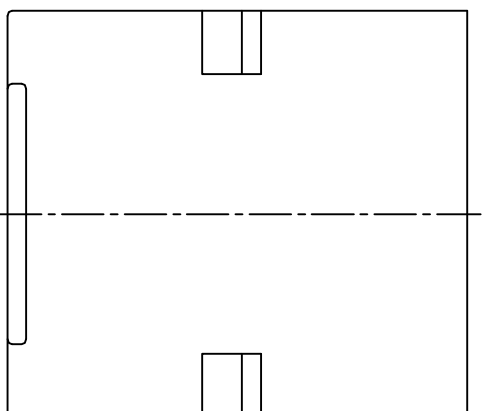
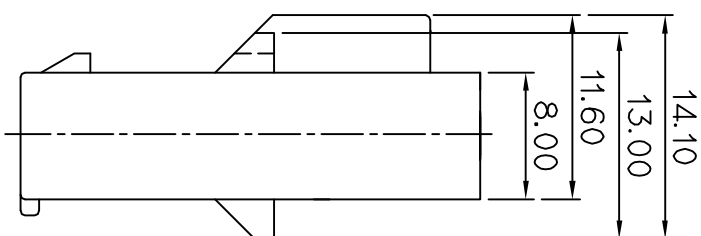
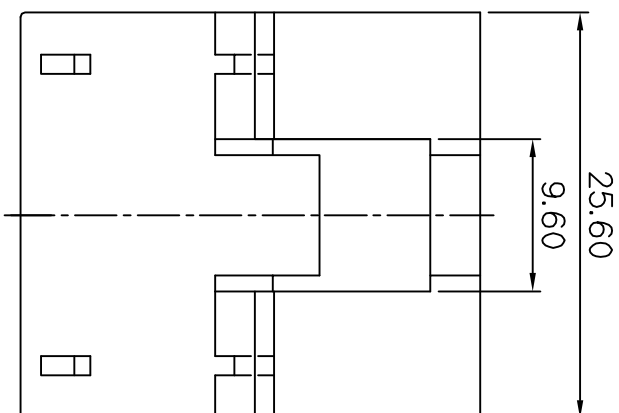
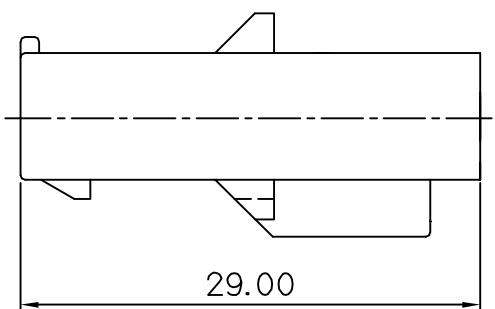


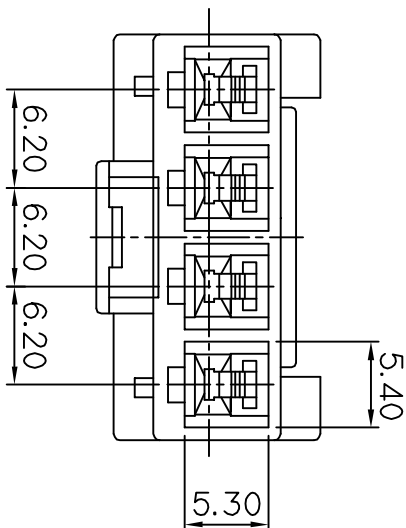


GENERAL TOLERANCE (HOUSING)						USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690,691,692,693,871-3
3. APPLICABLE HOUSING : MG611169
4. APPLICABLE R/HOLDER : MG631171-2
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST740690, 691, 692, 693, 871-3
3. 적용 HOUSING: MG611169
4. 적용 R/HOLDER: MG631171-2
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정 한 최대 허용 농도를 초과해서는 안된다.

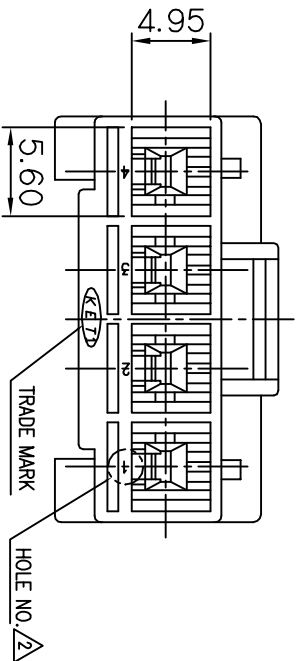

ISSUE MARK

		MATERIAL	PBT (VO)	KIEIT KOREA ELECTRIC /ENGINEERED TERMINAL CO., LTD.
		FINISH	NATURAL	
		WIRE RANGE		CLASS
△	ECC-1109-234에 의거 도면 제작상	1109	11.09.29	
△	실시방법은경사시10128 근거 도면제작상	KSH	—	TYPE
LTR	REVISION RECORD	DR. CHK.	APP.	SCALE
D.R.	KO 96.07.16	CHK.		PART NO.
			DATE	
D:\sign\mk.jpg		7/27	APP.	D:\sign\app-kor
				7/27
PART NAME		TOLERANCE SEE TABLE EXCEPT AS NOTED	2/1	
1806 D/L		4P REC. HS'G		