
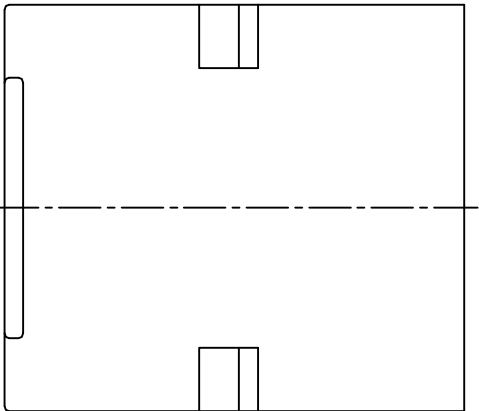
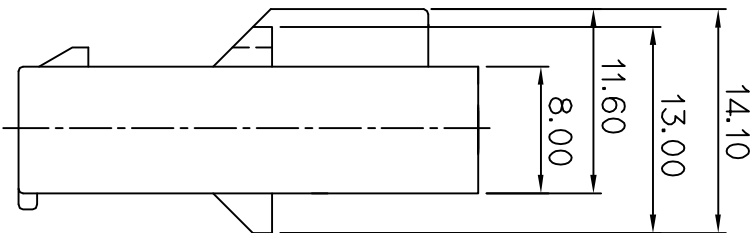
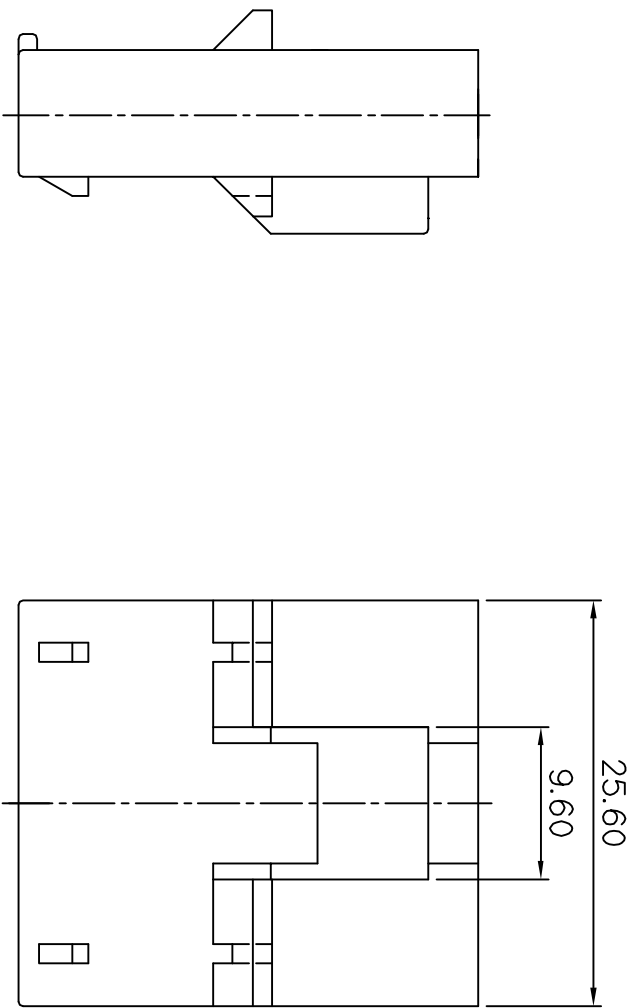


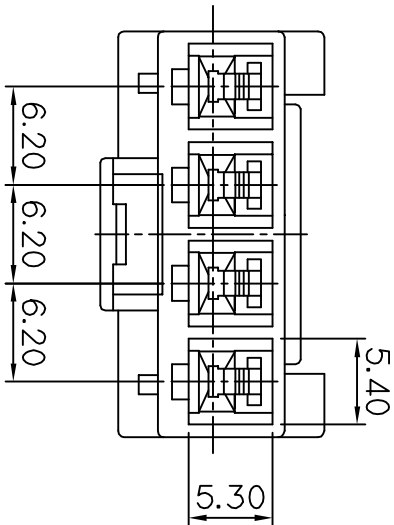


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690,691,692,693,871-3
3. APPLICABLE HOUSING : MG611169T
4. APPLICABLE R/HOLDER : MG631171-2
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST740690, 691, 692, 693, 871-3
3. 적용 HOUSING: MG611169T
4. 적용 R/HOLDER: MG631171-2
5. 제폭내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정 한 최대 허용 농도를 초과해서는 안 된다.

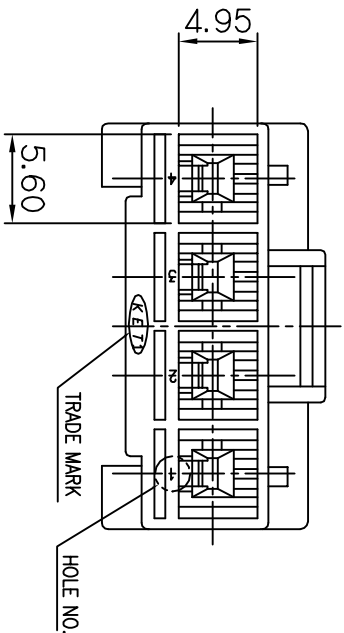

				MATERIAL	△PET+PC(GWIT)	KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	NATURAL	
				WIRE RANGE	CLASS	
				INSULATION	TYPE	
△	EEO-1409-113 근거 도면 시작함	LCM	KSH	BUC	'14.09.19	
LTR	REVISION RECORD	DR	CHK	APP.	DATE	
DR	LCM. '12.09.05		CHK	KSH.	'12.09.05	
CHK		APP.	YKH	'12.09.05		
PART NAME						TOLERANCE EXCEPT AS NOTED
				SEE TABLE	SCALE 2/1	PART NO.
1806 D/L 4P REC. HS'G						MG621170T