

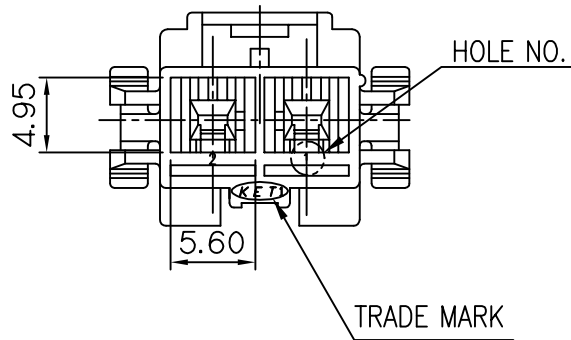
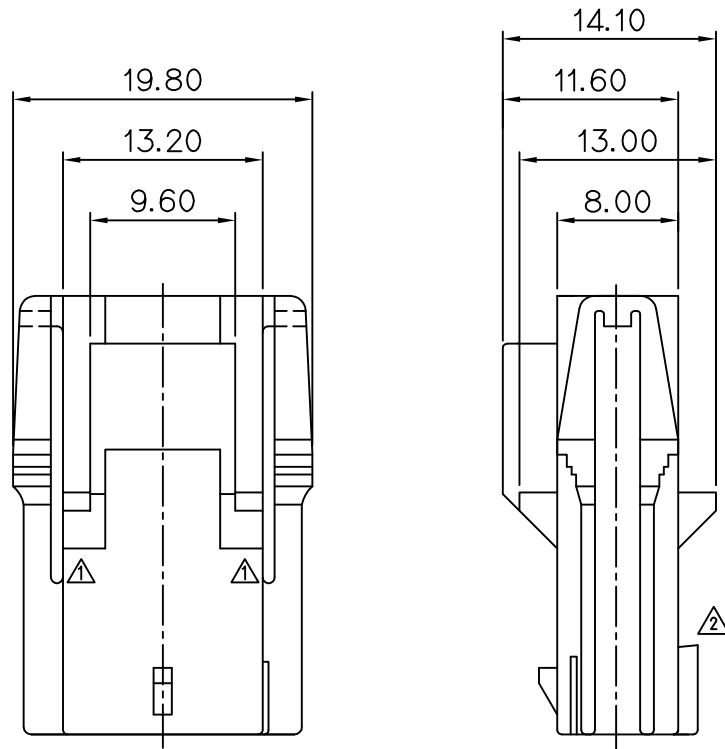
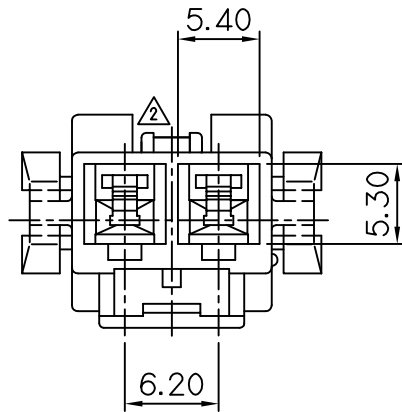


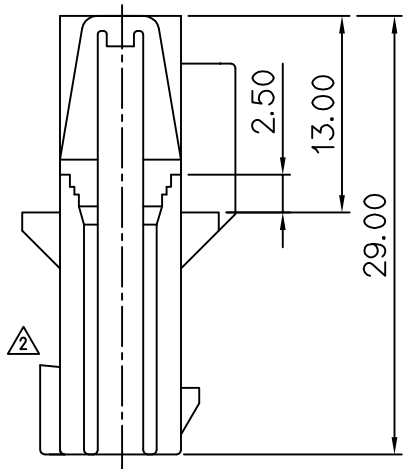

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

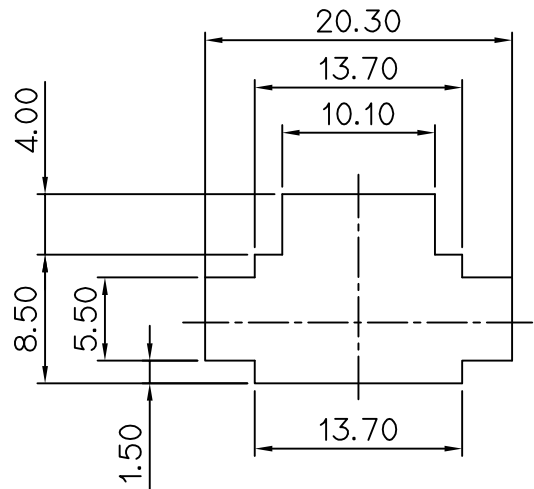

Panel hole dimensions tolerance ±0.1(mm)
(Applicable panel thickness : 0.8~ 2.4 mm)

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK

					MATERIAL PBT(94-0)		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH NATURAL			
③	설계사양변경서'S110128'근거 도면재작성	KSH	<i>5/8</i>	11.04.29	WIRE RANGE		CLASS	
②	설계사양변경서S100006근거 도면 재작성	PJM	<i>PJM</i>	'10.01.08	INSULATION		TYPE	
①	PANEL 장착성 개선	OJM	KO <i>AK</i>	'00.03.28				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR. KO. 96.07.16		CHK.				SEE TABLE	2/1	MG621173
CHK. <i>2-9</i>		APP. <i>CHOSM</i>			PART NAME			
					1806 D/L 2P REC HS'G			