

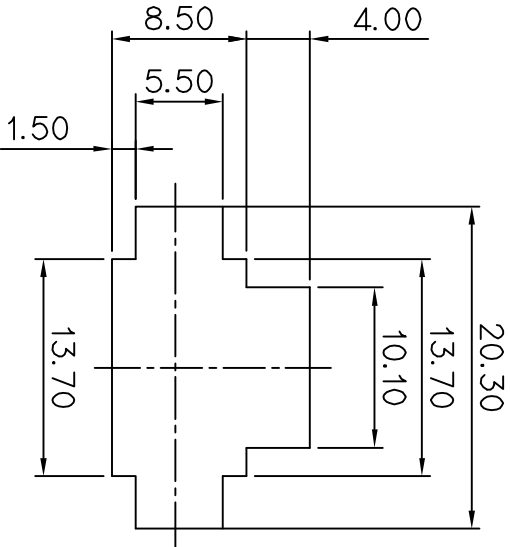
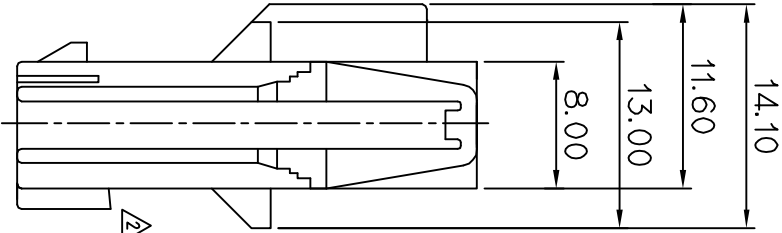
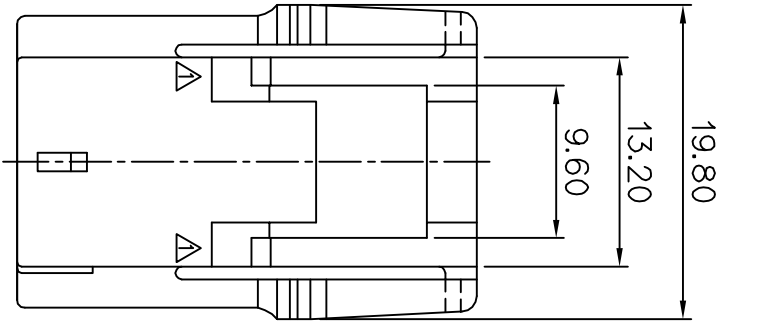
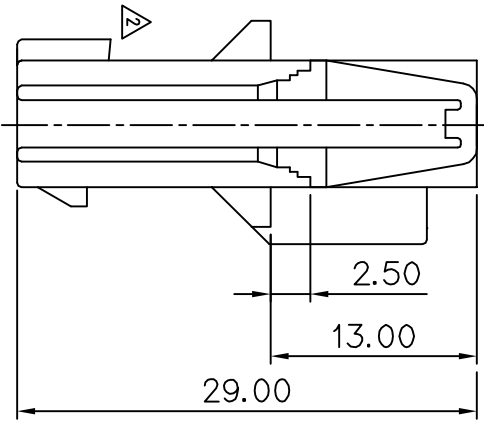
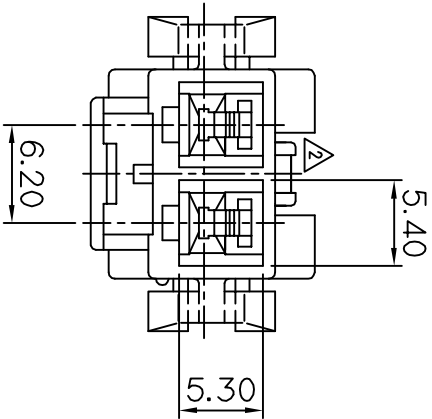


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

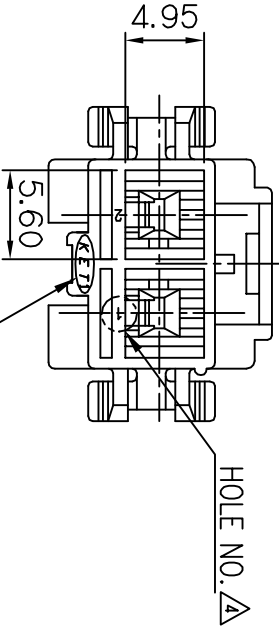

Panel hole dimensions tolerance ±0.1(mm)
(Applicable panel thickness : 0.8~ 2.4 mm)

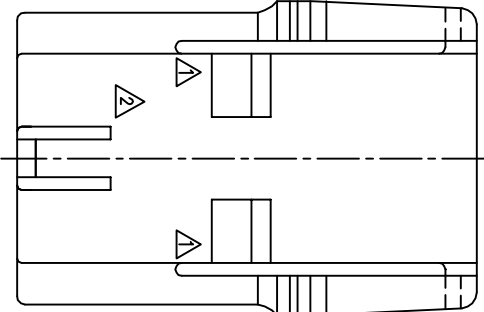

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없음것.
- 2.적용 TERMINAL : ST740690,691,692,693,871-3
HOUSING : MG611163
REAR HOLDER : MG631165
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

						MATERIAL	PBT(94-0)	ISSUE MARK	
						FINISH	NATURAL		
						WIRE RANGE			
						INSULATION			
						TYPE			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	SEE TABLE	SCALE	PART NO.
DR.	KO. 96.07.16	CHK.				PART NAME	1806 D/L 2P REC HS'G		MG621173
CHK.	주 기	APP.							