
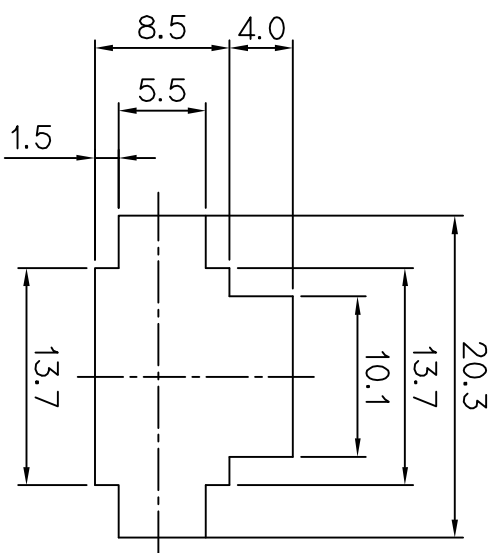
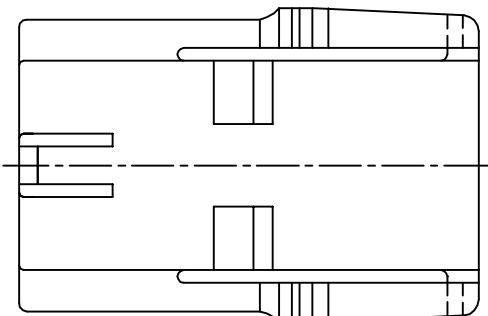


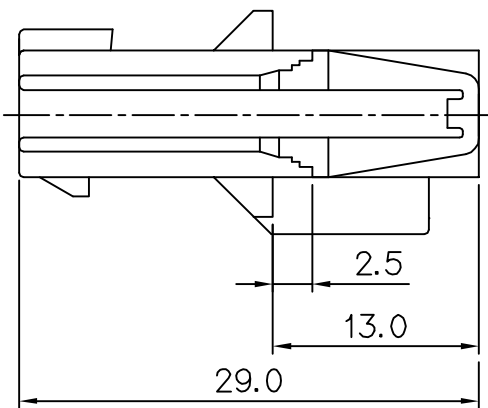

Panel hole dimensions tolerance ± 0.1 (mm)
 (Applicable panel thickness : 0.8~ 2.4 mm)

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST740690,691,692,693

HOUSING : MG611163

REAR HOLDER : MG631165


3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,

Mercury, Cadmium, Hexavalent Chromium, PBBs,

PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE

CONCENTRATION PRESCRIBED UNDER EU ELY DIRECTIVE

& ROHS REGULATION

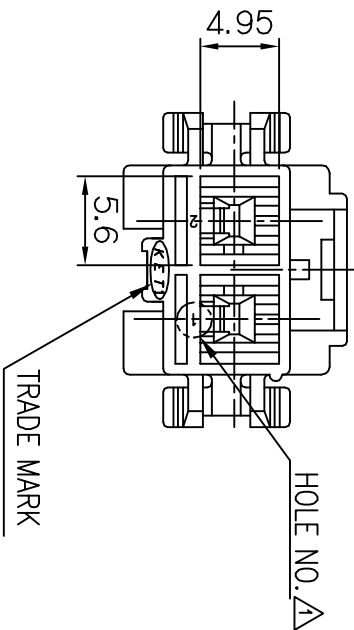

1.기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 TERMINAL : ST740690,691,692,693

HOUSING : MG61163

REAR HOLDER : MG631165

3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬

PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정

최대 허용치를 초과해서는 안 된다.

GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

				MATERIAL	△PET+PC(GWIT)	KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	NATURAL	
				WIRE RANGE	CLASS	
				INSULATION	TYPE	
L7R	REVISION RECORD	DR.	CHK.	TOLERANCE EXCEPT AS NOTED	PART NO.	
				SCALE		
DR.	LCM 2011.05.31		CHK. KSH 2011.05.31	SEE TABLE	2 / 1	MG621173T
CHK.		APP. YJH 2011.05.31		PART NAME		
1806 D/L 2P REC HS'G						