
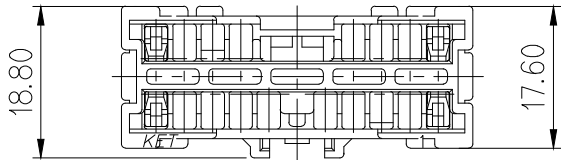
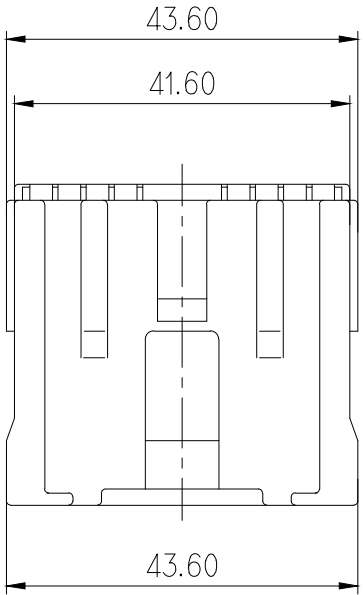
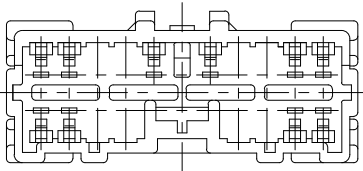



NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

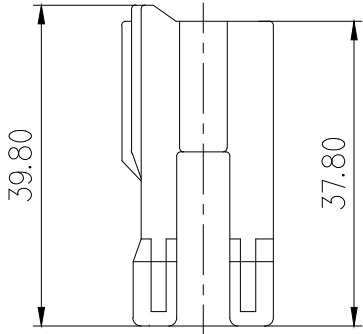

GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

주 기

- 지시하지 않은 R은 0.5임.
- 적용 TERMINAL : ST740484, ST740485
- 상대 HOUSING P/NO : MG611179
- KET문자 CAVITY NO :  TYPE 기울기 15°
(문자 높이 = 0.1~0.2, SIZE = 1.0)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

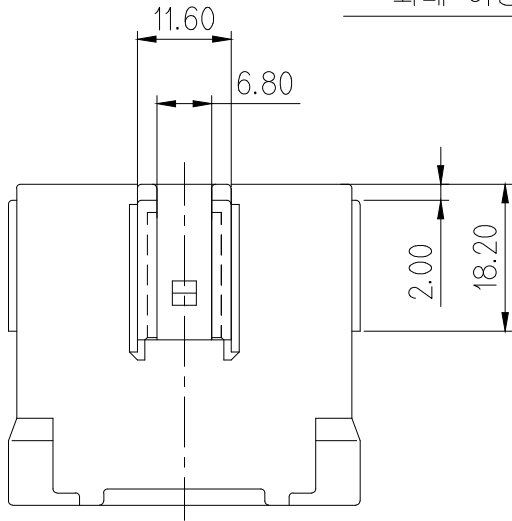

NOTE

- UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.5 RADIUS.
- APPLICABLE TERMINAL : ST740484, ST740485
- MATING HOUSING P/NO : MG611179
- KET MARK CAVITY NO :  TYPE TAPER 15°
(H; 0.1~0.2, SIZE; 1.0)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		
					INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ± 0.20	SCALE 2/1	PART NO. MG621180
DR.		CHK.				PART NAME			
CHK.		APP.				SDL II 18P REC. HS'G			

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK