

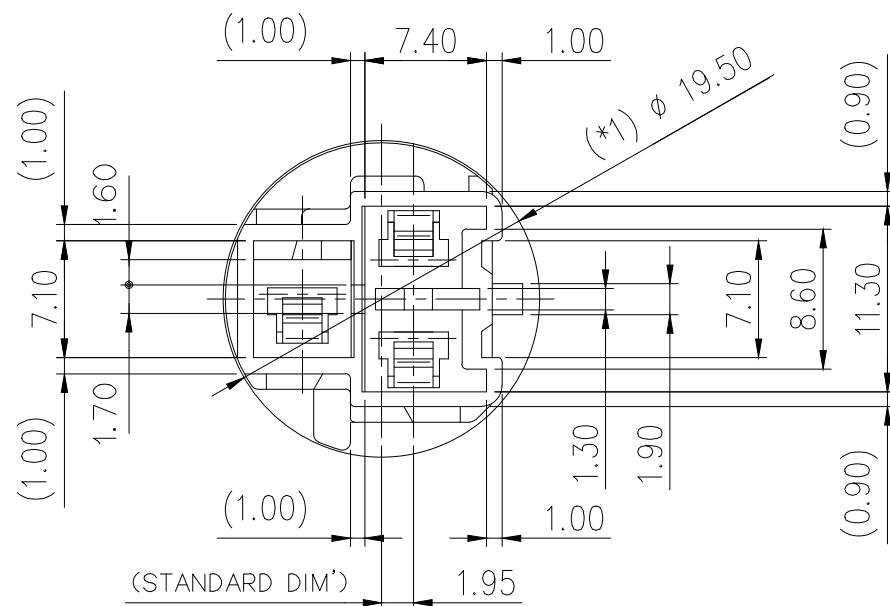
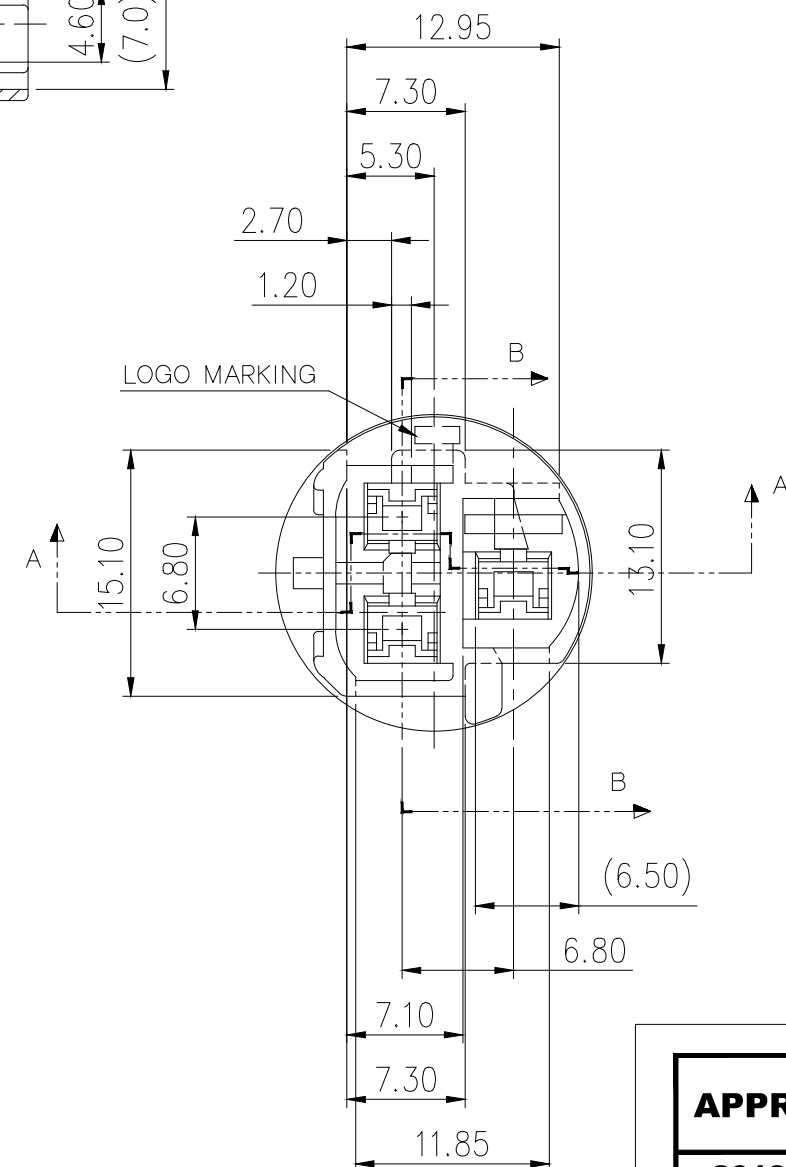
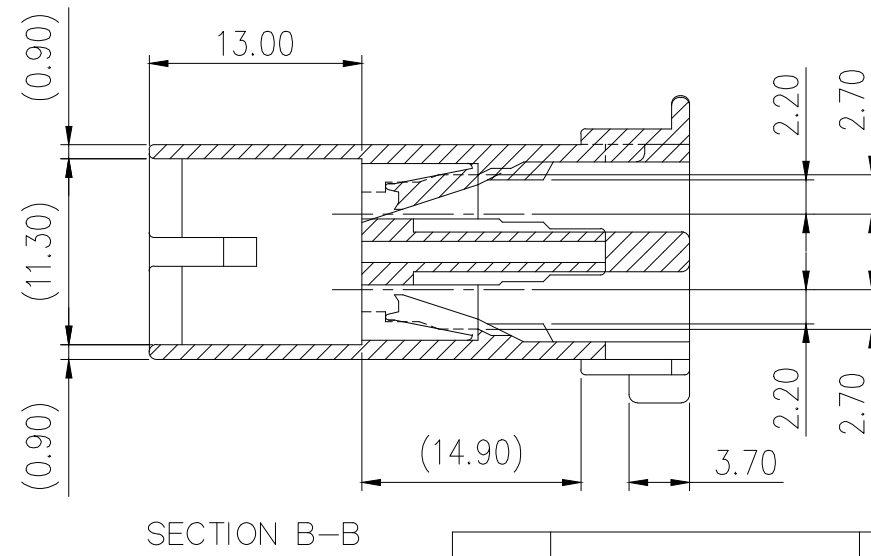


1. (*1) 본 제품은 ϕ 19.5의 HOLE을 통과할것.
2. 제품기능상 유해한 변형, BURR, WELD LINE 등이 없을것.
3. 적용 TERMINAL ; ST740700 (7114-1230)
ST740701 (7114-1231)
4. 상대HOUSING ; MG611254 (7123-1933-30)
5. LOGO, CAVITY NO ; 기울기 15°, 크기 0.8 높이 0.2 일것.
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	MG611254
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	MG631256

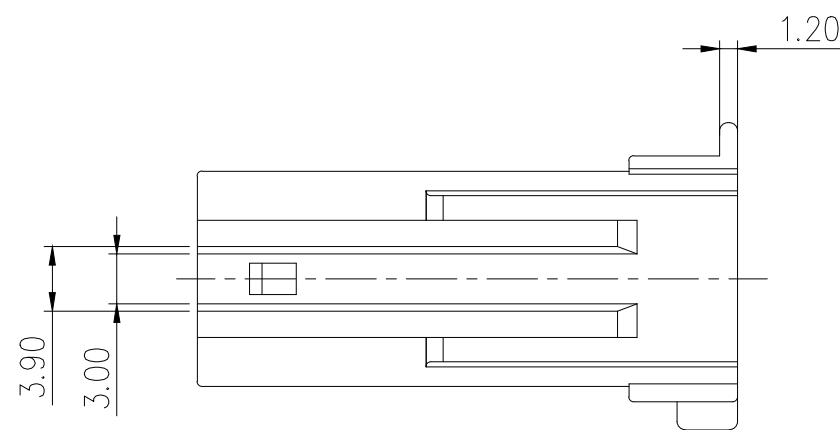

1. (*1)THIS PRODUCT SHOULD PASS THROUGH HOLES
WITH A DIAMETER OF 19.5
2. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL ; ST740700 (7114-1230)
ST740701 (7114-1231)
4. MATCHING HOUSING ; MG611254 (7123-1923-30)
5. LOGO,CAVITY NO : TAPER 15°, (SIZE; 0.8, H; 0.2)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV
DIRECTIVE.

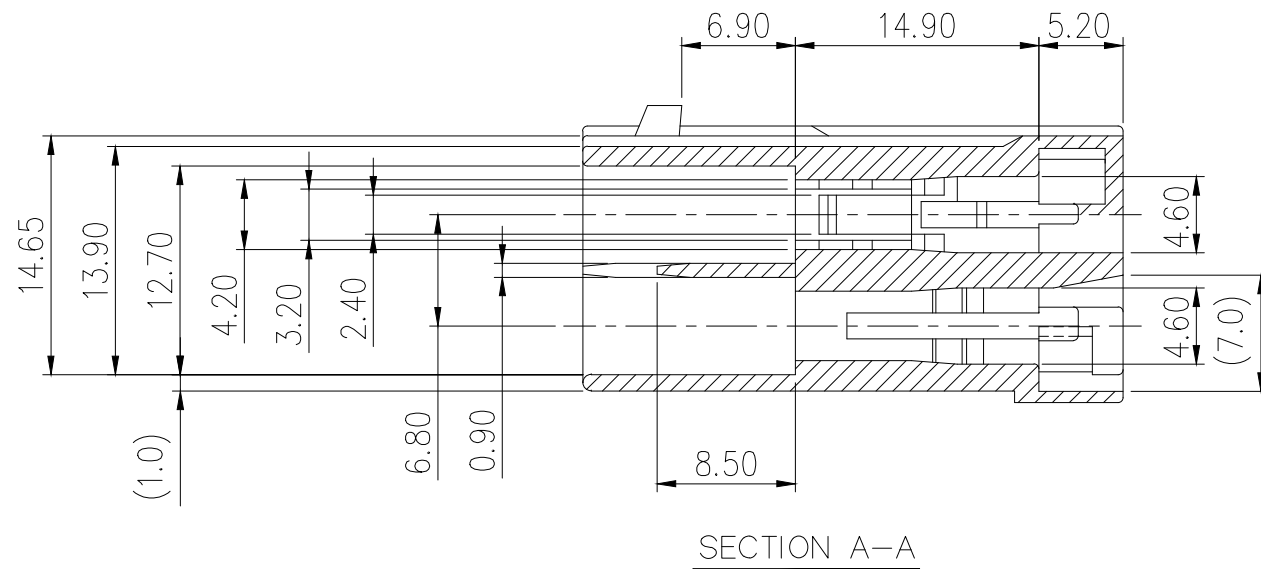

APPROVED
2018-12-07
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.

ISSUE MARK

				MATERIAL		P B T	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH		BLACK	
				WIRE RANGE		CLASS	
				INSULATION		TYPE 7122-1933-30	
LTR	REVISION RECORD		DR.	CHK.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE
DR.	KJ KIM 98.1.9		CHK.		JJH 1/10	SEE TABLE	PART NO.
CHK.	JANG 1/10		APP.		Watanabe 1/10	MG621255	
						T - 3P REC. HOUSING	