
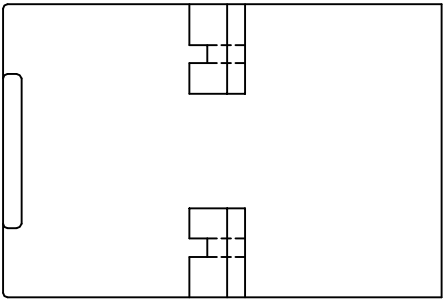
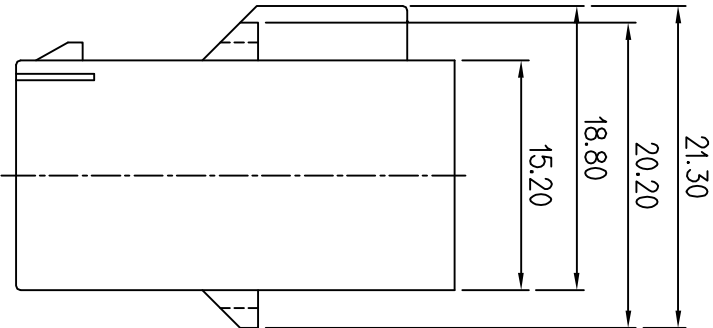
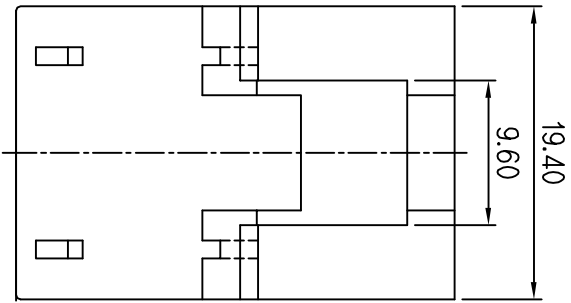
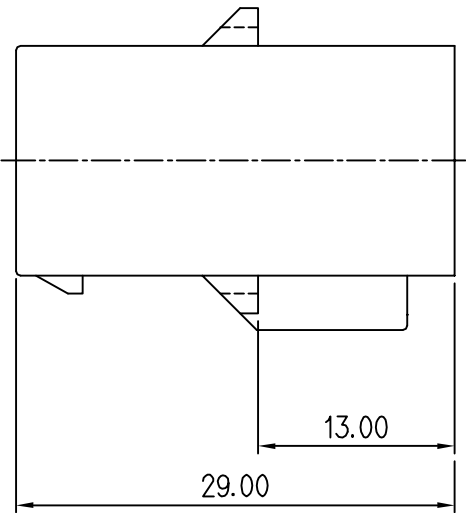


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1


PART NO.	MG621470
----------	----------

CUSTOMER DRAWING

DIMENSIONS IN MM

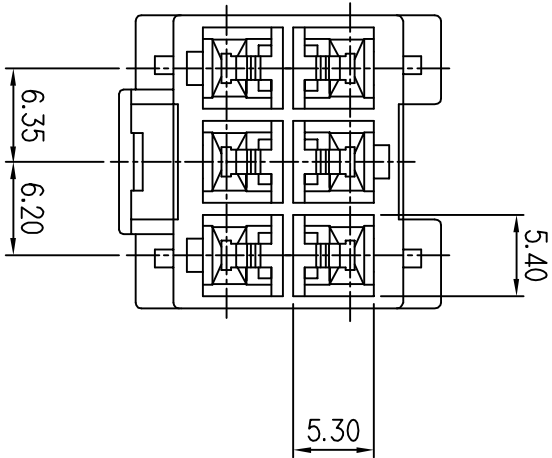

- NOTE
- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 2. APPLICABLE TERMINAL : ST740690,691,692,693
 - HOUSING : MG611468
 - REAR HOLDER : MG631168
 - 3. GHAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

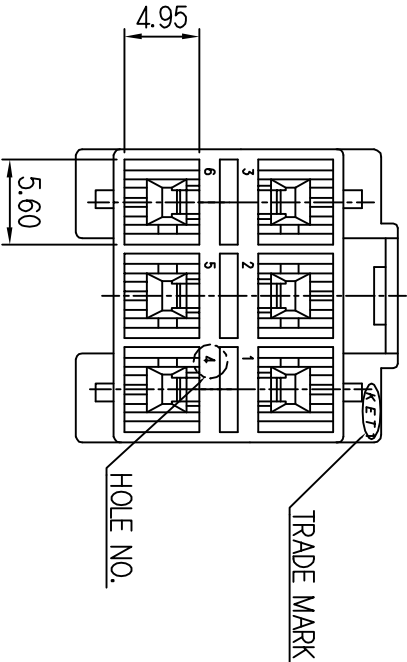

- 주 기
- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2.적용 TERMINAL : ST740690,691,692,693
 - HOUSING : MG611468
 - REAR HOLDER : MG631168
 - 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

					MATERIAL	PBT	KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	NATURAL	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
△	설계서명변경(St10128)근거도면제작성	HEE	98.1.14	11.04.28			
△	PART NO. 변경	HEE	98.1.14				
LTR	REVISION RECORD	DR.	CHK.	APP.	TOLERANCE EXCEPT AS NOTED		
DR.	KO 97.06.03	CHK.			SEE TABLE	SCALE	PART NO.
CHK.	6/5	APP.			1806 D/L 6P REC HS'G	2/1	MG621470

ISSUE MARK