





ISOMETRIC VIEW

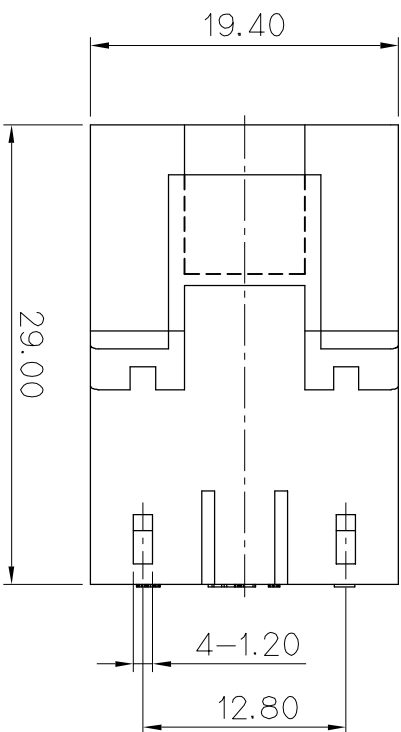

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG611468T
- TERMINAL : ST740871-3/690-3/691-3/692-3/693-3
- REAR HOLDER : MG631168-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

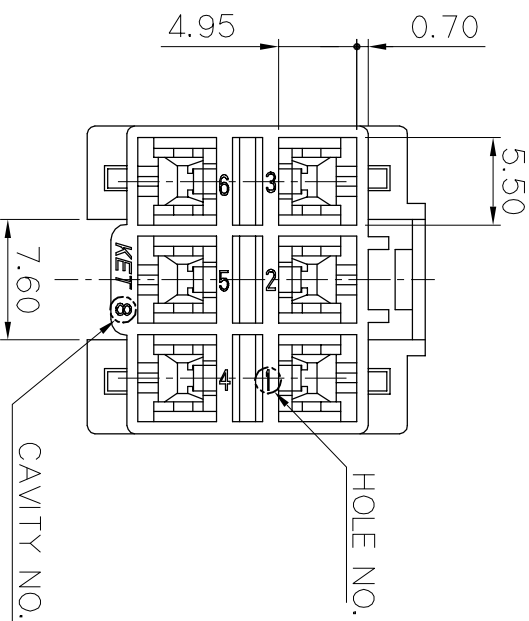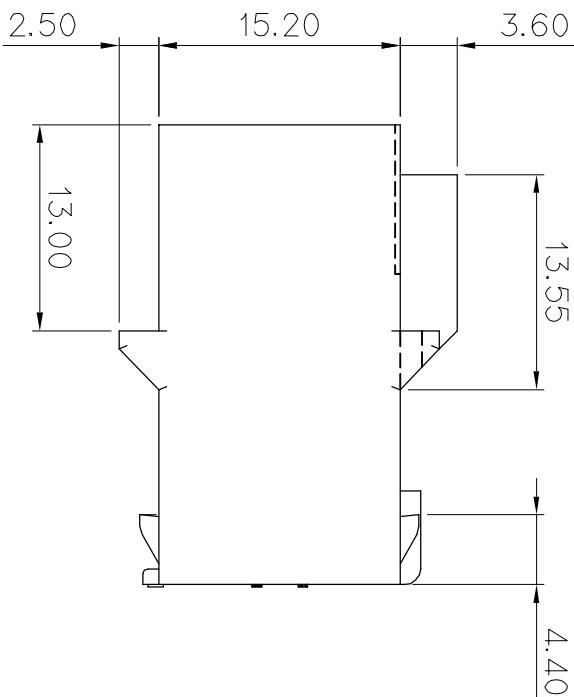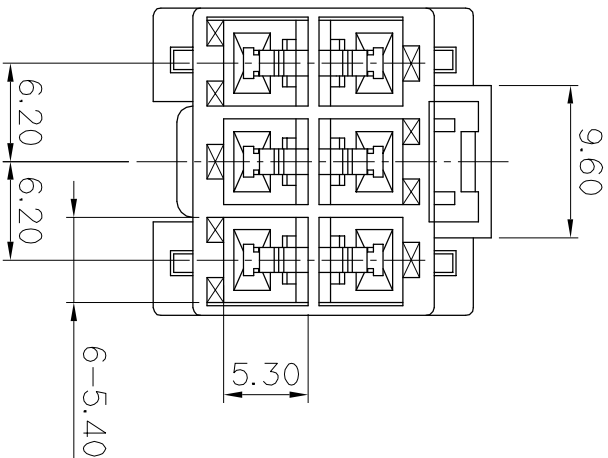

주 기

1. 기능상 우회한 BURR 및 WELDLINE 등이 없을것.

2. 작품 하위제 : MG611468T

터미널 : ST740871-3/690-3/691-3/692-3/693-3

리플렛 : MG63168-3

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

					MATERIAL	PET+PC (GWIT)	KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	NATURAL	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
						1806 D/L	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	PJM '12.02.28	CHK. <i>2/1/28</i>	2/1/28		SEE TABLE	2/1	MG621470T
CHK.		APP. <i>2/1/28</i>	2/1/28		PART NAME	1806DL 6M HSG_GWIT	