


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

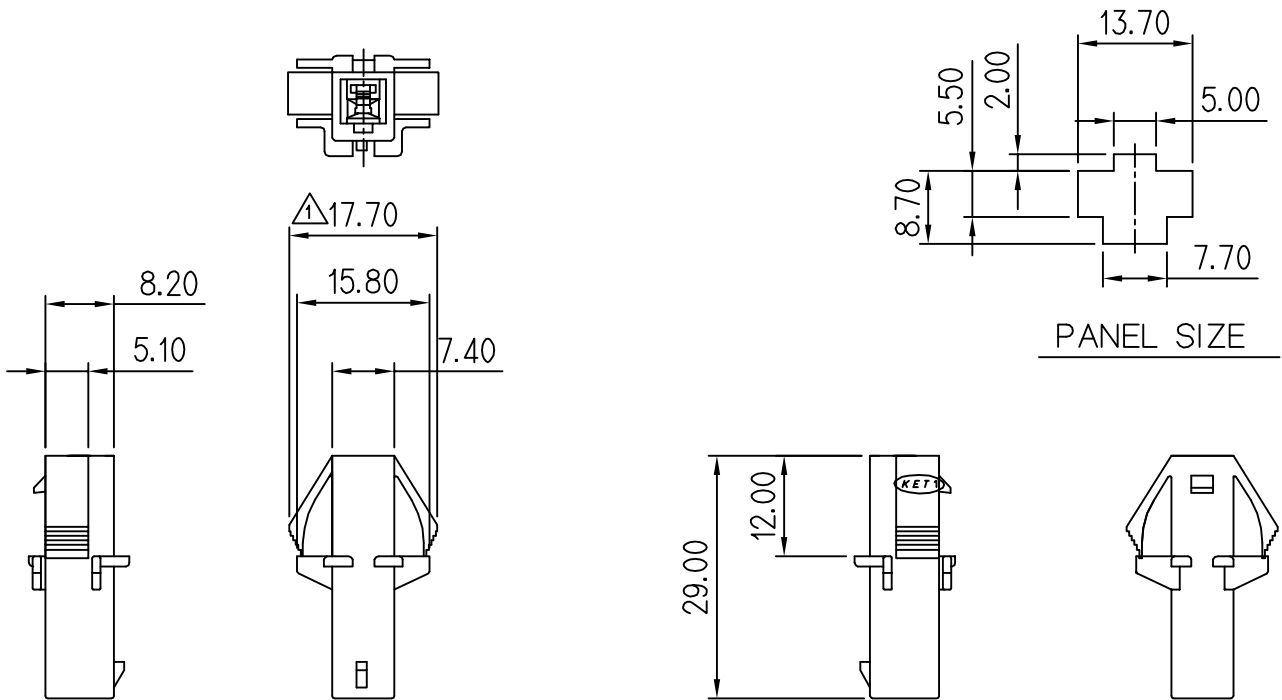

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690,691,692,693
3. APPLICABLE HOUSING : MG611532
4. APPLICABLE REAR HOLDER : MG635135
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST740690,691,692,693
3. 적용 HOUSING : MG611532
4. 적용 REAR HOLDER : MG635135
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

					MATERIAL	PBT (V0)	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	NATURAL	
2	설계사양변경(S110128)근거 도면 제작성	김영진	정재민	'11.04.28	WIRE RANGE		CLASS
1	설계사양변경(S110011)근거 도면 변경	KSH	정재민	'11.01.10	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	KO	'98.08.12	CHK.	정재민	'98.08.13	SEE TABLE	MG621533
CHK.	M	'98.08.13	APP.			PART NAME	
						1806 D/L 1P REC HS'G	