
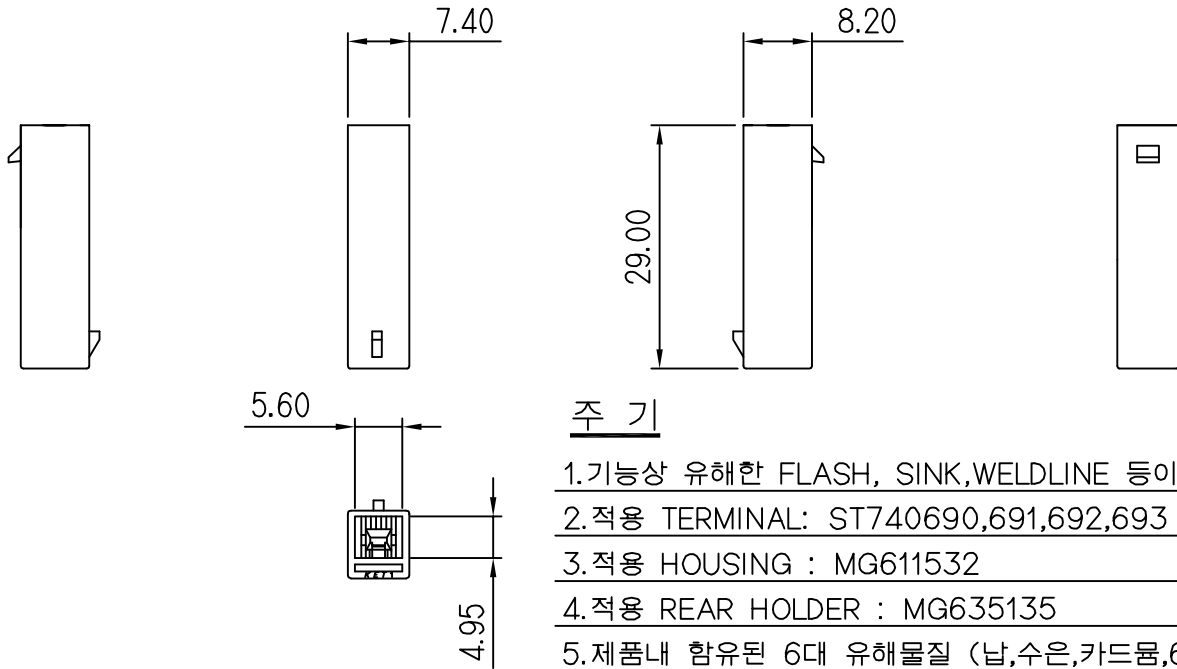


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST740690, 691, 692, 693
3. 적용 HOUSING : MG611532
4. 적용 REAR HOLDER : MG635135
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690, 691, 692, 693
3. APPLICABLE HOUSING : MG611532
4. APPLICABLE REAR HOLDER : MG635135
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL PBT (V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH NATURAL			
					WIRE RANGE			
					CLASS			
⚠	설계사양변경(S110128)근거 도면 재작성			'11.04.28	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG621534
DR. KO '98.08.12		CHK. 		'98.08.18		PART NAME		
CHK. 		'98.08.18		APP.		1806 D/L 1P REC HS'G		