


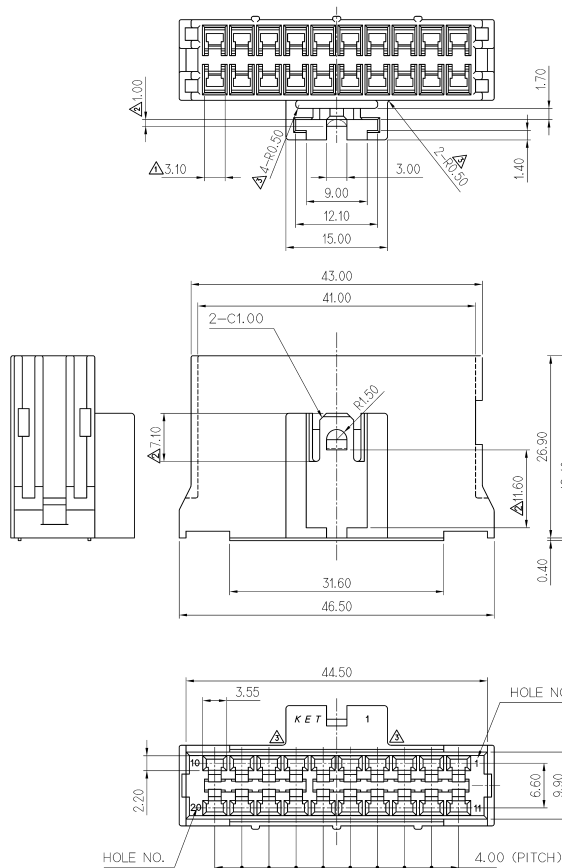

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

* 표시는 현재 사용중인 COLOR임

NOTE

1.MUST BE FREE OF FLASH, SINK AND IMPERFECTION
THAT AFFECT FUNCTION.

2. APPLICABLE TAB. TM'L : ST730675,676,677(090 II)

3. APPLICABLE CLIP : (090 II)

: MG631267(ø7 KEY HOLE, PANEL t:0.7~1.6)

: MG631268(ø7X12 장HOLE. PANEL t:1.7~2.6)

: MG631471(ø7 정HOLE, PANEL t:0.7~1.6).

NOTE

1.기능상 유해한 BURR 및 미성형 등이 없을 것.

2.적용 REC TERMINAL : ST730675,676,677(090Ⅱ)

3. 적용 제품 : 090 II CLIP :

: MG631267(ø7 KEY HOLE, PANEL t:0.7~1.6).

: MG631268(ø7X12 장HOLE. PANEL t:1.7~2.6)

: MG631471(ø7 정HOLE. PANEL t:0.7~1.6)



				MATERIAL SEE TABLE		 KET KOREA ELECTRIC  ENGINEERED TERMINAL CO., LTD.	
				FINISH SEE TABLE			
 설계/제작/시험(060193)에 의한 해석		TSW		06.07.12			
 시험/제작/시험(030018)에 의한 CLTPW 수중		CW		103.02.10		CLASS	
 고압시험에 의한 수중수압		CCW		100.06.15		TYPE .090 II	
LTR		REVISION RECORD		DR CHK APP DATE		SCALE 2/1 PART NO. MG621818	
DR MAN '99.01.14.		CHK		3/3		PART NAME 090 II JOINT 20F HOUSING APP 060193 3/3	