



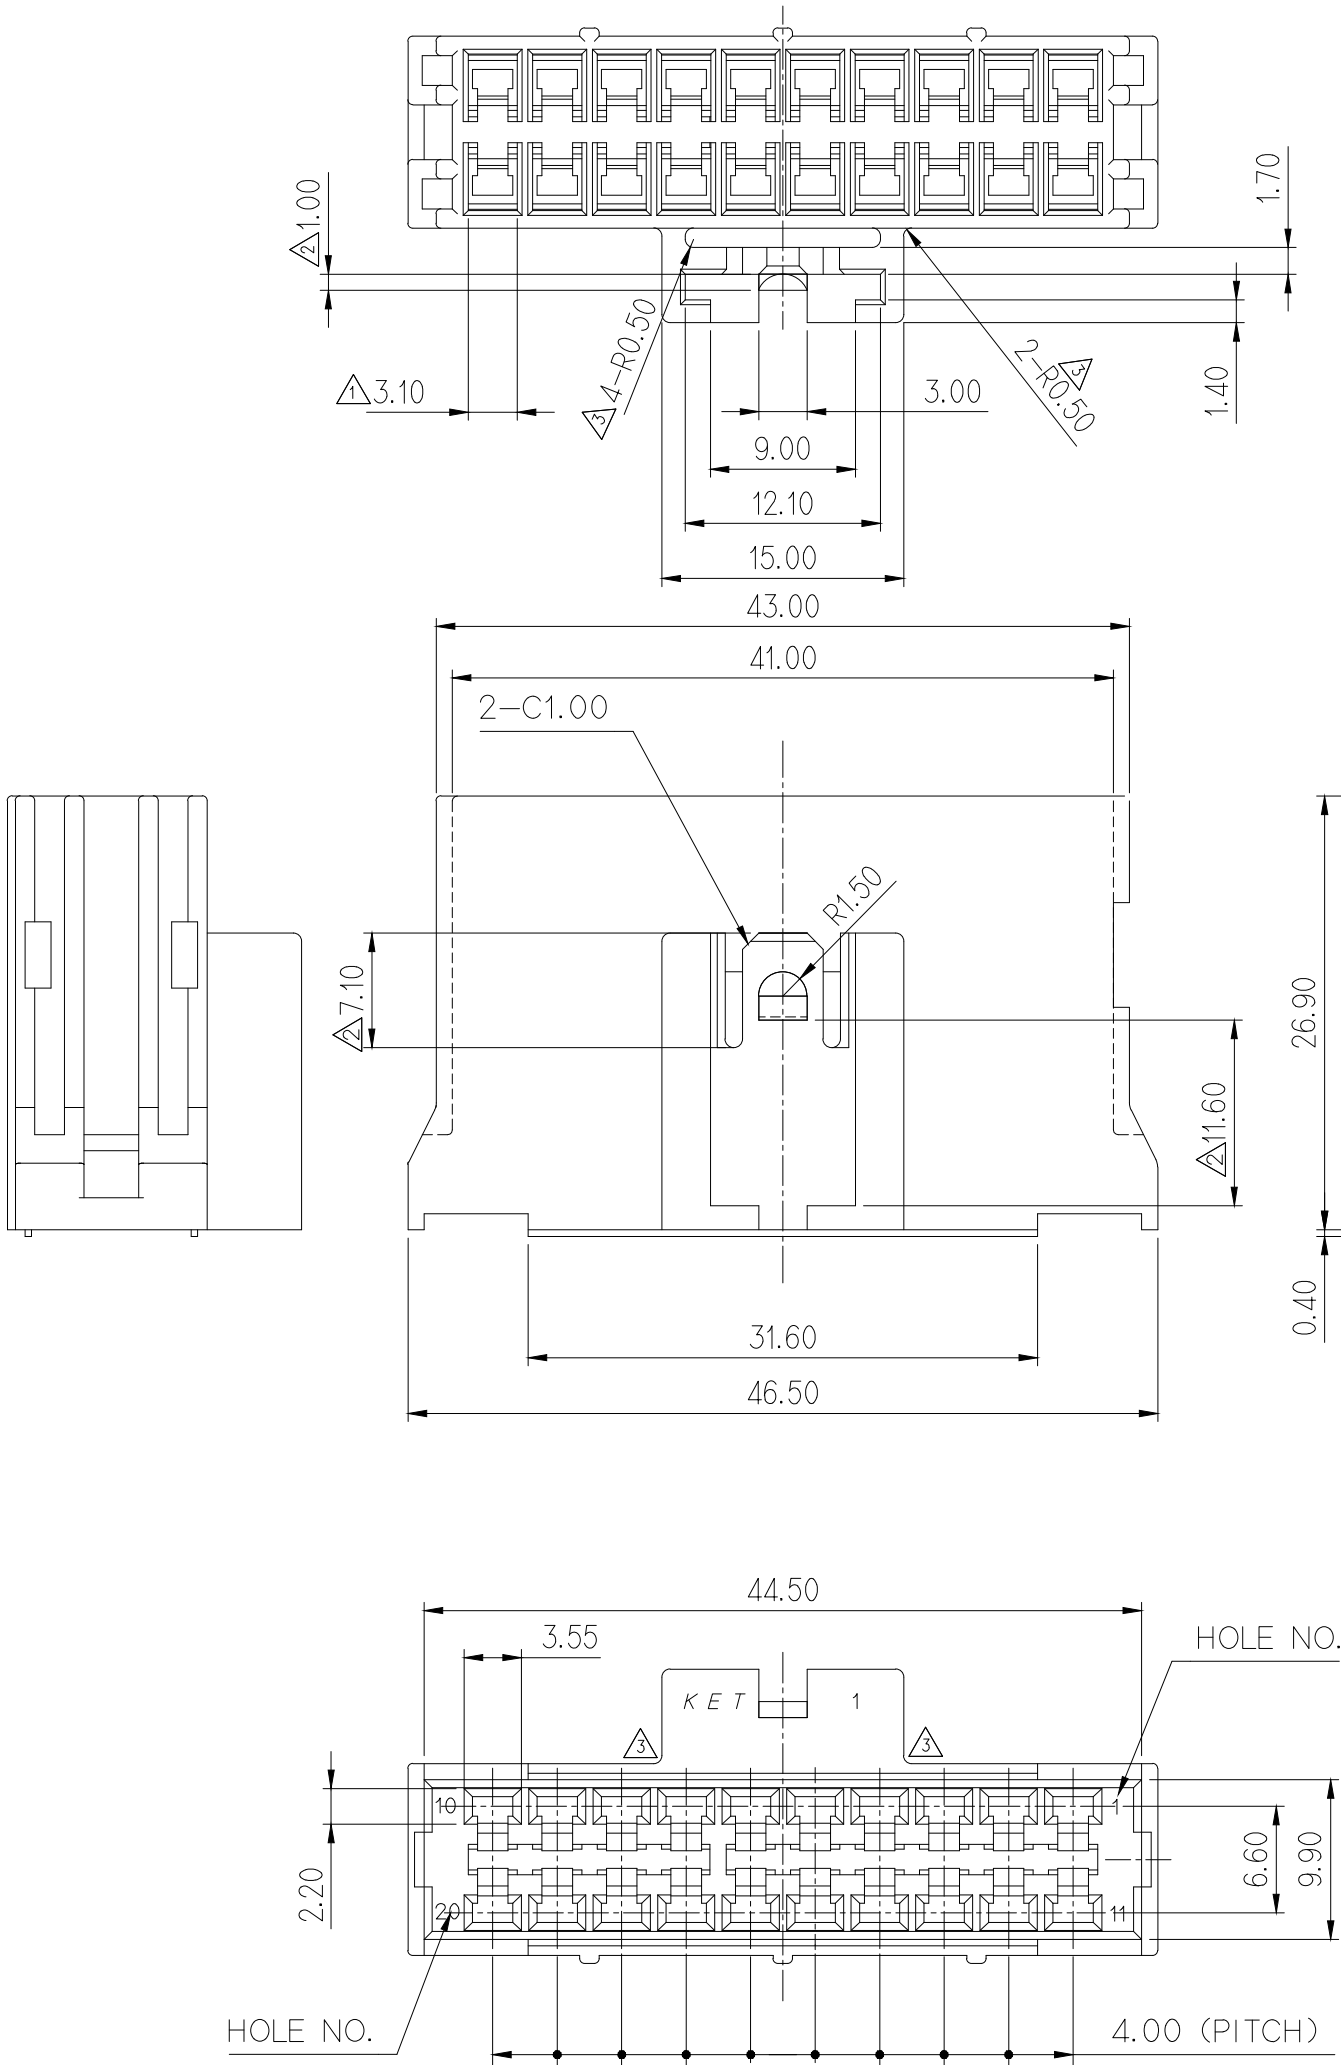


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION
2. APPLICABLE TAB TM'L : ST730675,676,677(090Ⅱ)
: MG631267(ø7 KEY HOLE, PANEL t:0.7~1.6).
: MG631268(ø7X12 장HOLE, PANEL t:1.7~2.6).
: MG631471(ø7 정HOLE, PANEL t:0.7~1.6).
3. APPLICABLE CLIP : (090Ⅱ)
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

NO.	METERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

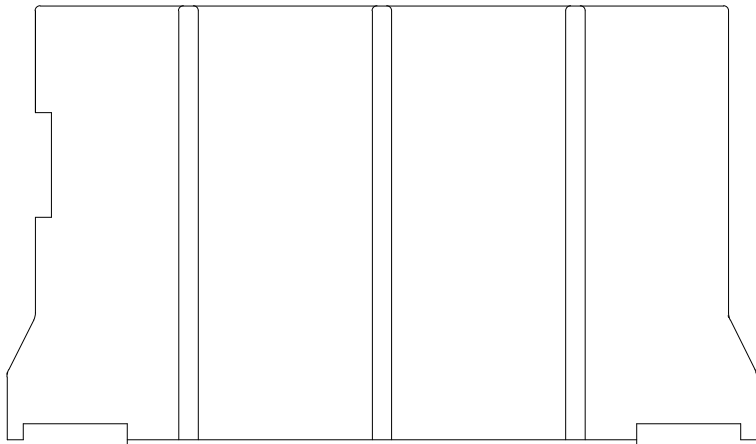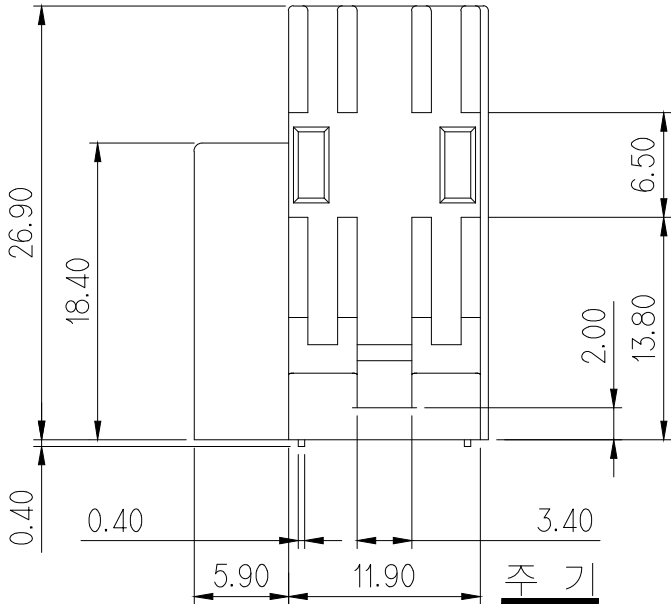

1. 기능상 유해한 BURR 및 미성형 등이 없을 것.
2. 적용 REC TERMINAL : ST730675,676,677(090Ⅱ)
3. 적용 제품 : 090Ⅱ CLIP :
: MG631267(ø7 KEY HOLE, PANEL t:0.7~1.6).
: MG631268(ø7X12 장HOLE, PANEL t:1.7~2.6).
: MG631471(ø7 정HOLE, PANEL t:0.7~1.6).
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
③	설계시양변경(060193)근거 도면 재작성	YSW	HSH	KKJ	06.07.12	WIRE RANGE		CLASS
②	시방변경서(030018)의거 CLIP부 수정	CCW	WK	JJH	'03.02.10	INSULATION		TYPE .090 II
①	고객요청에 의한 치수추가	WK	KKJ	JJH	'00.06.15.			PART NO. MG621818
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	
DR. MAN. '99.01.14.		CHK. KKJ		3/3		PART NAME 090 II JOINT 20F HOUSING		
CHK.		APP. CHOSH		3/3				

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK