



MG621858

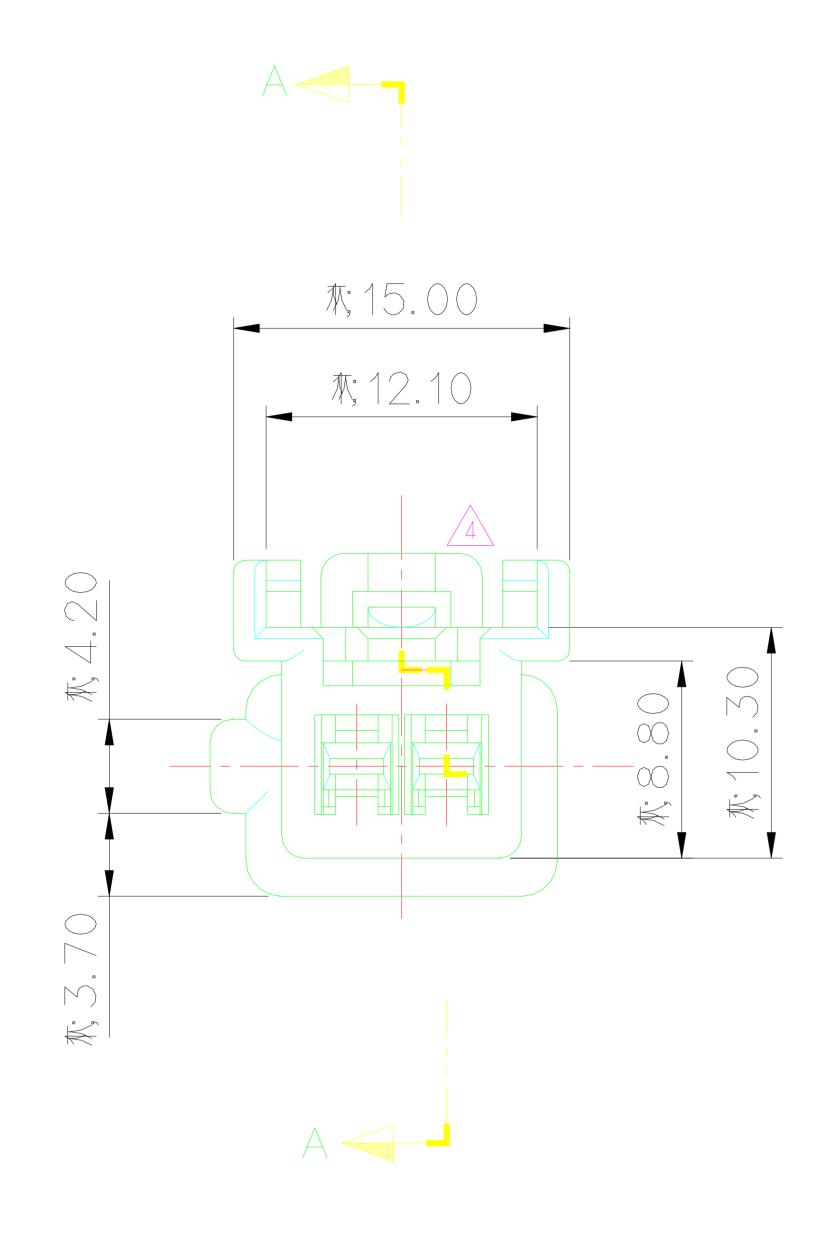

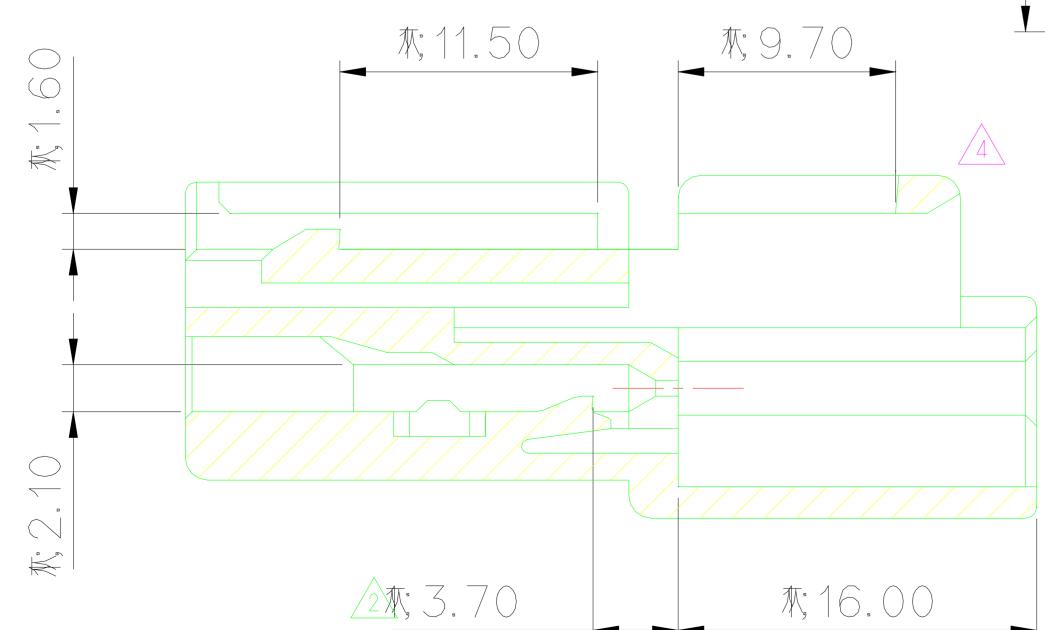

SECTION A-A

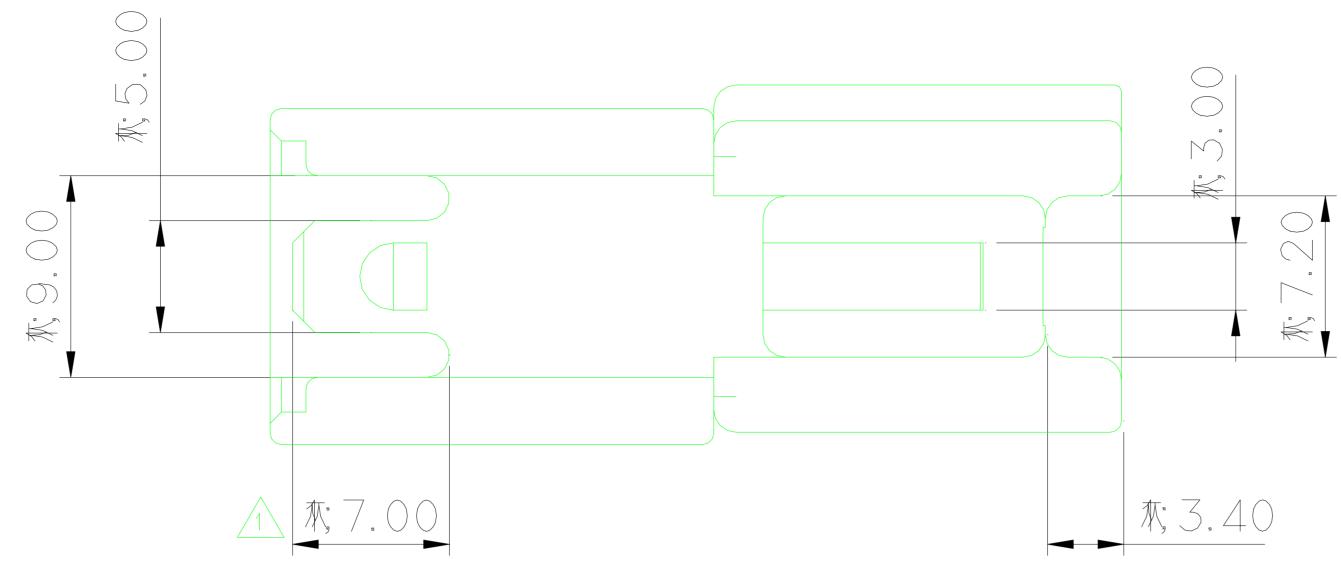

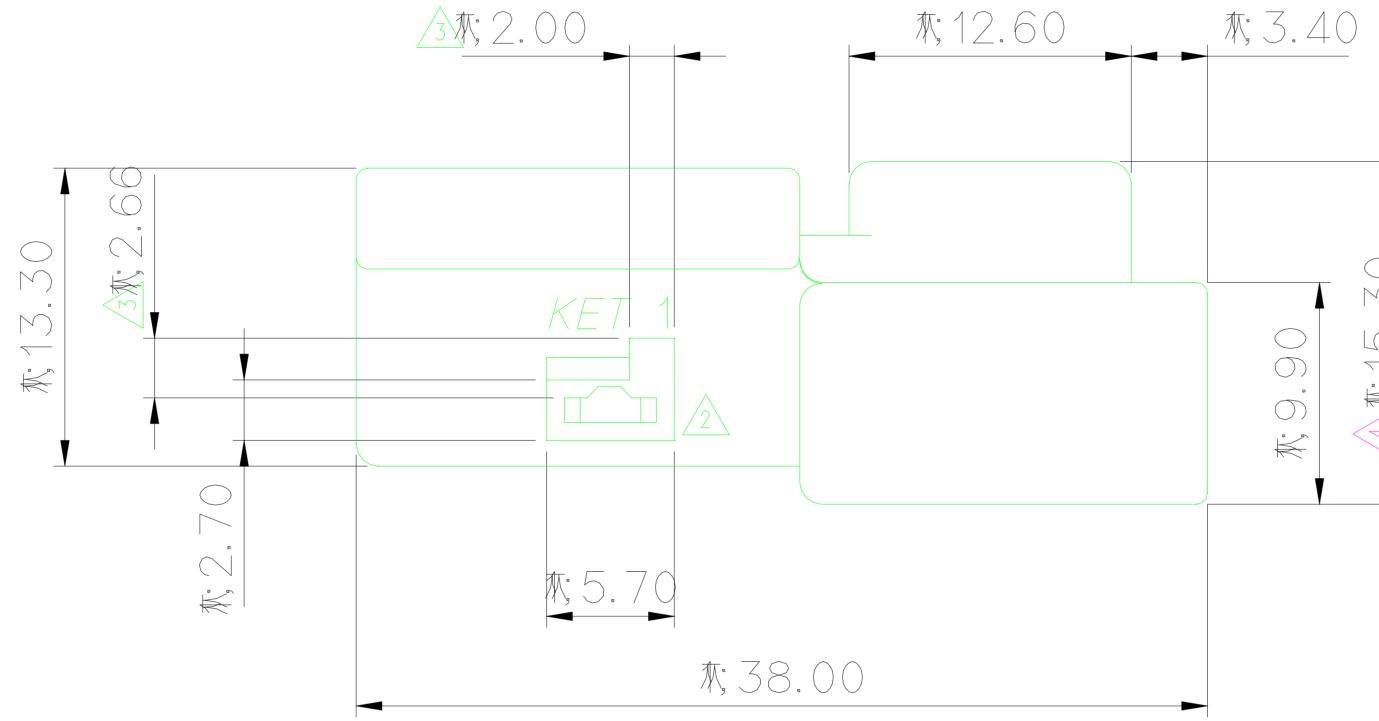






GENERAL TOLERANCE (HOUSING)						
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95		±30°	

NOTE

1. MUST BE FREE OF BURR, WELDLIN AND IMPERFECTION THAT AFFECT FUNCTION. 2. APPLICABLE TERMINAL :ST740672, 673, 674 APPLICABLE HOUSING :MG651026, MG611857 APPLICABLE SPACER :MG631859 APPLICABLE CLIP: MG631267, 631268, 631471, 632019

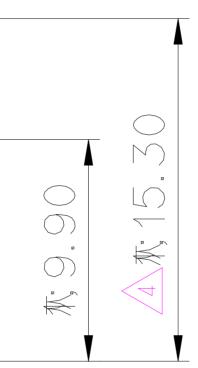

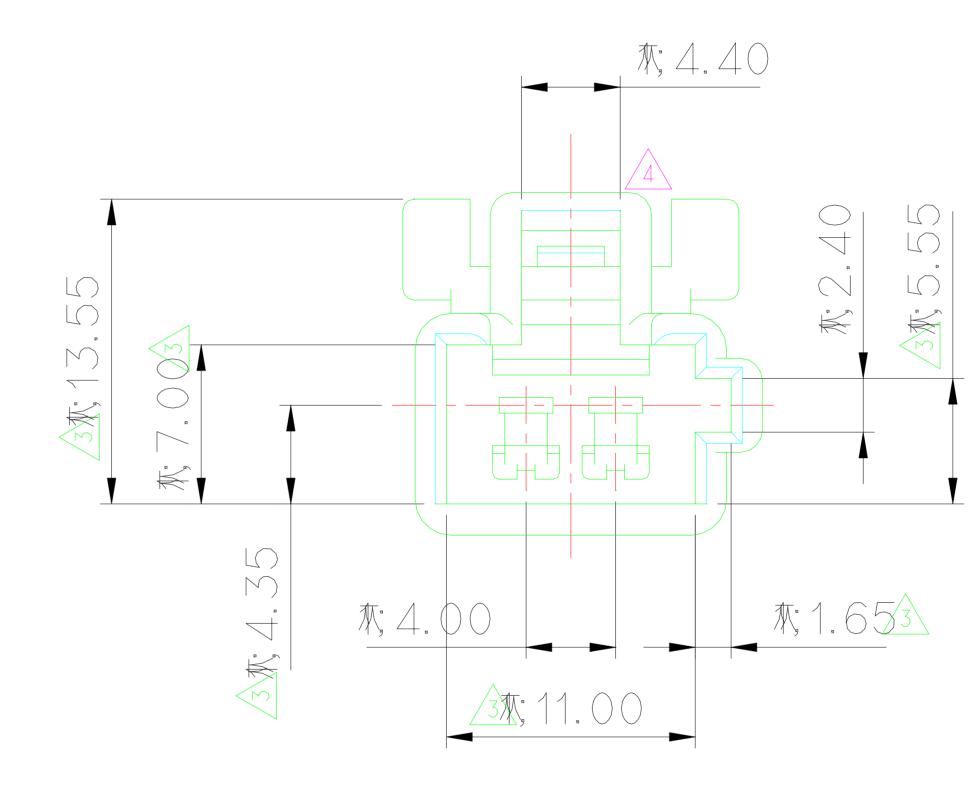



주기
1.기능상 유해한 BURR 및 WELDLINE등이 없
2.적용 TERMINAL: ST740672, 673, 674
적용 HOUSING: MG651026, MG611857
적용 SPACER: MG631859
적용 CLIP: MG631267, 631268, 63147

					MATERIAL	SE
4	ECO-1211-059에 근거 도면 재작성	YM.K CSH	HSH	'12.11.12	FINISH	NA
3	시방변경(020133)의거 도면 변경	LSY		'02.9.18		1 N 7 N
	시방변경(020053)의거 도면 변경	LSY	M	'02.5.8	WIRE RANGE	-
	시방변경(010166)의거 도면 변경	LSY		'01.09.18	INSULATION	
LTR	REVISION RECORD	DR. CHK	APP.	DATE	TOLERANCE EXCEPT	TABLE
DR.	WON, 00,08,21	CHK.	m	8/22	PART NAME	
CHK.		APP.	10M	8/22		ASC.

USED ON

$\left \right\rangle$	

어 은 거.			
4			
/			
171, 6320	19		
	ISSUE MARK		
EE TABLE	KOREA ELECTRIC		
ATURAL	<i>Engineered</i> Terminal Co., L		
	CLASS .090		
	TYPE		
scale 2/1	part no. MG621858		
C 02M H(JUSING		