

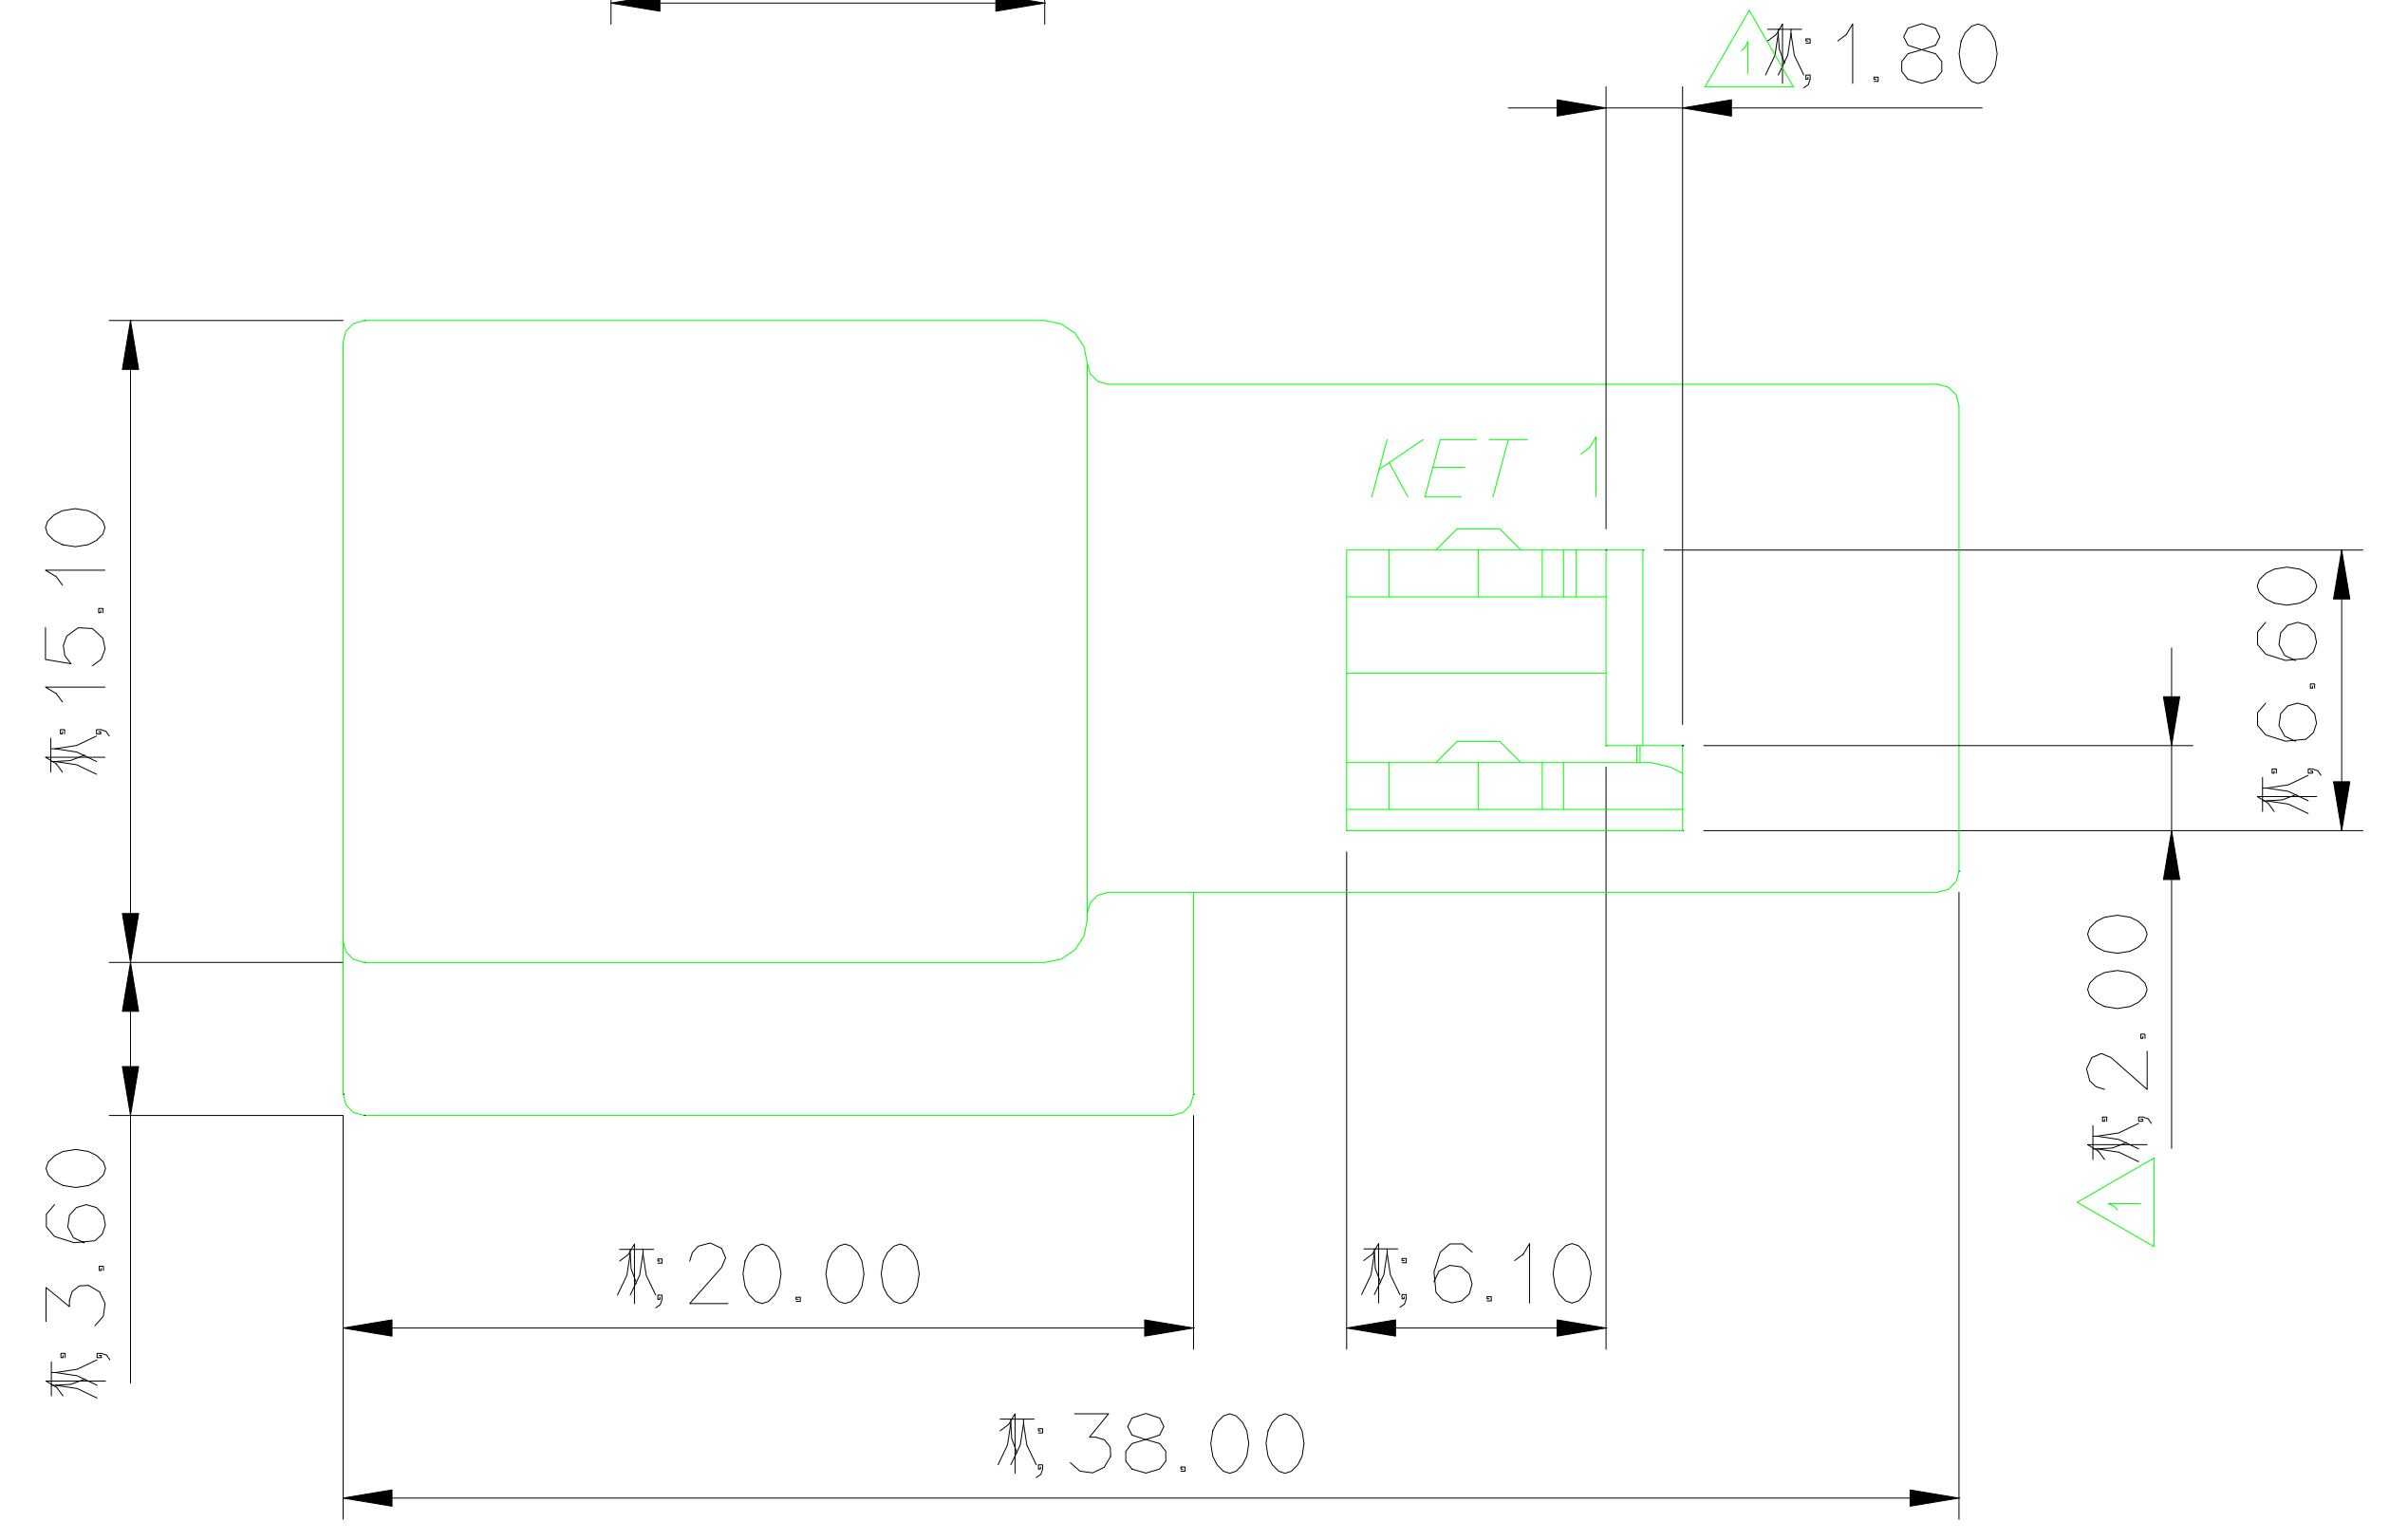
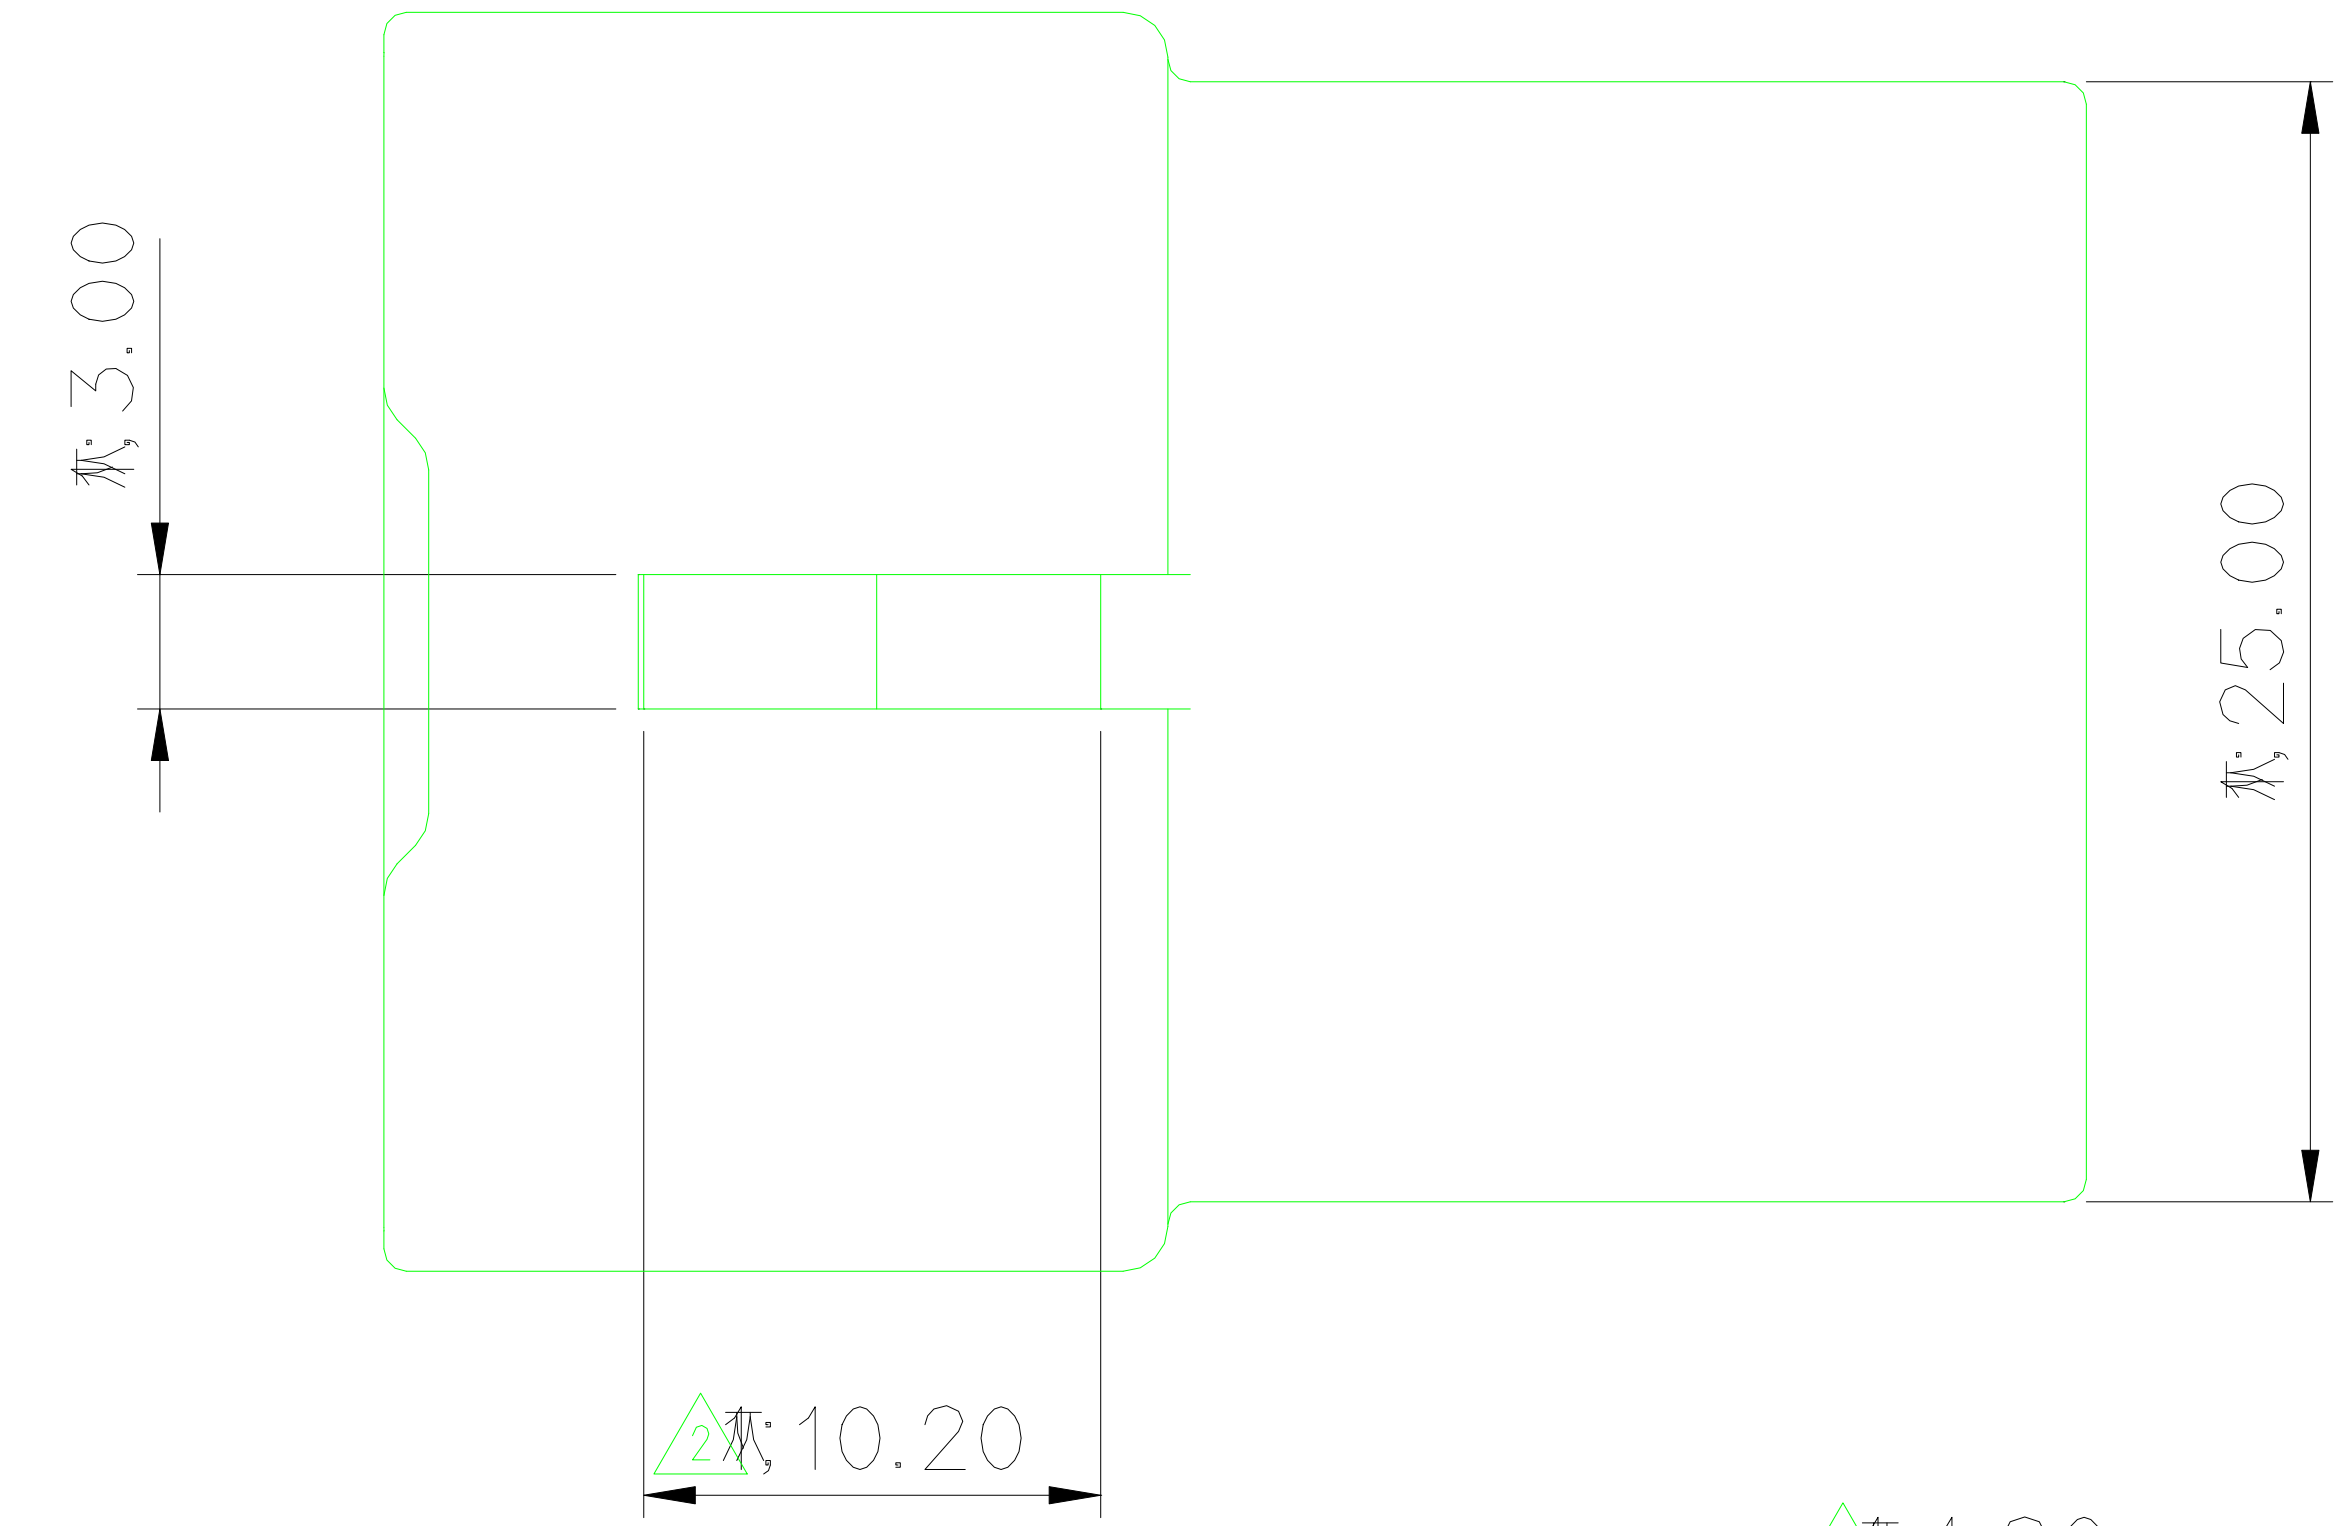
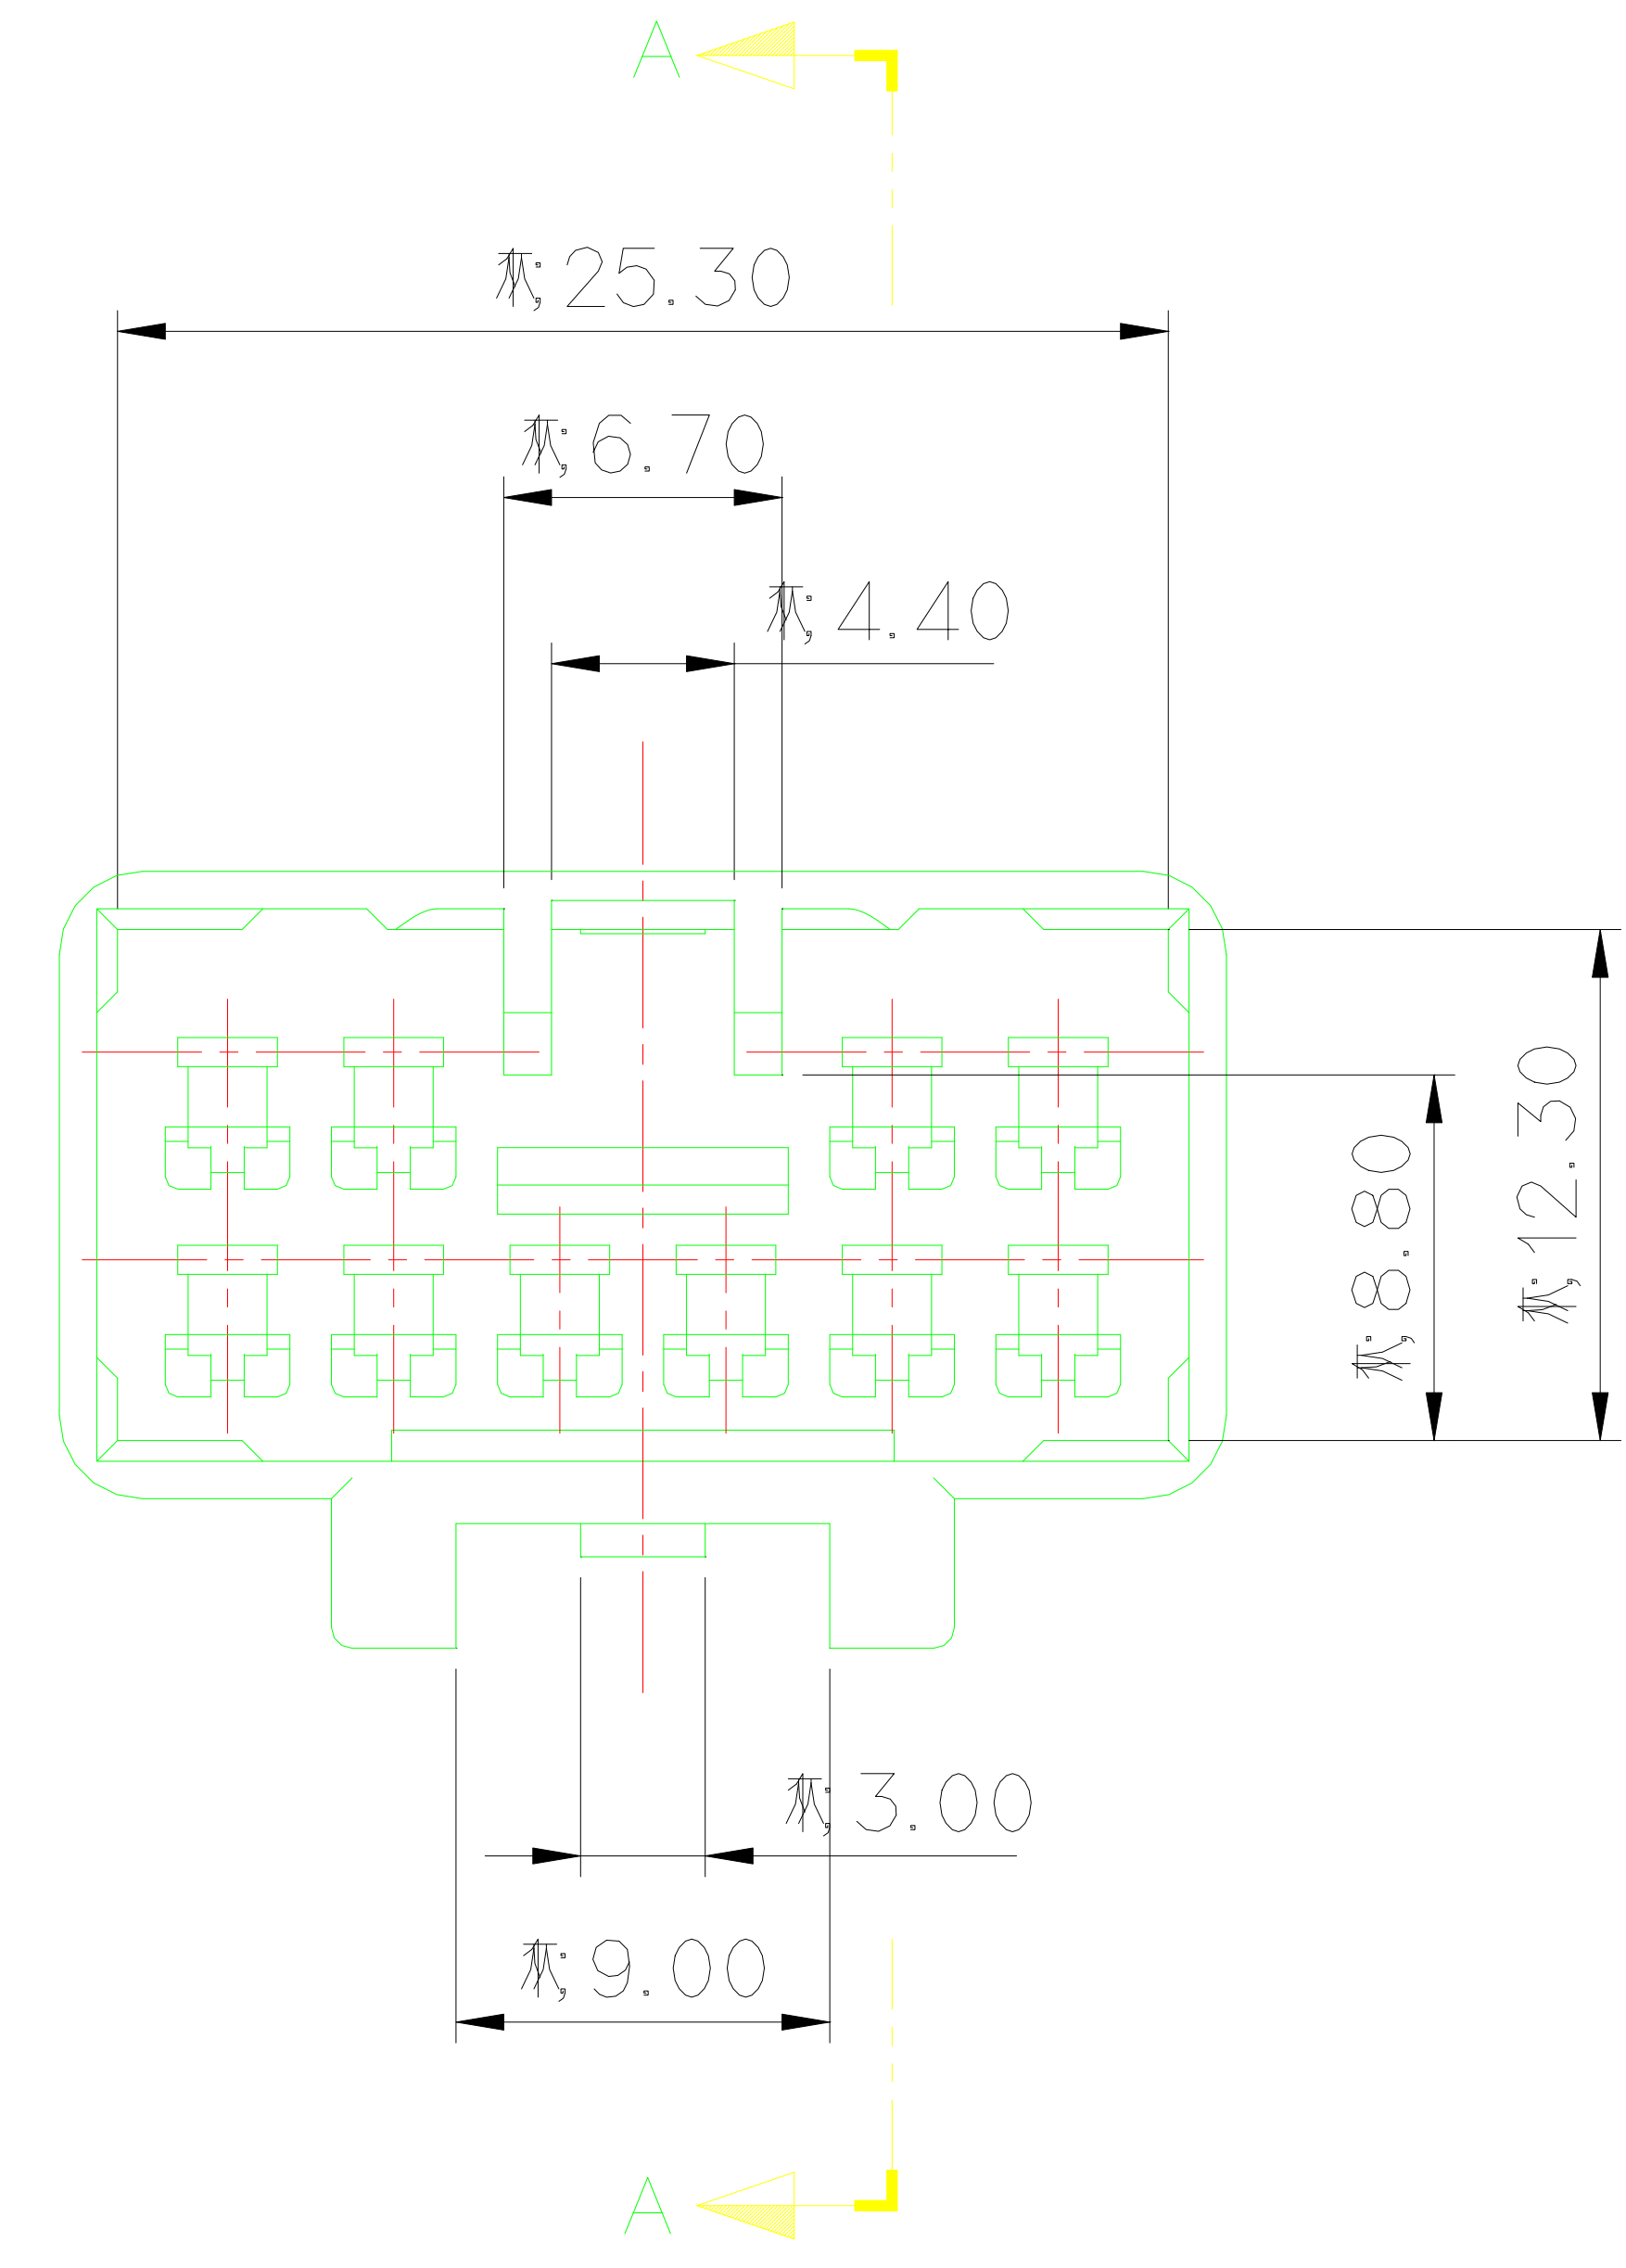
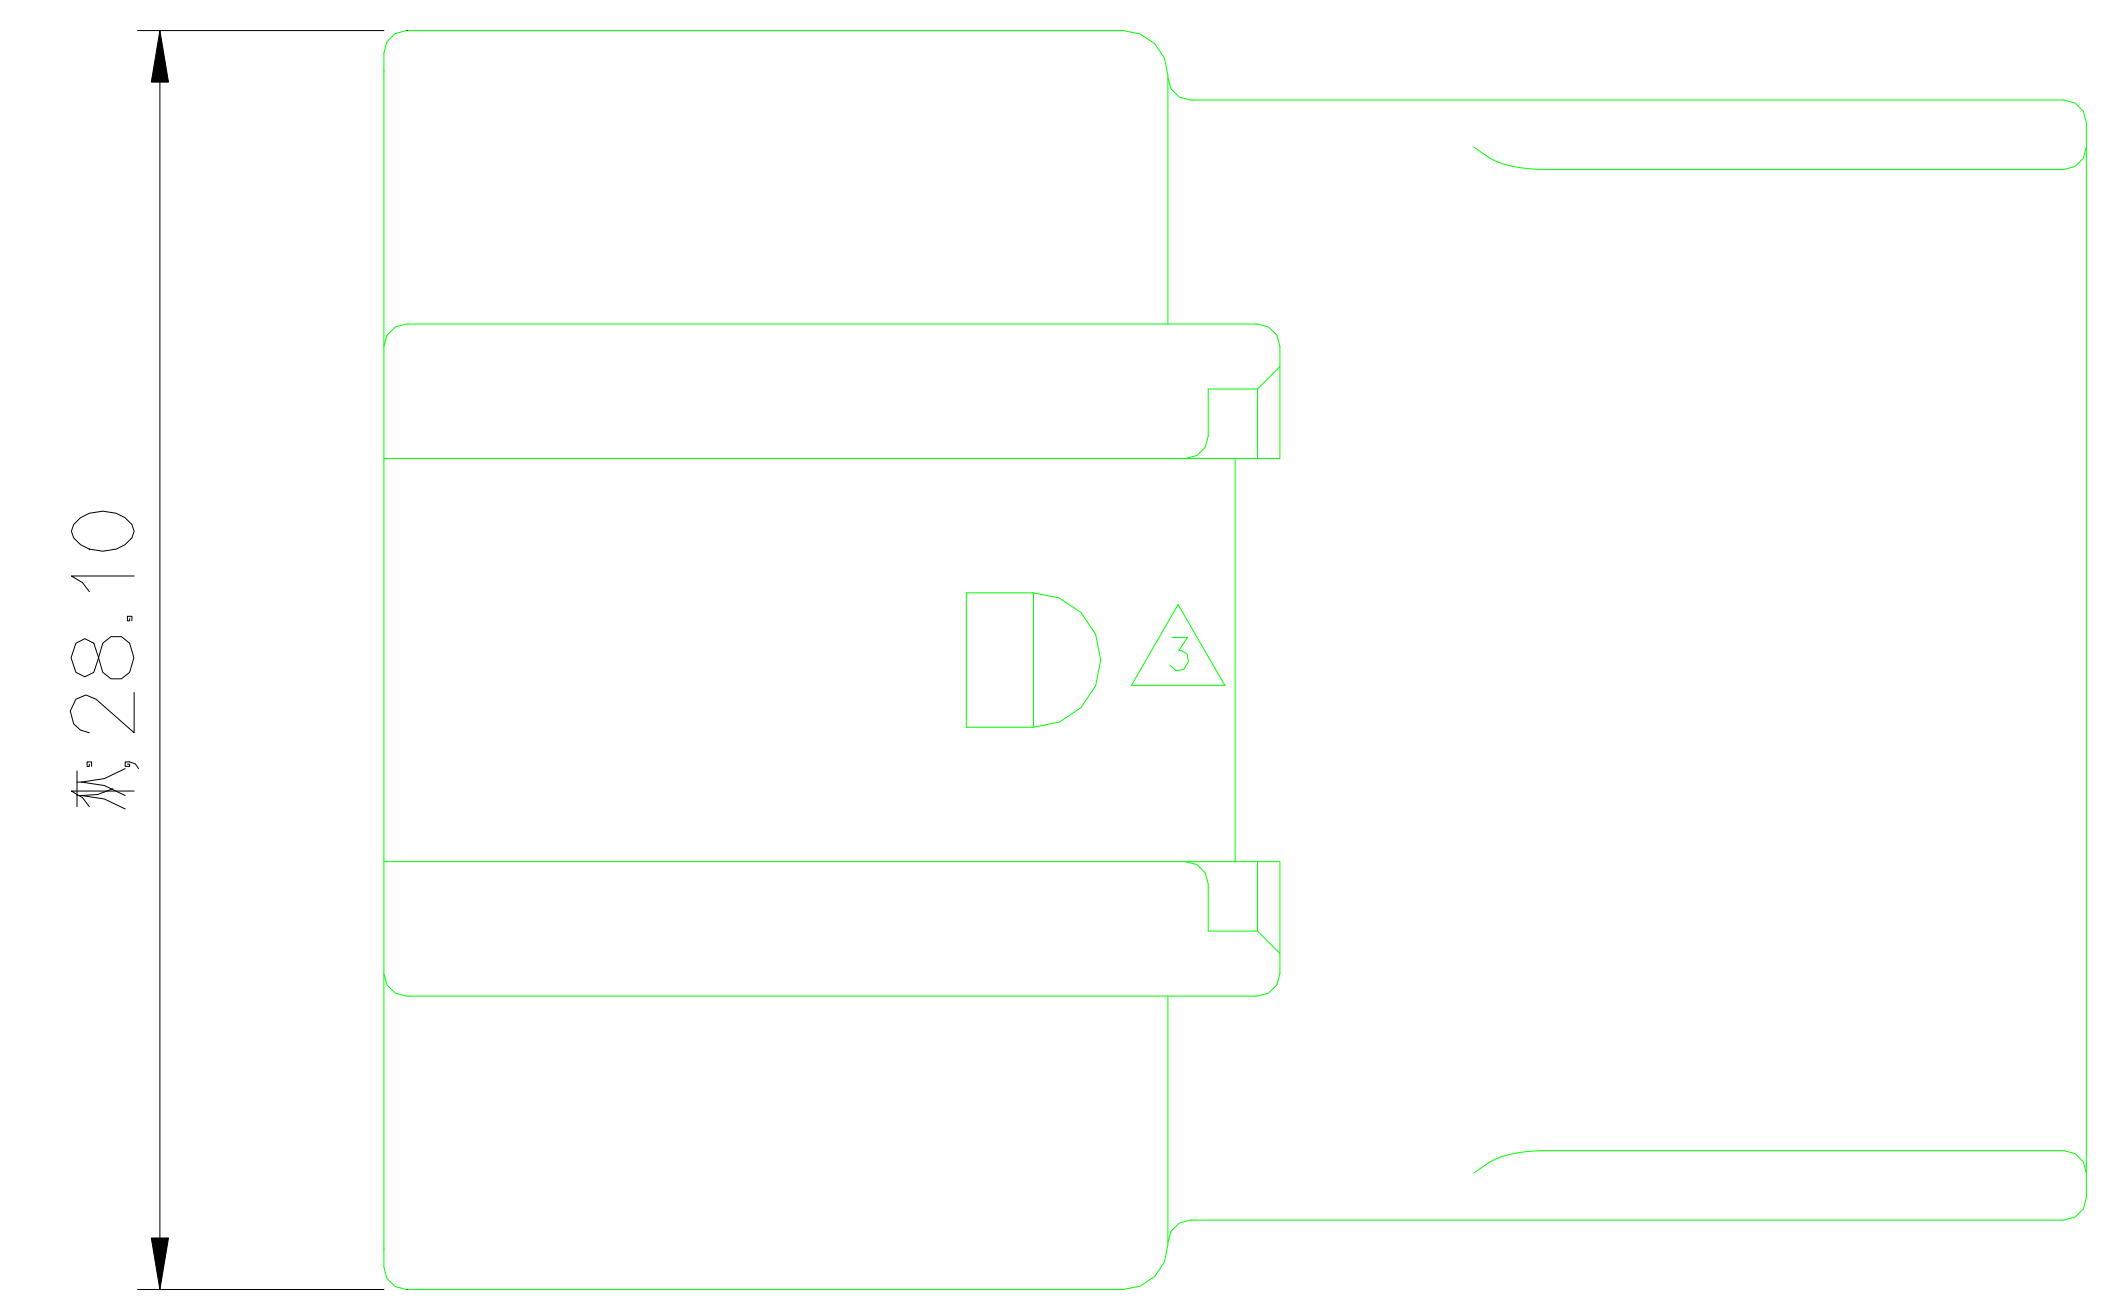


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

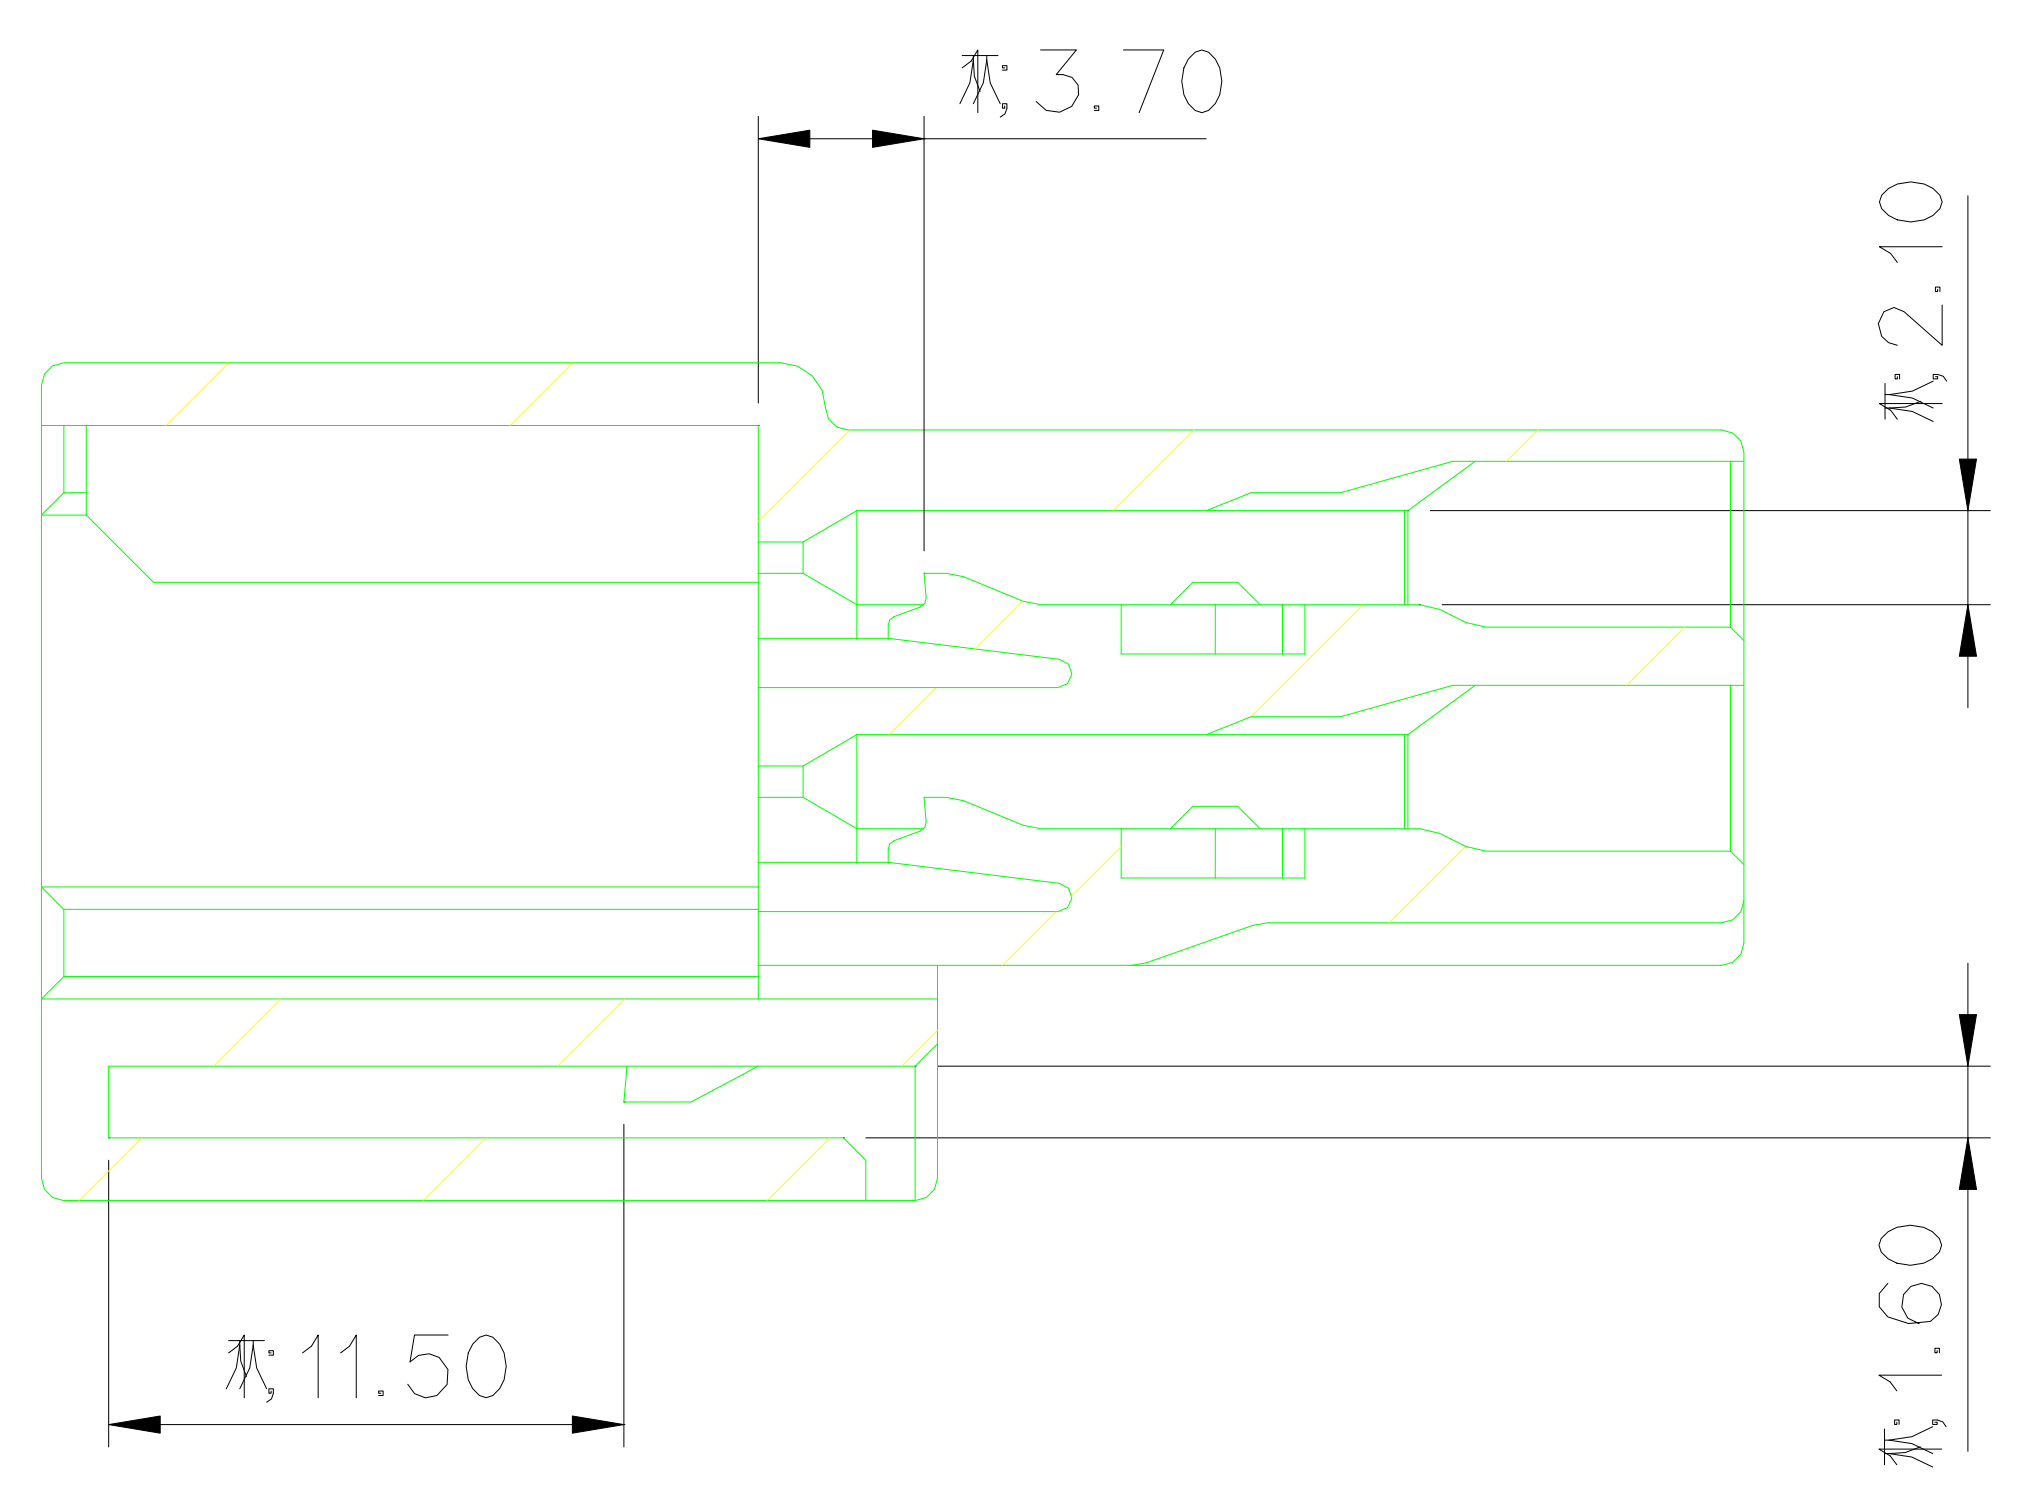


NOTE

- MUST BE FREE OF BURR, WEIDLIN AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST740672, 673, 674
 APPLICABLE HOUSING: MG612234, MG651056
 APPLICABLE SPACER: MG632236
 APPLICABLE CLIP: MG631267, 631268, 631471, 632019

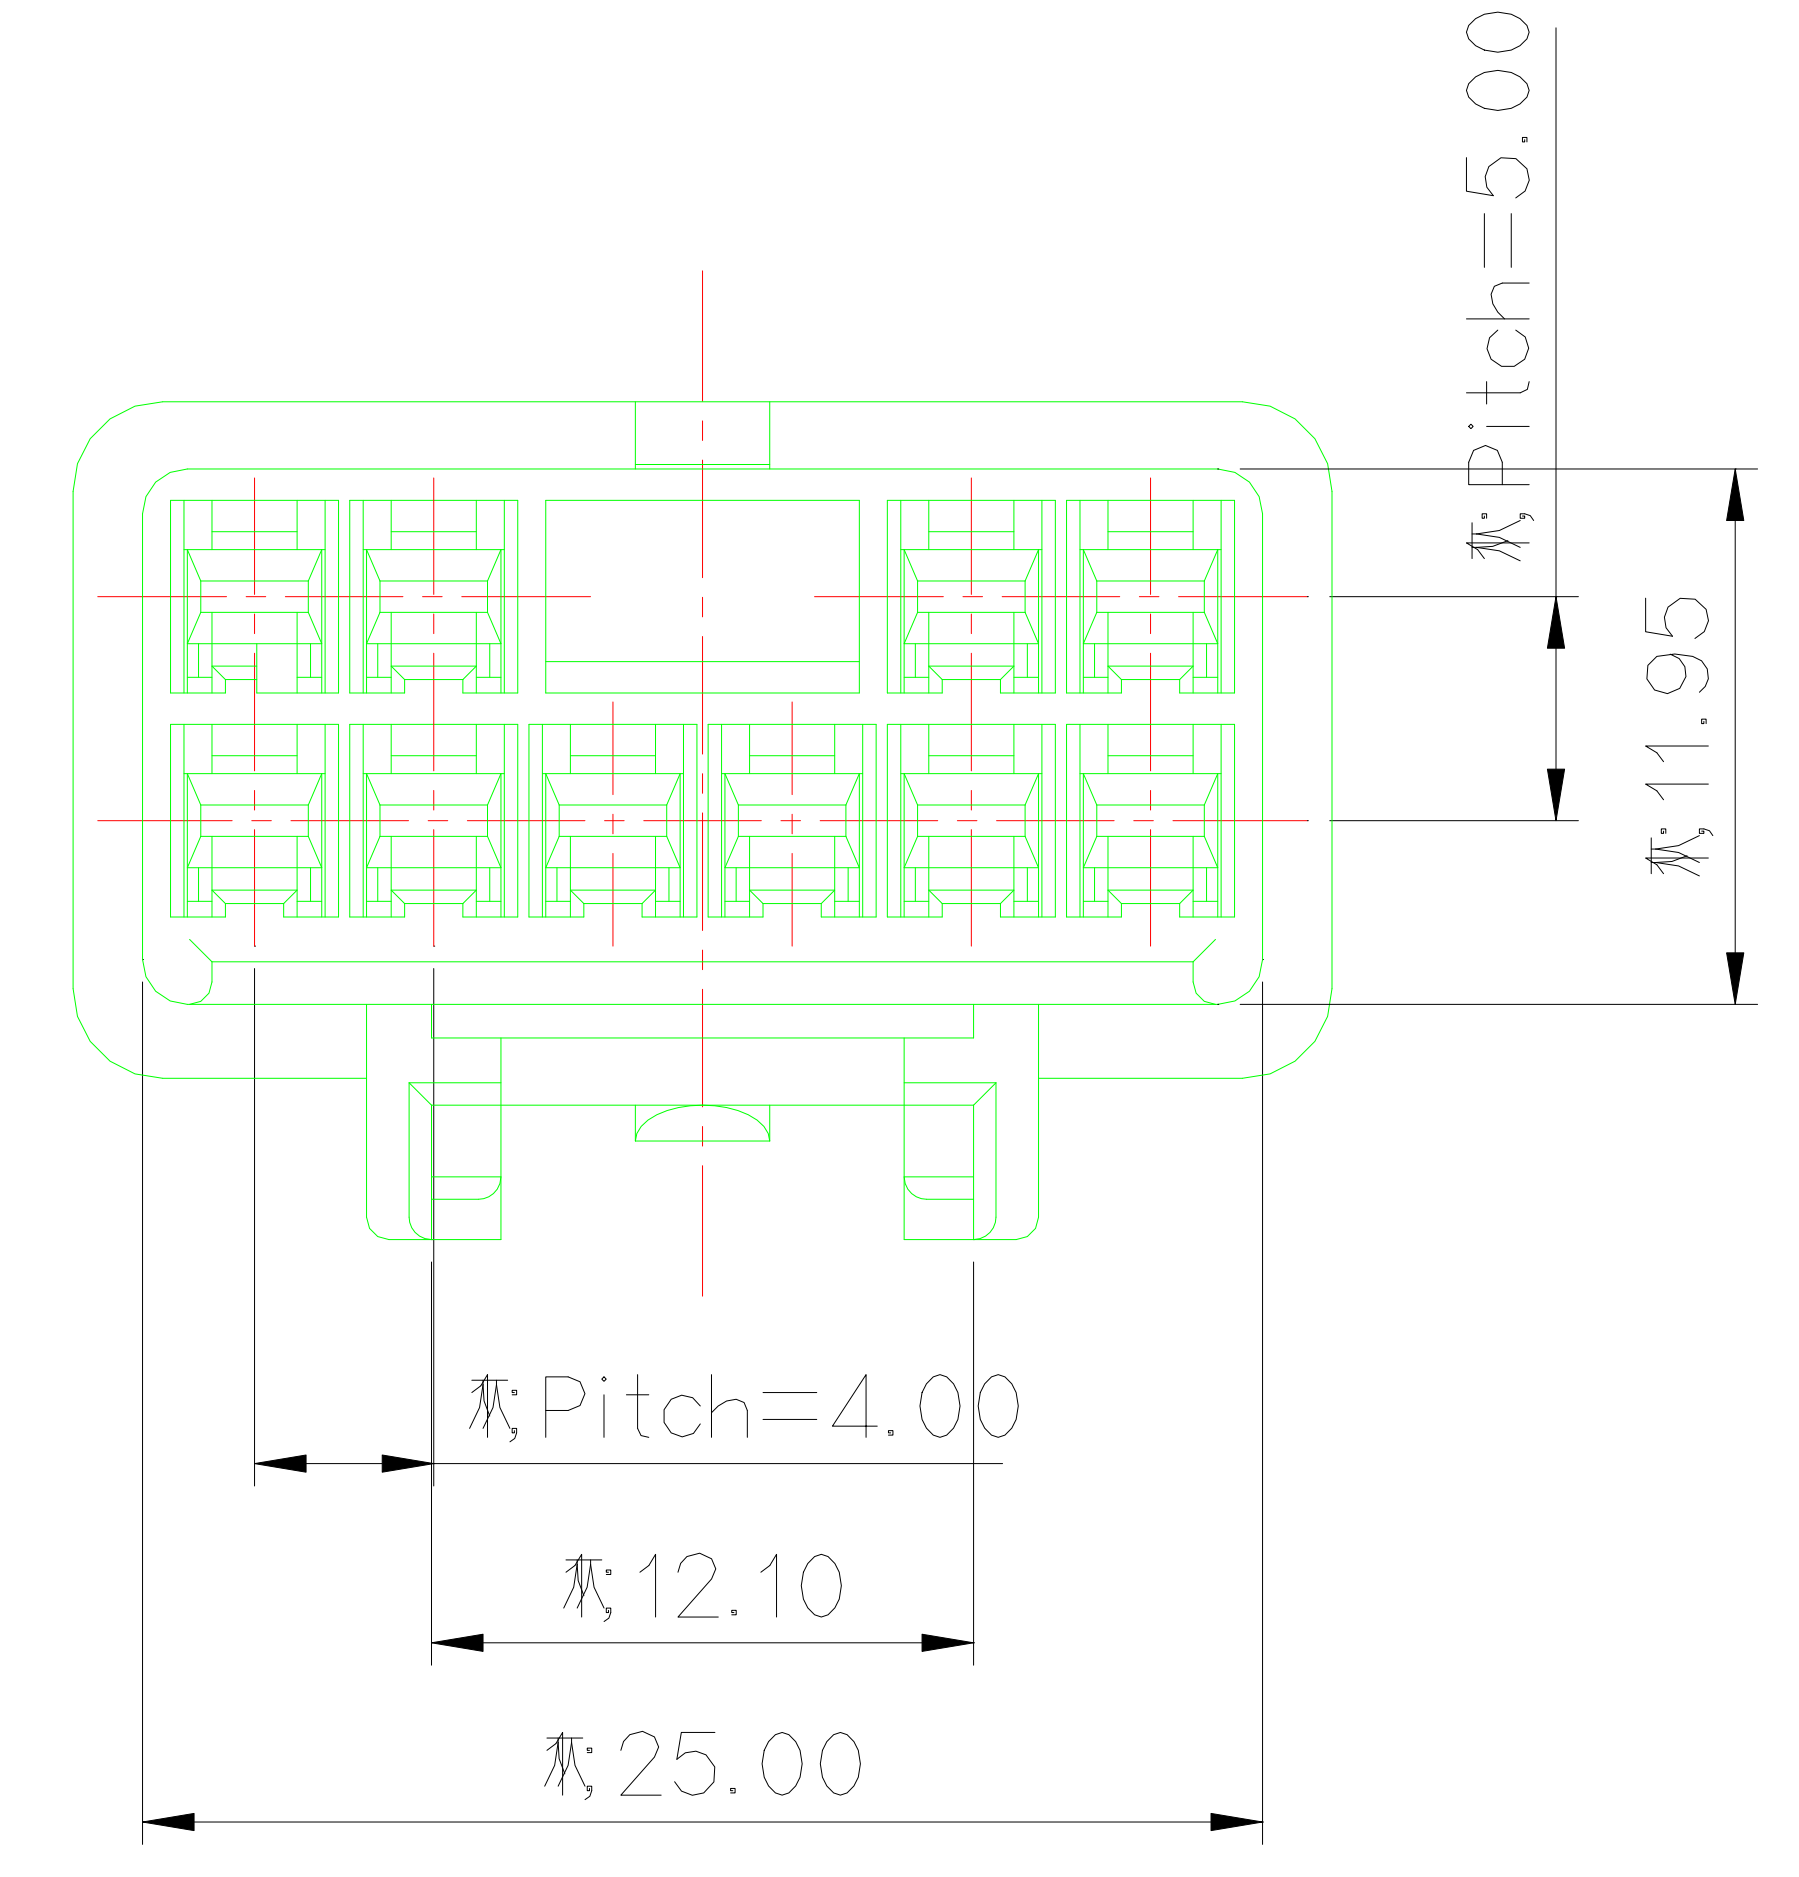

주 기

- 기능상 유해한 BURR 및 WELDLIN 등이 없을것.
- 적용 TERMINAL: ST740672, 673, 674
 적용 HOUSING: MG612234, MG651056
 적용 SPACER: MG632236
 적용 CLIP: MG631267, 631268, 631471, 632019



ISSUE MARK

ECO-1209-120 근거 도면변경		YM.K	CSH	HSH	'12.09.21	MATERIAL	PBT	KOREA ELECTRIC TERMINAL CO., LTD.
ECO-1207-521 근거 도면변경		CKY	CSH	HSH	'12.07.24	FINISH	NATURAL	
SPACER 오조립 방지		?	KKJ	J2	'12.05.29	WIRE RANGE		CLASS .090
REVISION RECORD		DR.	CHK.	APP.	DATE	INSULATION		TYPE
DR.	WON. 2001.8.22	CHK.	KKJ		8/23	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
CHK.		APP.	JWK		8/23	PART NAME	ASC 10M HOUSING	
								PART NO. MG622235

SECTION A-A