



SECTION A-A

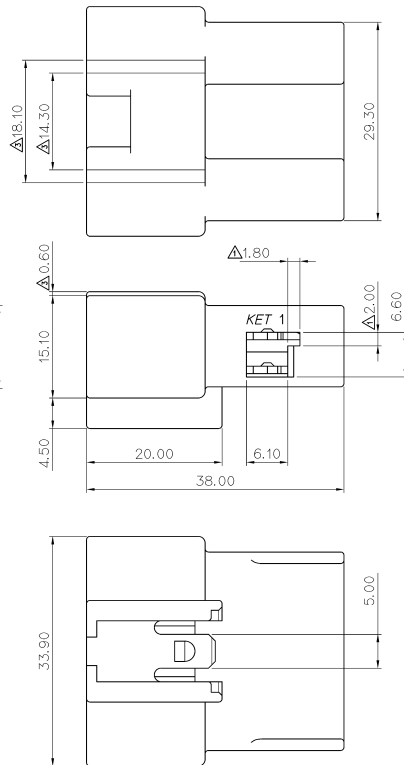

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WEIDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST740672, 673, 674  
APPLICABLE HOUSING: MG612237, MG651350  
APPLICABLE SPACER: MG632239  
APPLICABLE CLIP: MG631267, 631268, 631471, 632019



주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST740672, 673, 674  
적용 HOUSING: MG612237, MG651350  
적용 SPACER: MG632239  
적용 CLIP: MG631267, 631268, 631471, 632019



ISSUE MARK

		MATERIAL PBT		KOREA ELECTRIC TERMINAL CO., LTD.		
		FINISH NATURAL				
LOCK 방호 보강 CLIPW 포함 유극축 및 SPACER 포함 표시		DATE 02.12.16 DATE 02.12.10 DATE 02.06.05		CLASS .090 TYPE		
LTR REVISION RECORD		DR	CHK	APP	DATE	INSULATION SEE TABLE SCALE 2/1 PART NO. MG622238
DR. WON. 2001.8.22		CHK		APP	8/23	PART NAME
CHK.		APP. CHOSHI		8/23		ASC 11M HOUSING