



주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST740672, 673, 674  
적용 HOUSING: MG612240, MG651110  
적용 SPACER: MG632242  
적용 CLIP: MG631267, 631268, 631471, 632019
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

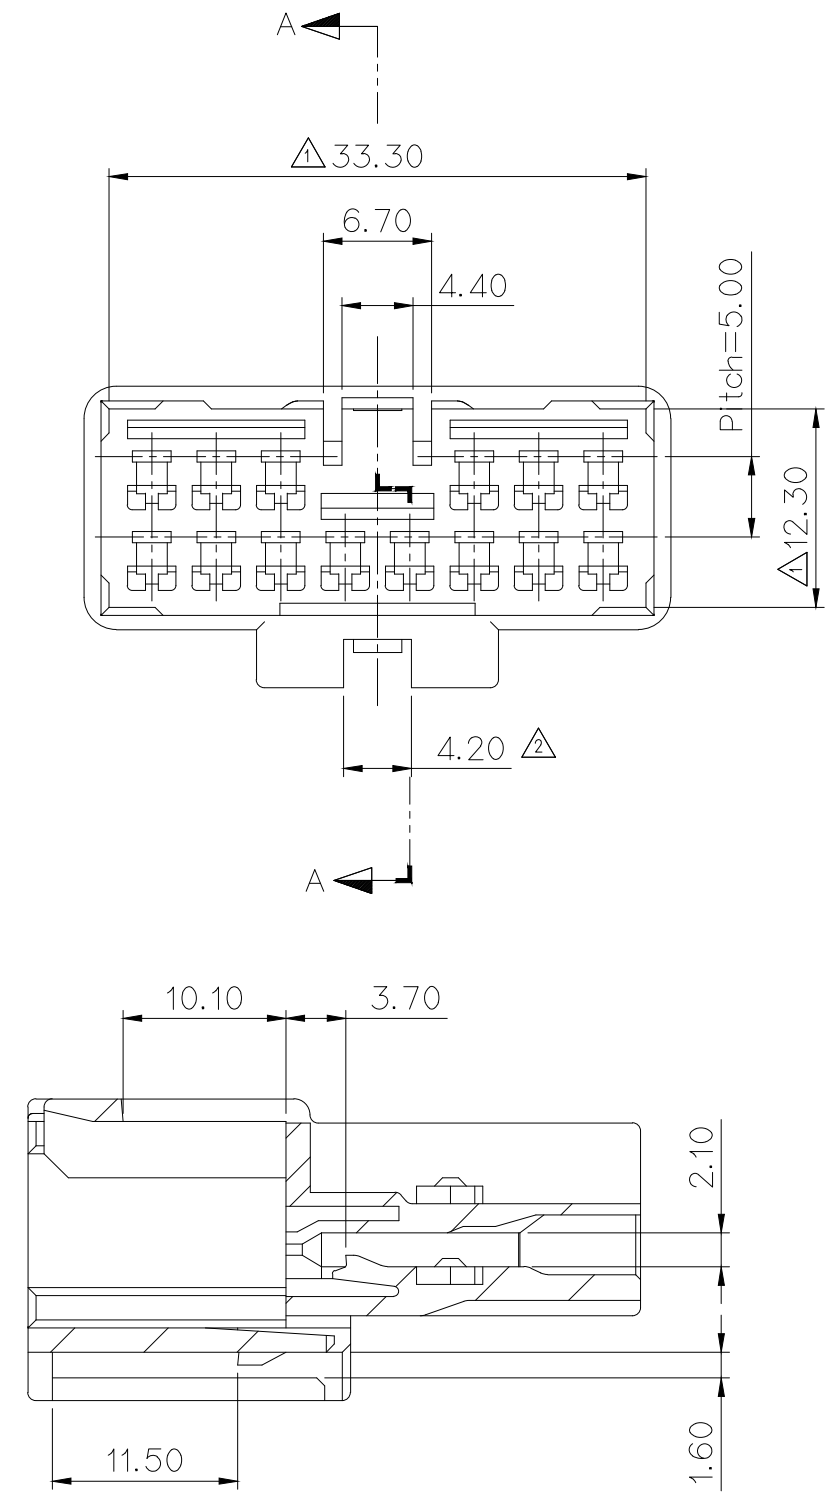


SECTION A-A

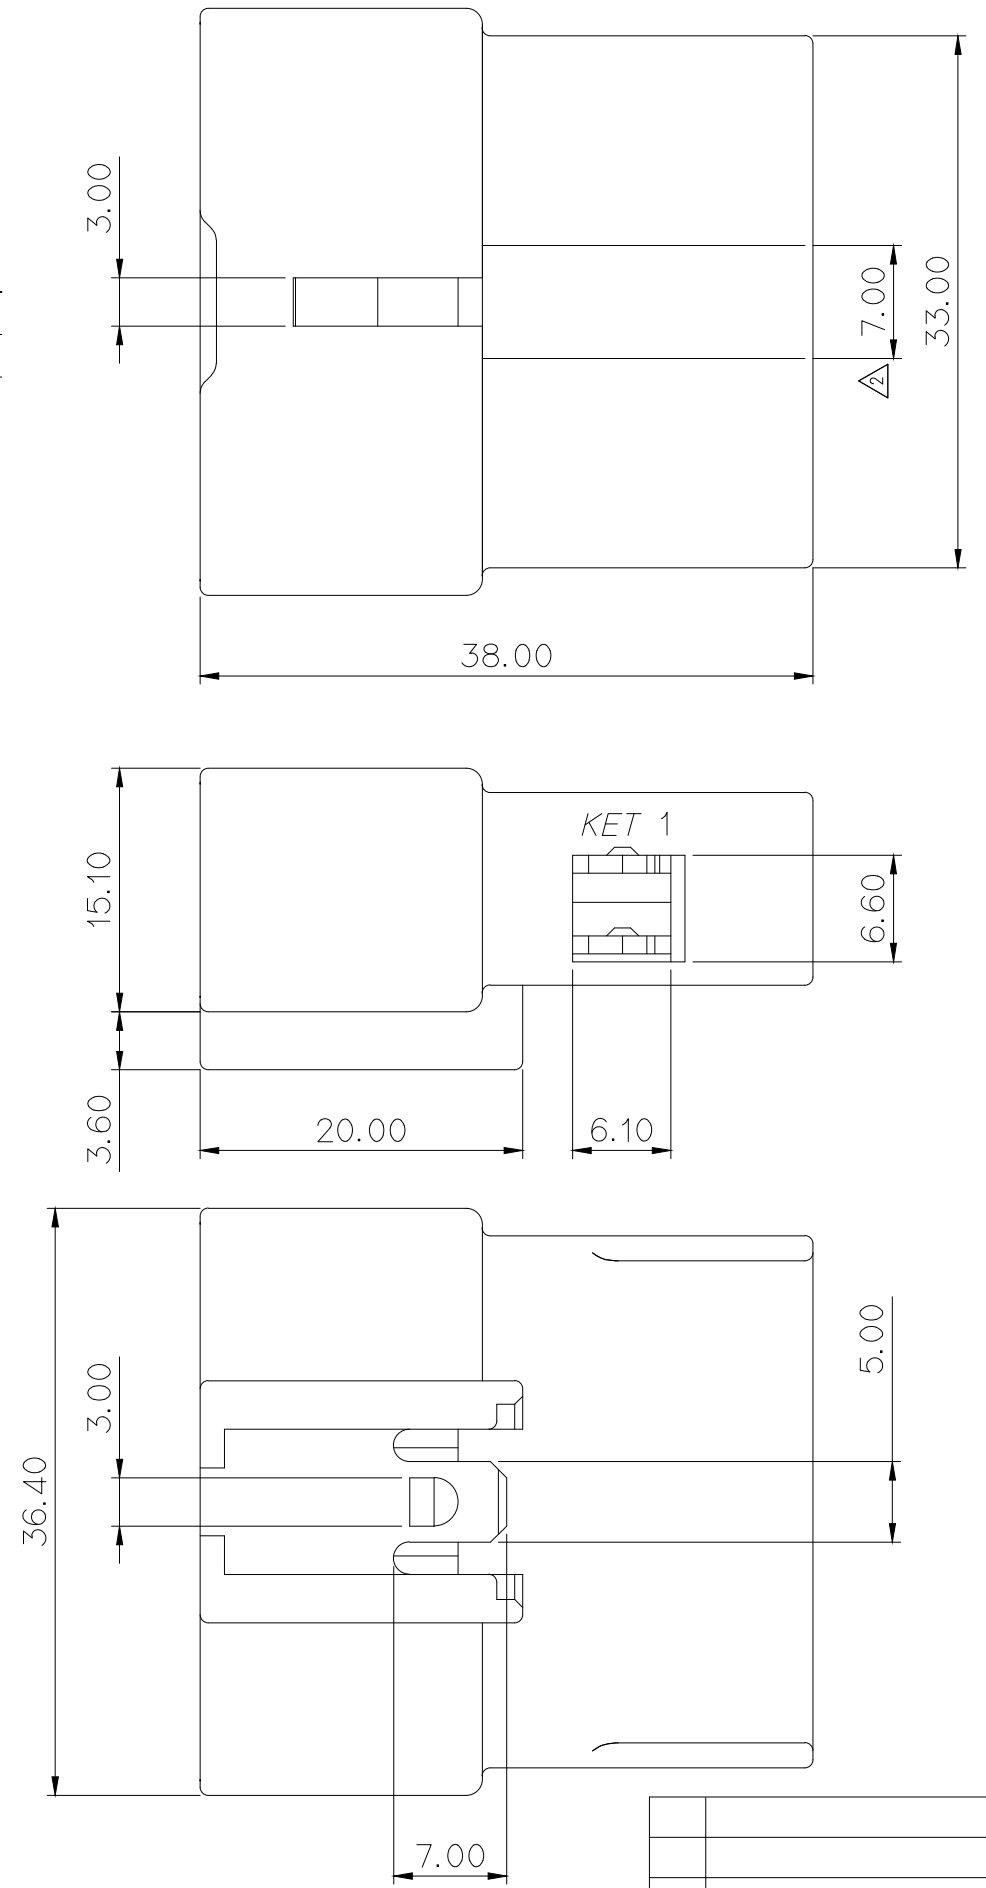

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, WEIDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL: ST740672, 673, 674  
APPLICABLE HOUSING: MG612240, MG651110  
APPLICABLE SPACER: MG632242  
APPLICABLE CLIP: MG631267, 631268, 631471, 632019
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

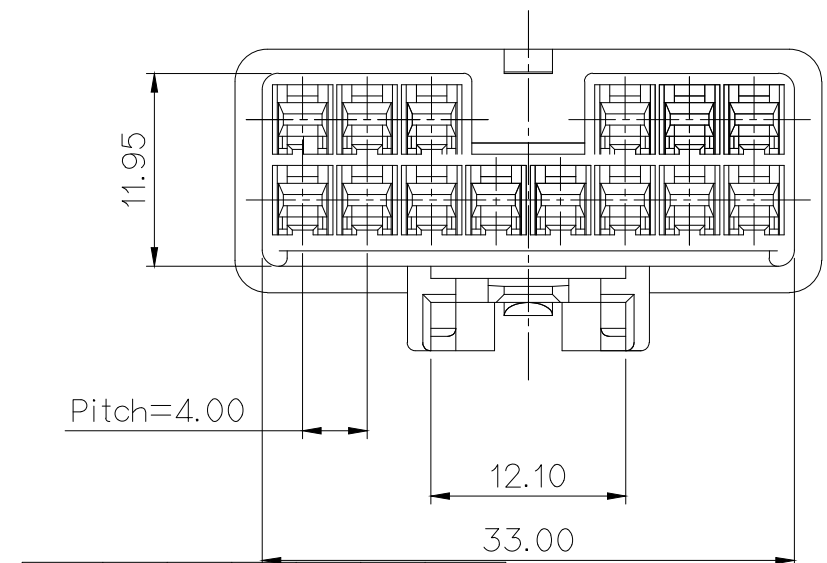


**APPROVED**

**2018-12-07**

**KOREA ELECTRIC TERMINAL CO., LTD.**  
Korea Electric Terminal Co., LTD.

ISSUE MARK

MATERIAL		PBT		FINISH		NATURAL		WIRE RANGE		CLASS .090	
INSULATION		TYPE		SCALE		2/1		PART NO.		MG622241	
LTR		REVISION RECORD		DR.		CHK.		APP.		DATE	
DR.		WON. 2001.8.22		CHK.		KKJ		APP.		7.31	
CHK.				APP.		CHOSH		PART NAME		ASC 14M HOUSING	
TOLERANCE EXCEPT AS NOTED		SEE TABLE		SCALE		2/1		PART NO.		MG622241	