
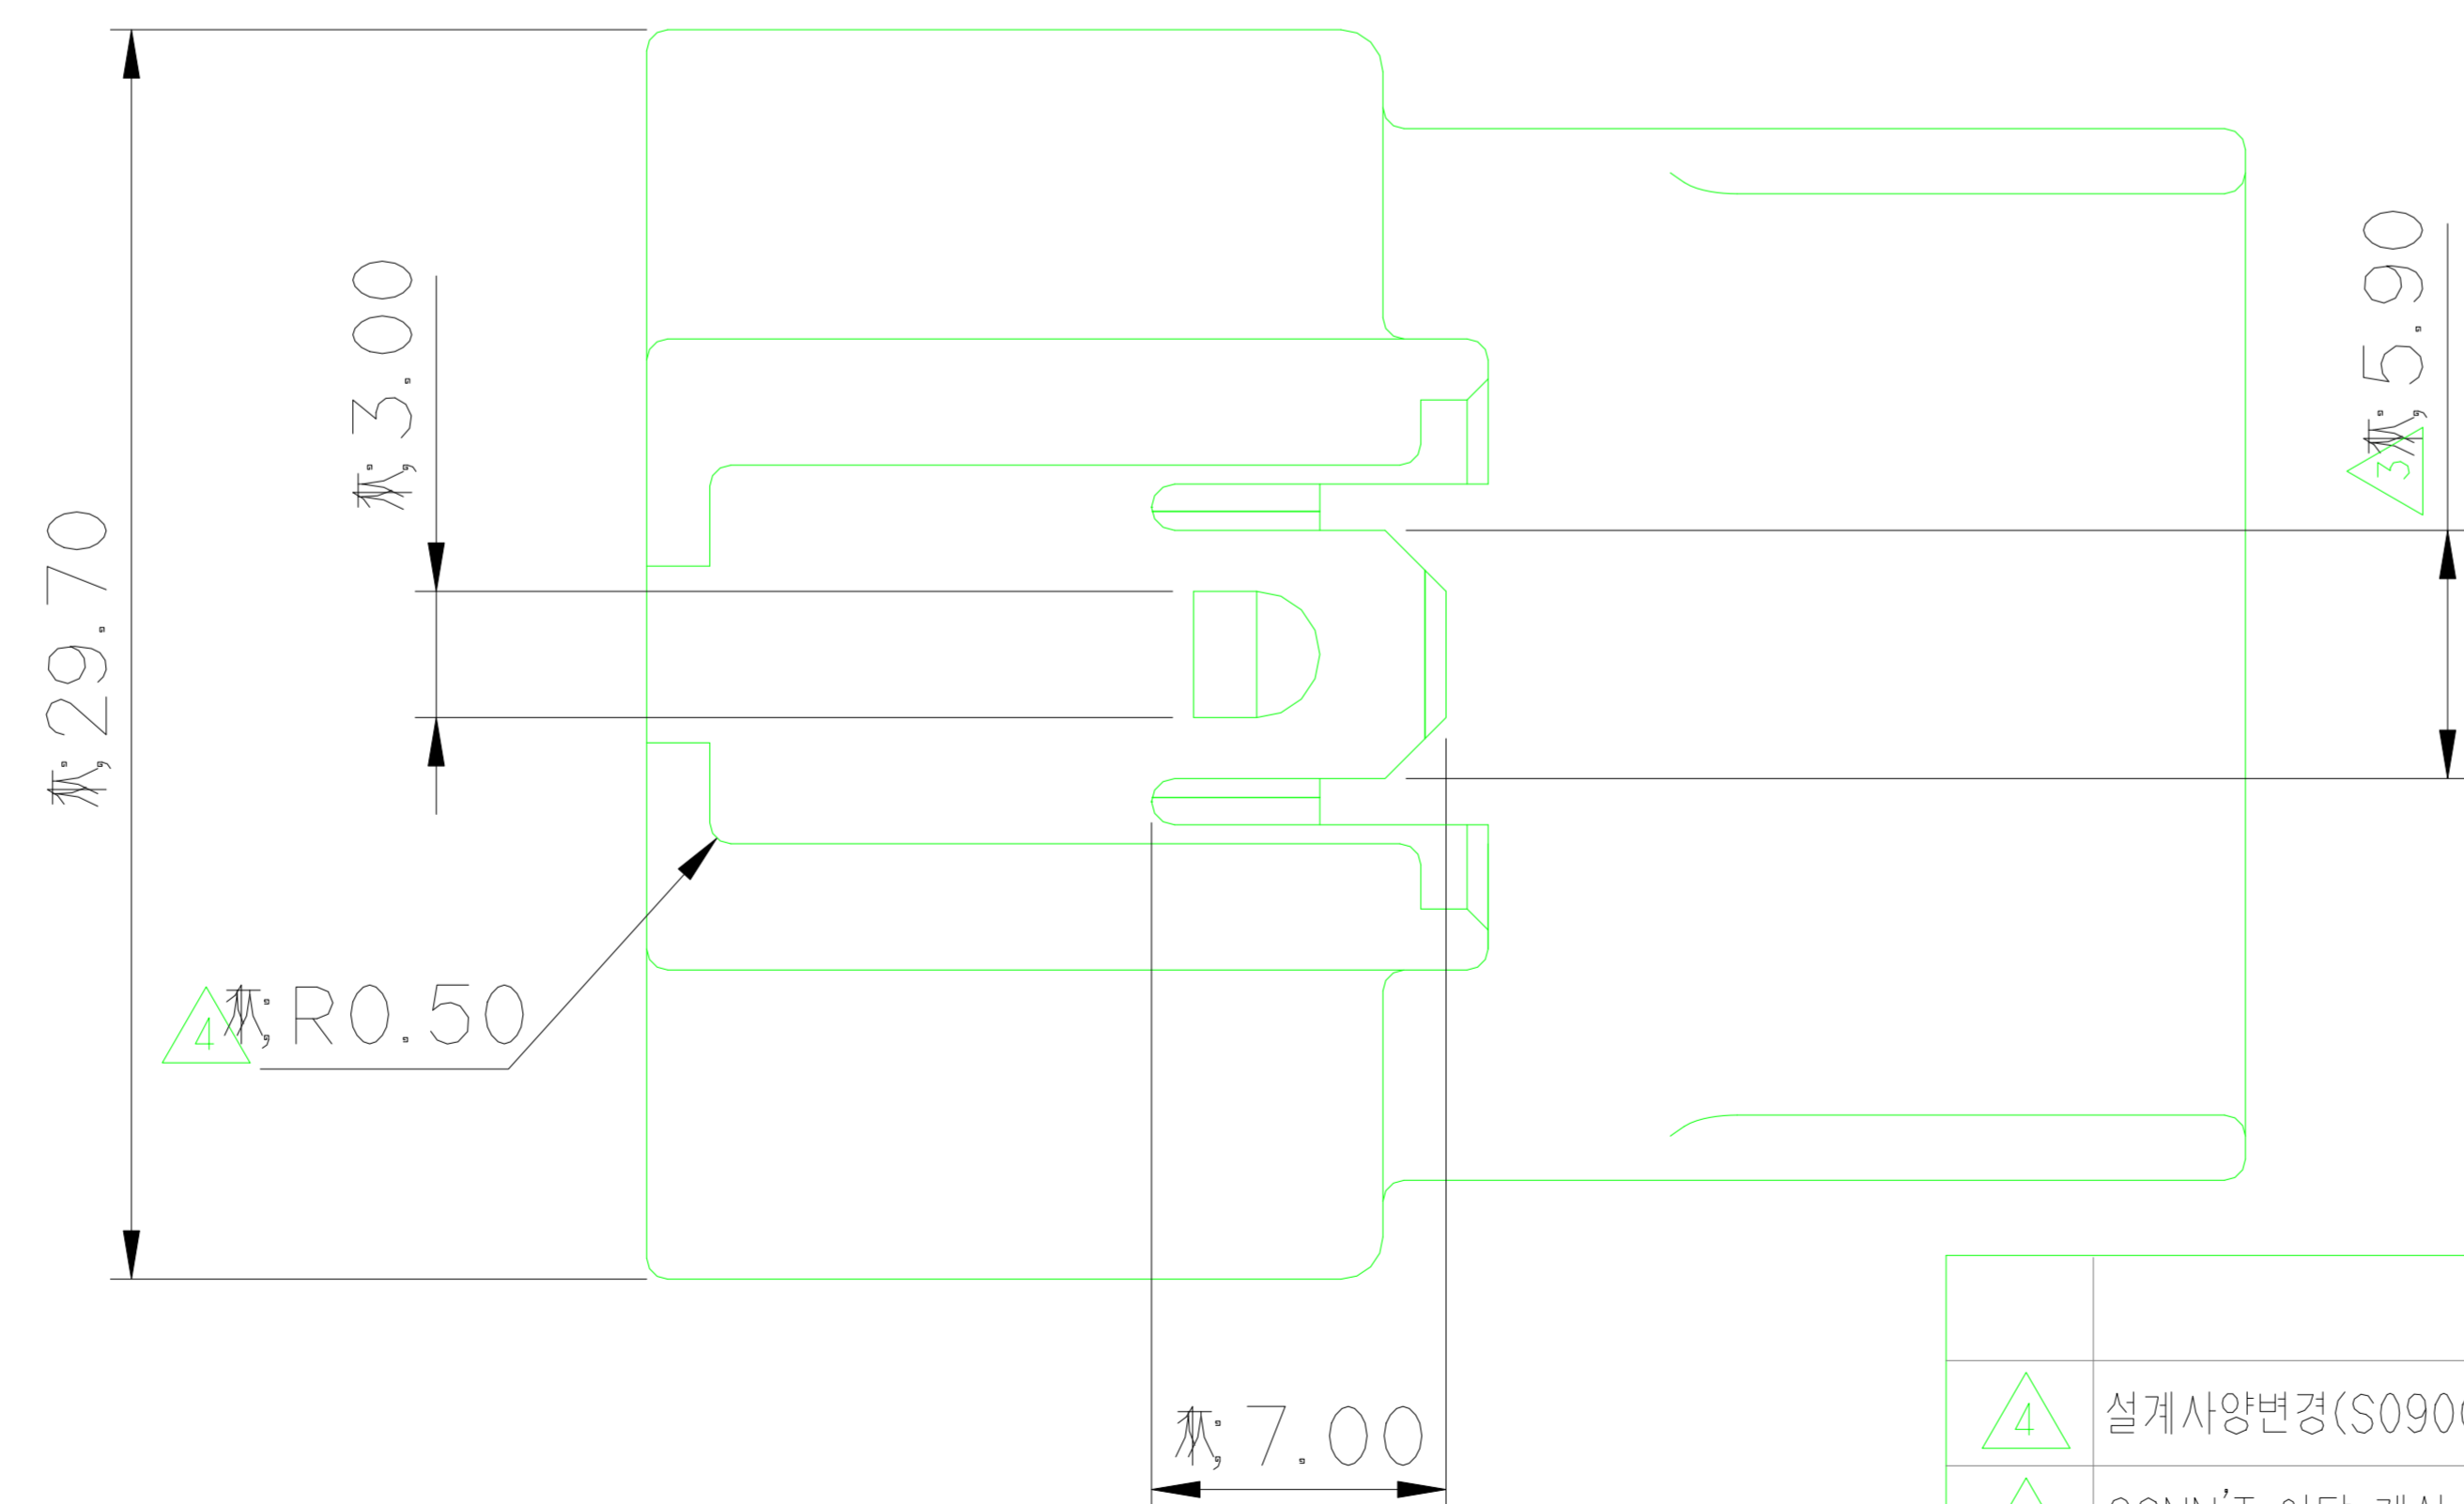
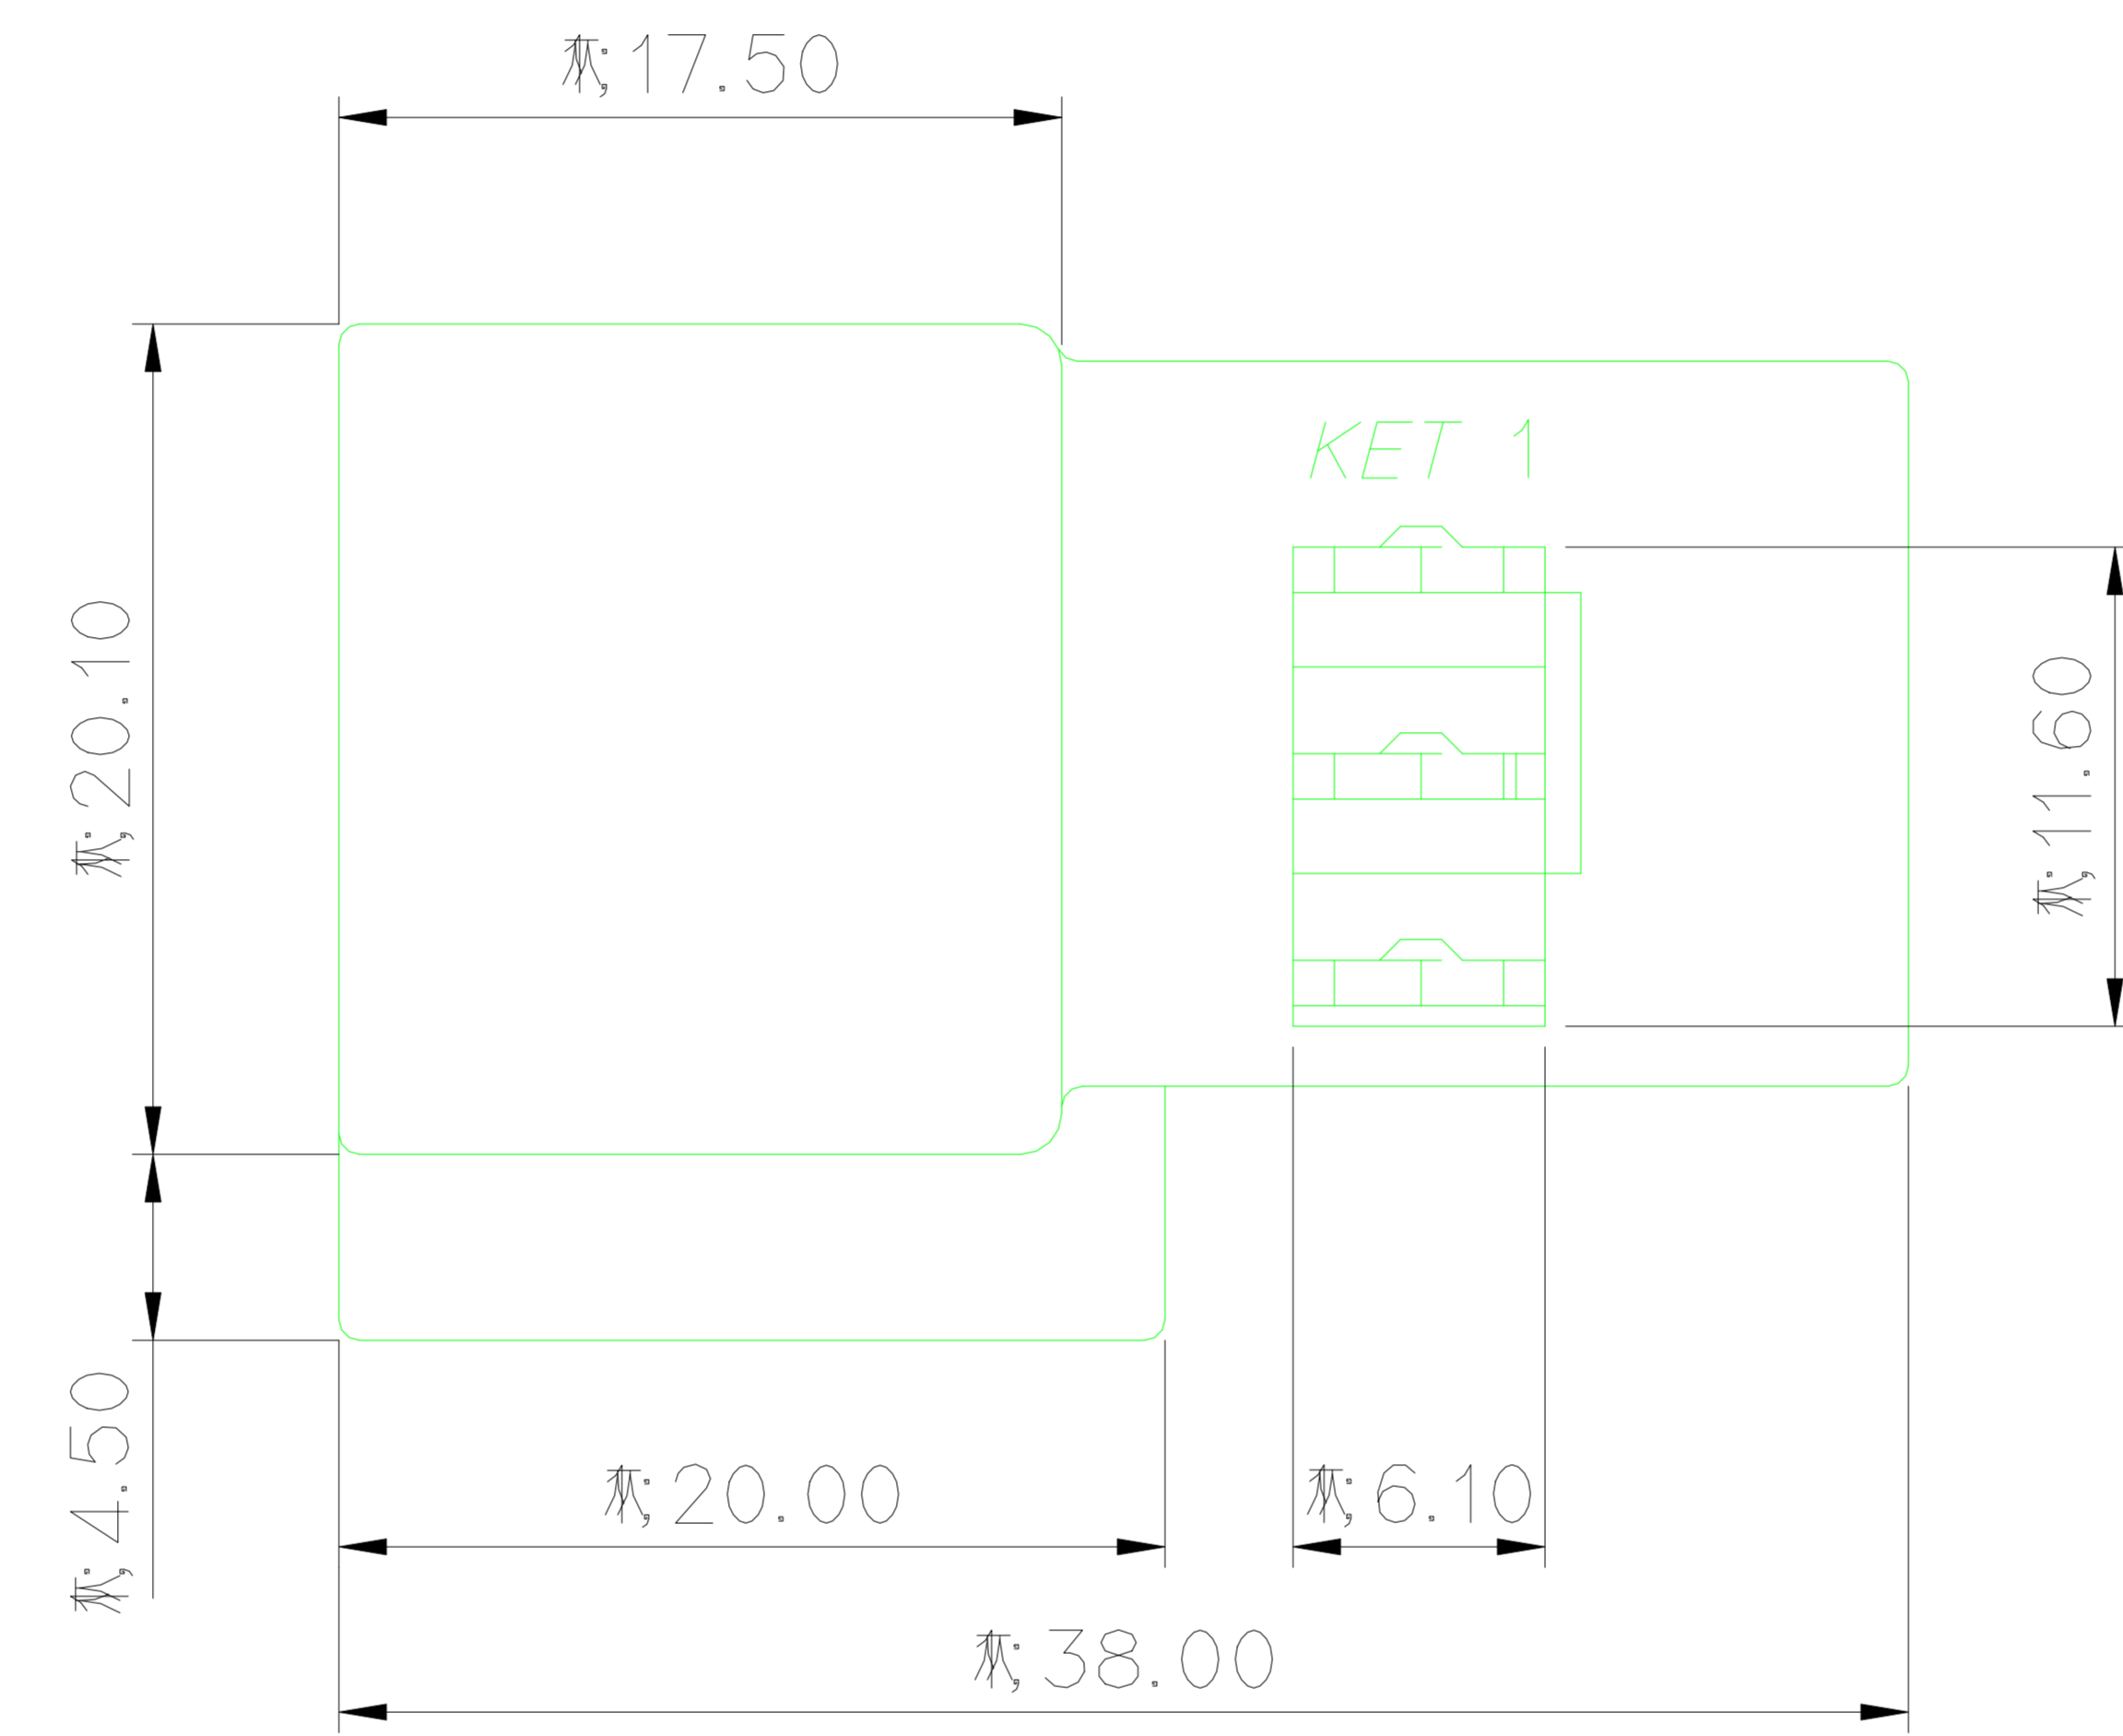


SECTION A-A

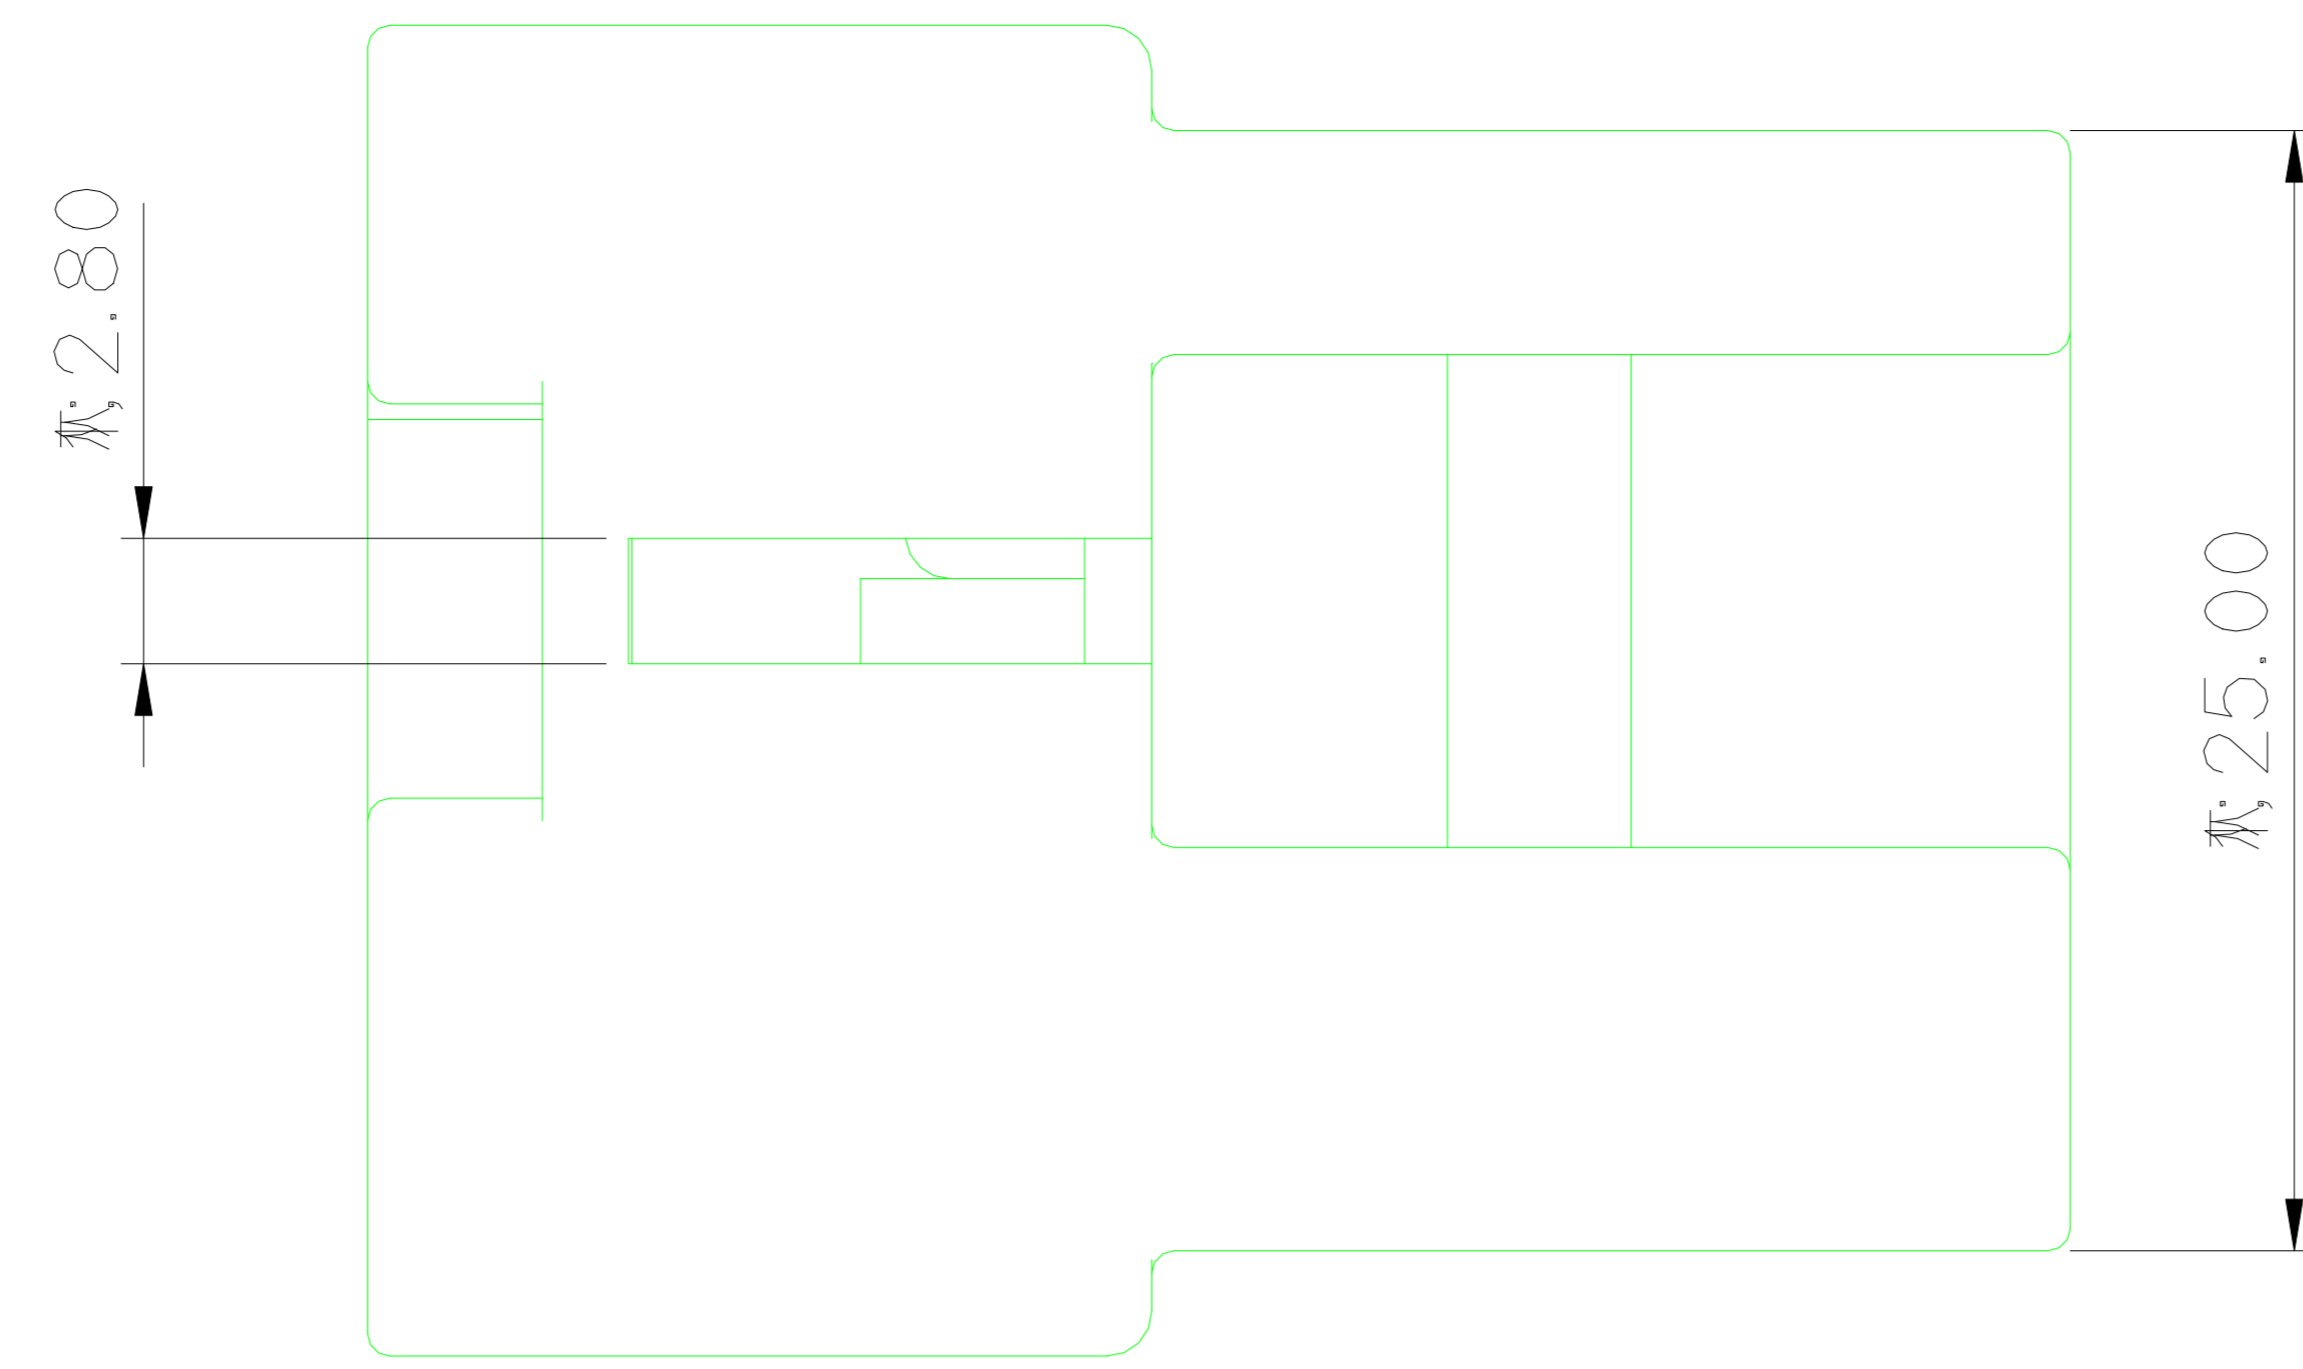


GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST740672, 673, 674
 APPLICABLE HOUSING: MG612243, MG651068
 APPLICABLE SPACER: MG632245
 APPLICABLE CLIP :MG631267, 631268, 631471, 632019

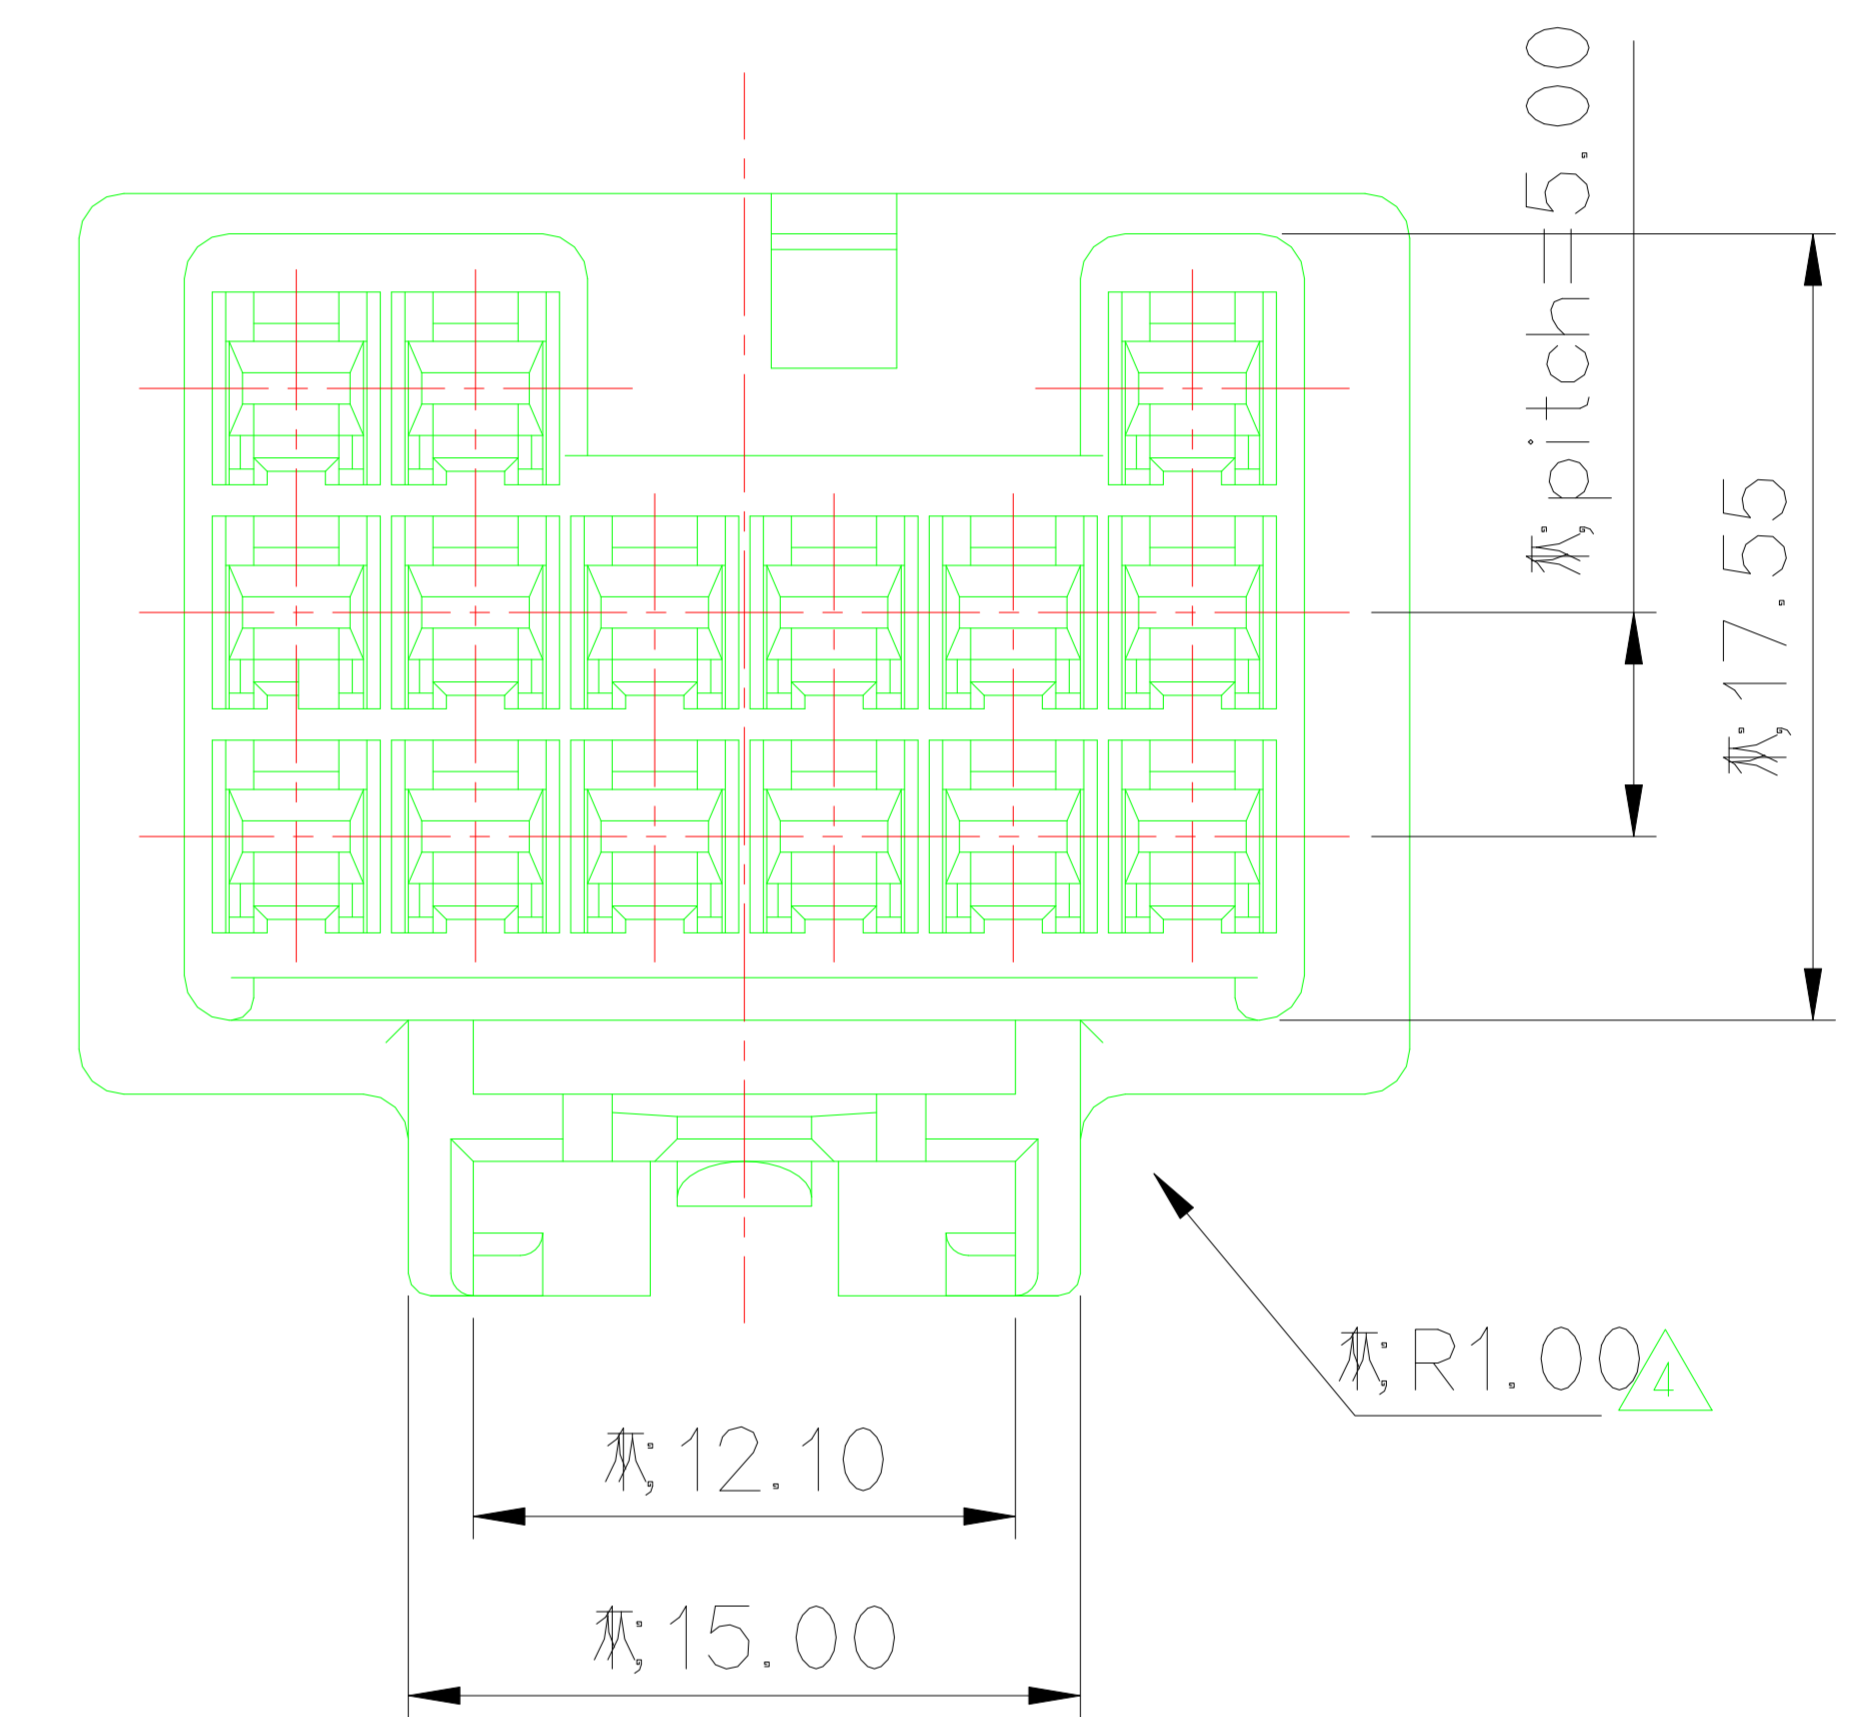

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST740672, 673, 674
 적용 HOUSING: MG612243, MG651068
 적용 SPACER: MG632245
 적용 CLIP: MG631267, 631268, 631471, 632019

ISSUE MARK

4	설계사양변경(S090035)근거 도면 재작성	BJG		'09.03.06	MATERIAL	PBT	KOREA ELECTRIC TERMINAL CO., LTD.	
3	CONN'T 이탈 개선 위한 CLIP부 형상 변경	KDJ		'05.07.25	FINISH	NATURAL		
2	CLIP부 수정	SWS		'02.06.05	WIRE RANGE		CLASS .090	
1	유격축소 (HOUSING)	SWS		'02.06.05	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG622244
DR.	WON. 2000.9.07	CHK.			4/15	SEE TABLE		
CHK.		APP.			4/24	PART NAME	ASC 15M HOUSING	