
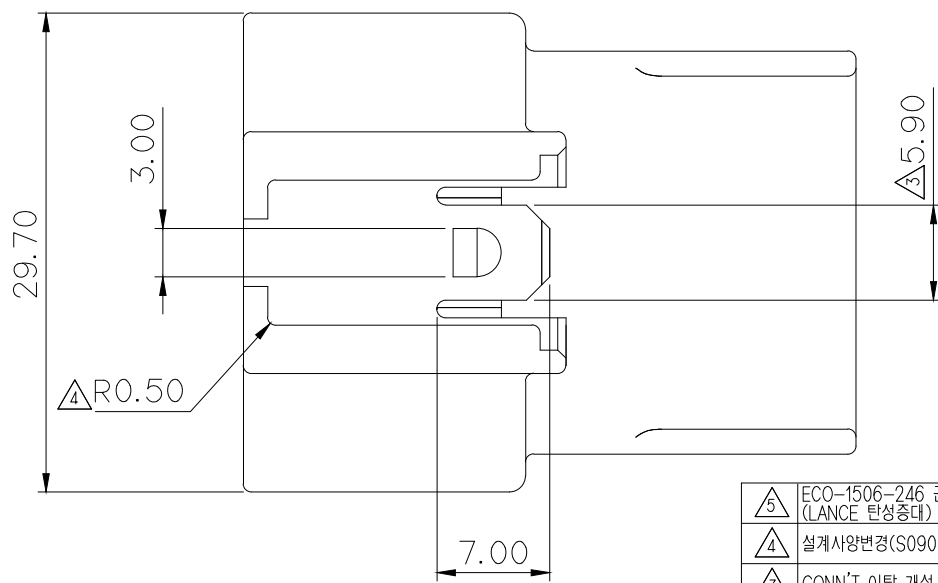
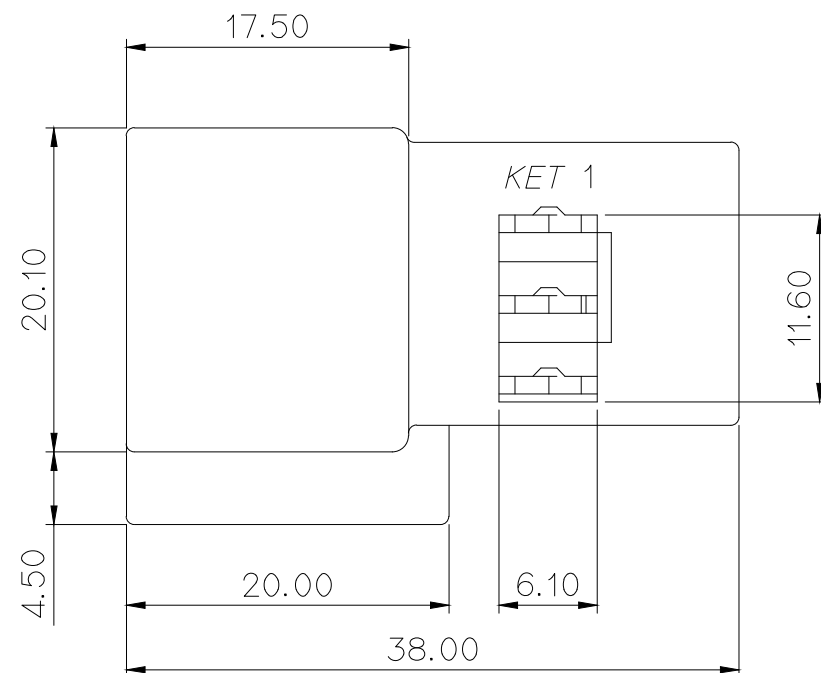



SECTION A-A

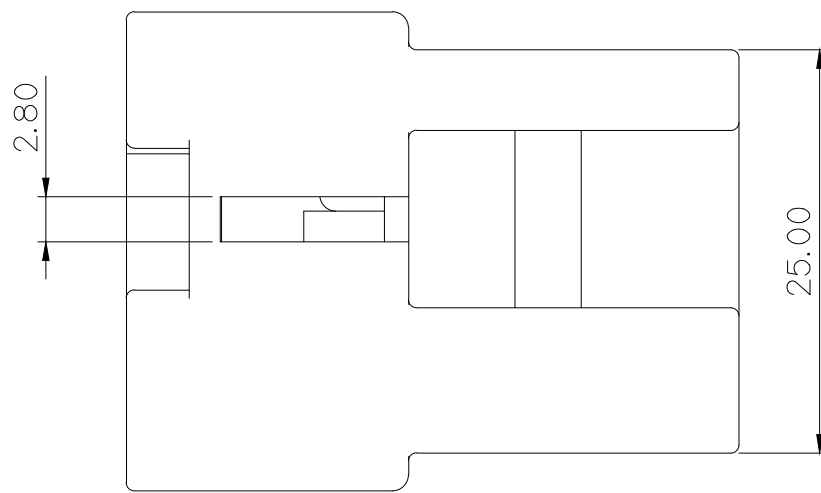

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST740672, 673, 674
 APPLICABLE HOUSING: MG612243, MG651068
 APPLICABLE SPACER: MG632245
 APPLICABLE CLIP :MG631267, 631268, 631471, 632019

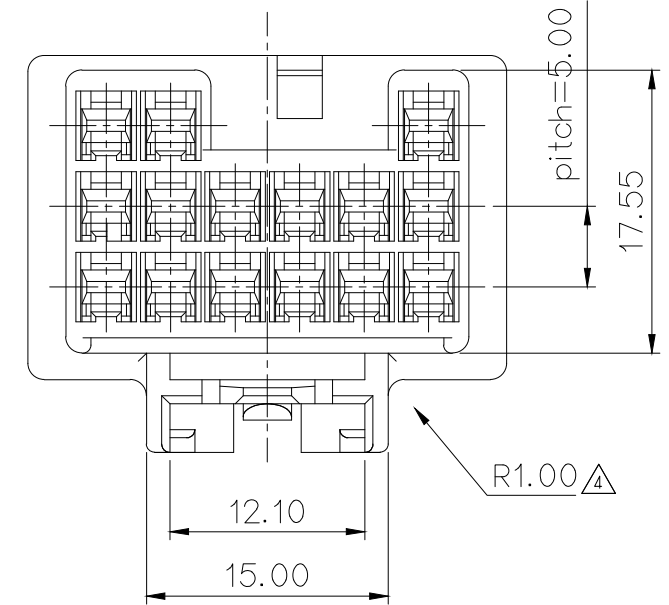

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST740672, 673, 674
 적용 HOUSING: MG612243, MG651068
 적용 SPACER: MG632245
 적용 CLIP: MG631267, 631268, 631471, 632019

APPROVED

2018-12-10

KOREA ELECTRIC
 TERMINAL CO., LTD.
 Korea Electric Te
 rminal Co., LTD.

ISSUE MARK

ECO-1506-246 근거 도면 재작성 (LANCE 탄성중대)	KCS	CKY	LSY	'15.06.16	MATERIAL	PBT	KOREA ELECTRIC TERMINAL CO., LTD.	
설계사양변경(S090035)근거 도면 재작성	BJG	LSY	KKJ	'09.03.06	FINISH	NATURAL		
CONN'T 이탈 개선 위한 CLIP부 형상 변경	KDJ	HSH	KKJ	'05.07.25	WIRE RANGE		CLASS .090	
CLIP부 수정	SWS	KKJ		'02.06.05	INSULATION		TYPE	
유격축소 (HOUSING)	SWS	KKJ		'02.06.05	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG622244	
LTR REVISION RECORD					DR. WON. 2000.9.07	CHK. KKJ	DATE 4/15	PART NAME
					DR. 2000.9.07	CHK. KKJ	DATE 4/15	ASC 15M HOUSING
					CHK. S.I. [Signature]	APP. S.I. [Signature]	DATE 4/24	