







GENERAL TOLERANCE (HOUSING)					USED ON
10MAX ±0.2	20MAX ±0.25	45MAX ±0.3	ANGLE ±30'	ECCENT 0.1	

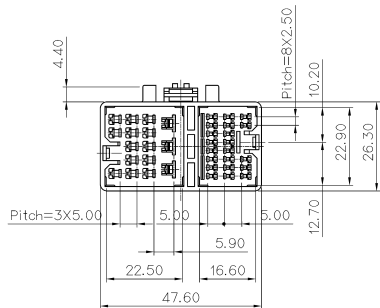

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL(090): ST740672, 673, 674
- 적용 TERMINAL(050): ST740753
- 적용 TERMINAL(187): ST740631,632,633
- 적용 HOUSING: MG611987(050), MG612391
- 적용 SPACER: MG631988(050), MG632392

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11	ORANGE	



ISSUE MARK

MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.			
FINISH	SEE TABLE				
WIRE RANGE		CLASS .090(16P) + 050(2P)			
INSULATION		TYPE HYBRID			
LTR	REVISION RECORD	DR	DATE	SCALE 1/1	PART NO. MG622390
DR.	KJLEE, 01.10.09	CHK			
CHK.		APP.		PART NAME	HYBRID 37P REC. HS'G