
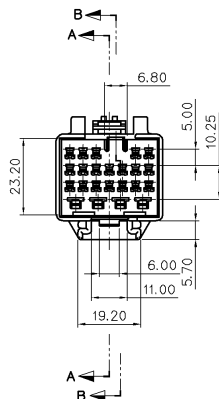




GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL: 090 - ST740672, 673, 674
적용 TERMINAL: 187 - ST740631, 632, 633
적용 HOUSING: MG612469
적용 SPACER: MG632472
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

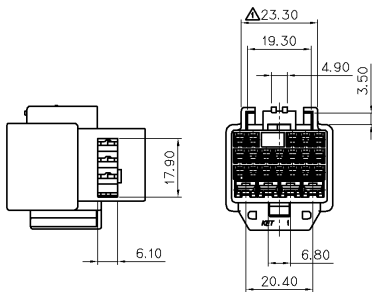

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
* 2		BLUE
* 3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

△NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL: 090 - ST740672, 673, 674
APPLICABLE TERMINAL: 187 - ST740631, 632, 633
APPLICABLE HOUSING: MG612469
APPLICABLE SPACER: MG632472
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

REVISION RECORD		MATERIAL		FINISH		WIRE RANGE		INSULATION		SCALE		PART NO.	
DR.	WON. 01.04.10	CHK.		PBT	SEE TABLE	CLASS	.090 II & .187 II	TYPE	HYBRID	SCALE	1/1	PART NO.	MG622471
APP.	4.10	CHK.		FINISH	SEE TABLE	TYPE		SCALE		PART NAME			
CHK.		APP.	4.10										

KET KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Terminal Co., Ltd.
090 II & .187 II
HYBRID
MG622471

1809.23M HOUSING