
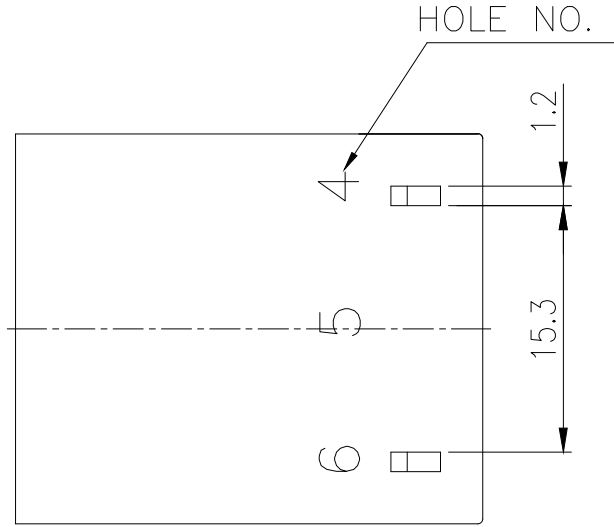
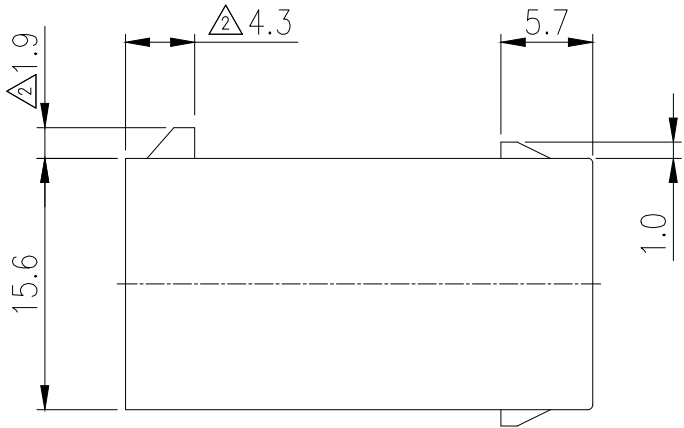
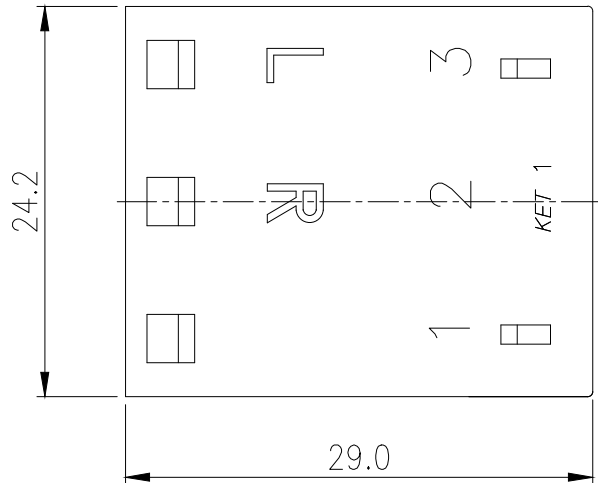


NOTE


1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : SEE TABLE1
3. APPLICATION REAR HOLDER : MG632541
4. APPLICABLE PLUG HOUSING :
 - L(LEFT) : MG611227
 - R(RIGHT) : MG611226
 - (NO MARK) : MG612540
 - INTEGRATED(4P) : MG612539
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

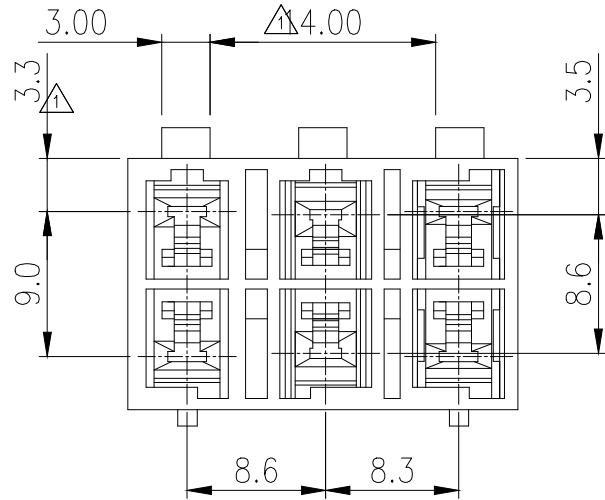

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

TABLE 1

HOLE NO.		TERMINAL NO.
1	4	ST740816,817,818,819
2	5	ST740833,834,835,836
3	6	ST740812,813,814,815

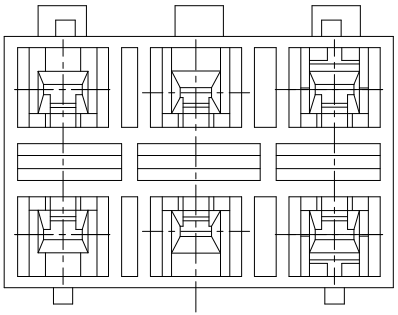

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: 표1참조
3. 적용 REAR HOUSING: MG632541
4. 적용 PLUG HOUSING:
 - L(LEFT) : MG611227
 - R(RIGHT) : MG611226
 - (NO MARK) : MG612540
 - INTEGRATED(4P) : MG612539
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL PBT(UL V-0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH NATURAL			
③	설계사양변경(S110128)근거도면재작성	PJM	KSH	11.04.28		WIRE RANGE			
②	설계사양변경(S070088)근거	JJY	CBH	07.04.09		INSULATION			
①	시방변경"030038"의거 도면재작성	LSY		03.03.03		TYPE		MULTI	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG622538
DR. OJM '01,07,24		CHK.KO		01.7.24		PART NAME 0709 MULTI 6P REC' HOUSING(4 & 2)			
CHK.		APP. H:\SIDN\sign_sldt.bmp		01.7.25					

ISSUE MARK