
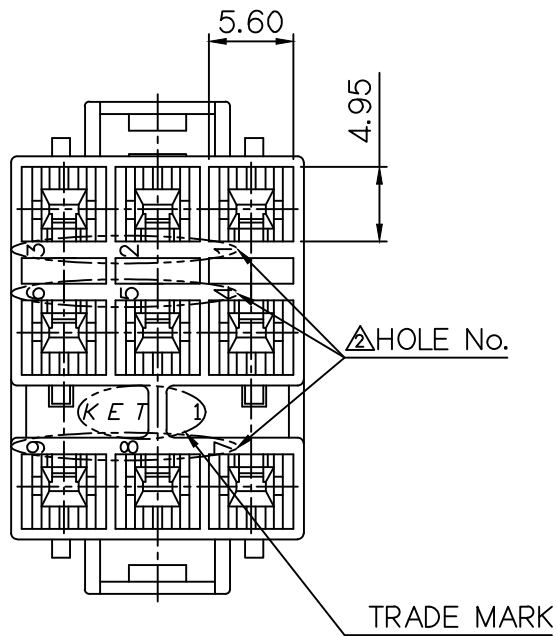
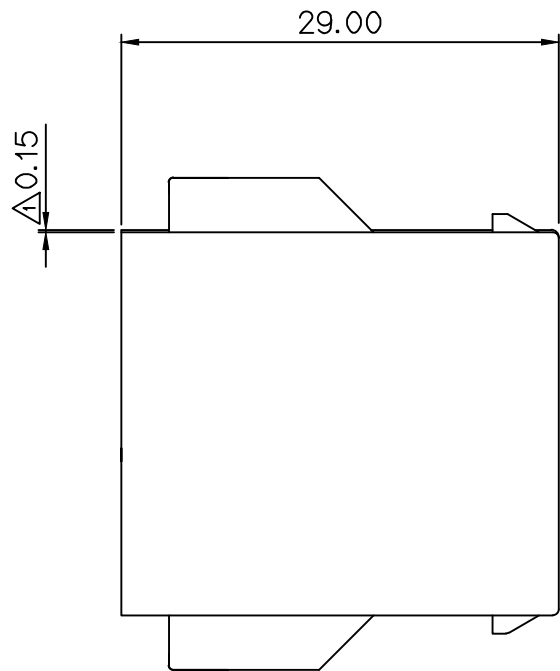
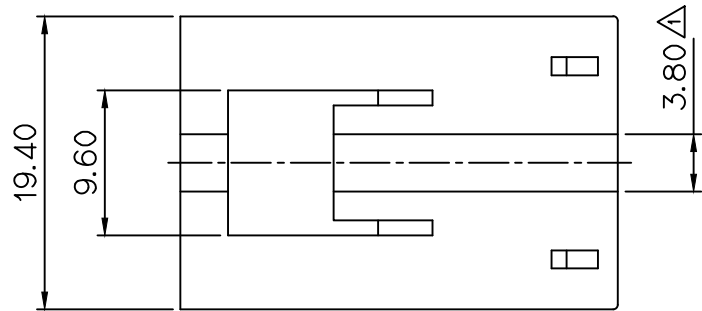


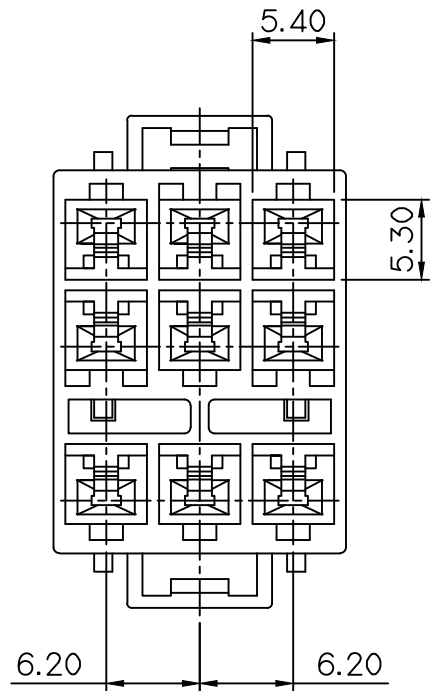

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740690,691,692,693,871-3
- APPLICABLE HOUSING : MG612725
- APPLICABLE R/HOLDER : MG631168-2
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740690,691,692,693,871-3
- 적용 HOUSING: MG612725
- 적용 R/HOLDER: MG631168-2
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL	PBT(V0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	NATURAL	
③	설계사양변경서'S110128'근거 도면재작성	KSH		11.04.29	WIRE RANGE		CLASS
②	시방변경'090289'의거 도면재작성	PJM		09.09.30	INSULATION		TYPE
①	시방변경'030139'의거 도면재작성	LSY		03.08.18	TOLERANCE EXCEPT AS NOTED		PART NO. MG622724
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SCALE 2/1
DR.	LSY 03.01.09		CHK.			1/10	PART NAME 1806 D/L 9P REC HS'G
			APP.			1/13	

ISSUE MARK	
------------	--