

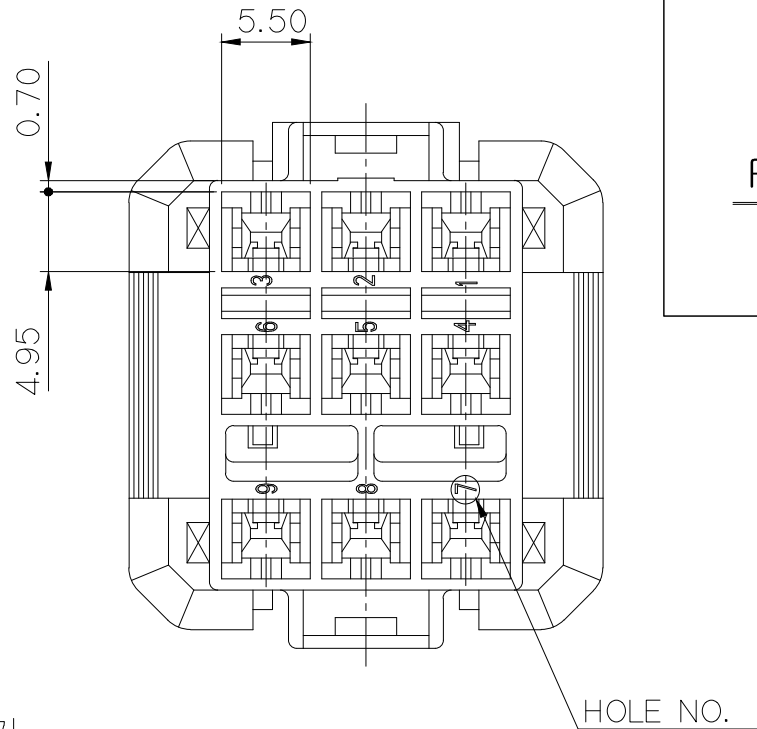
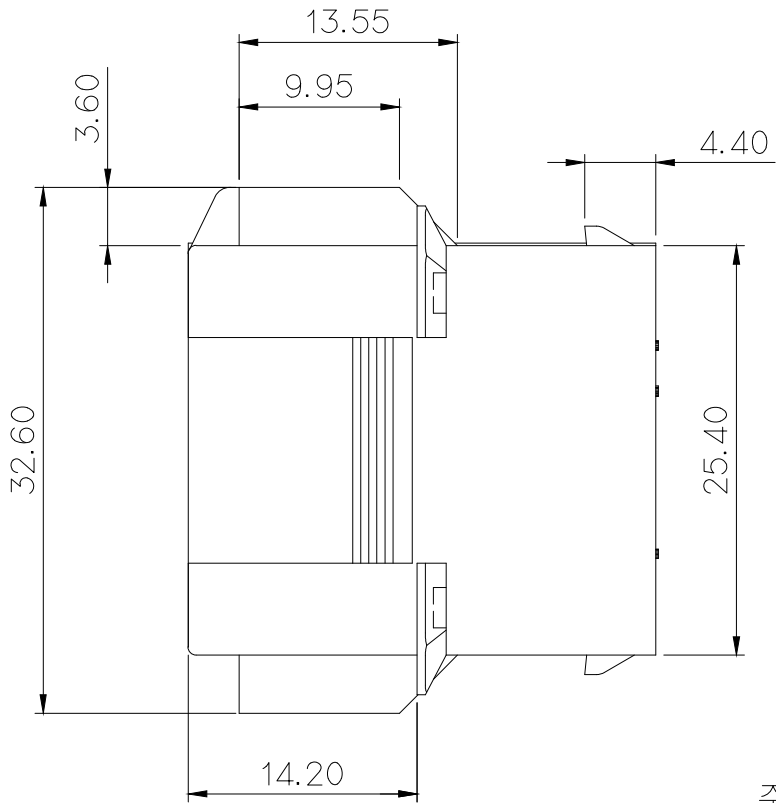
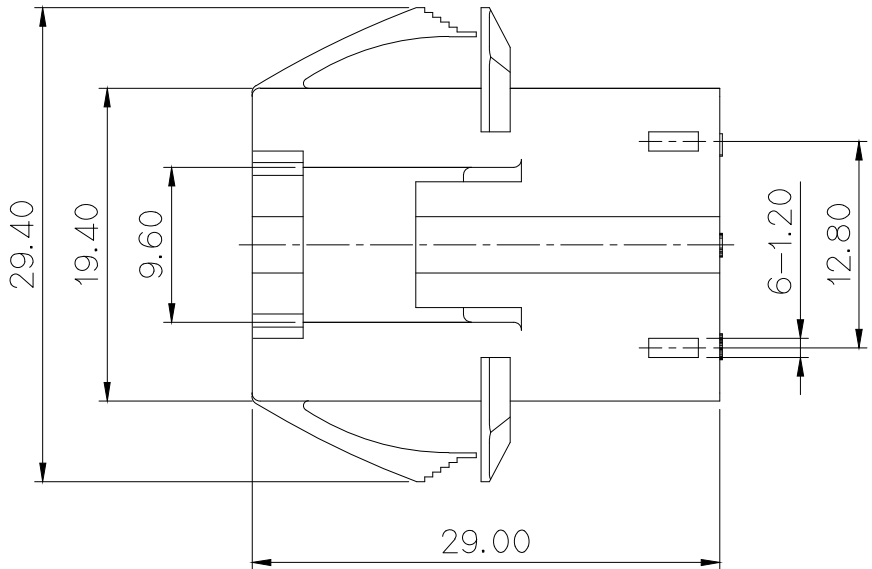
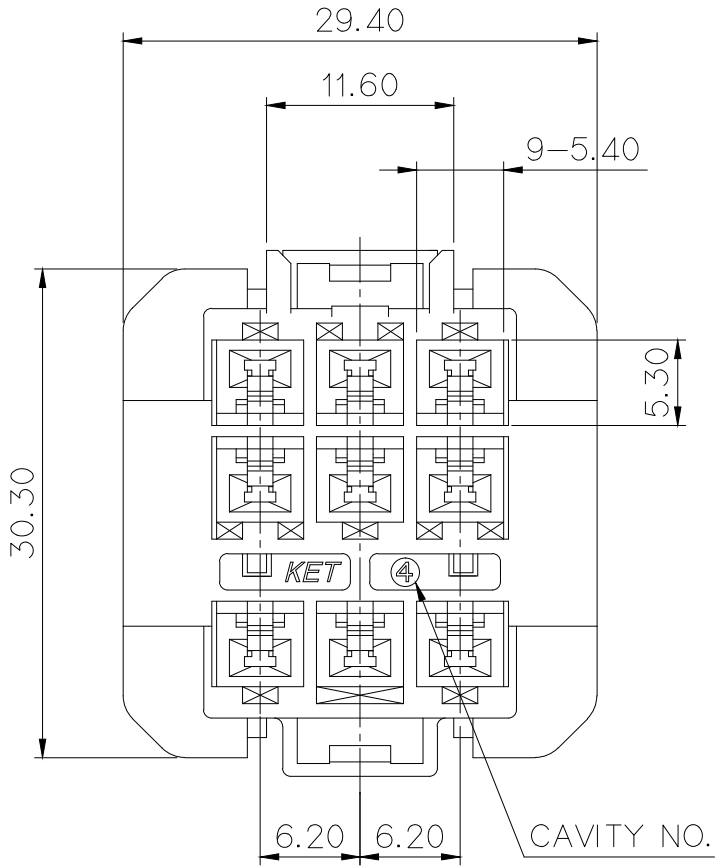


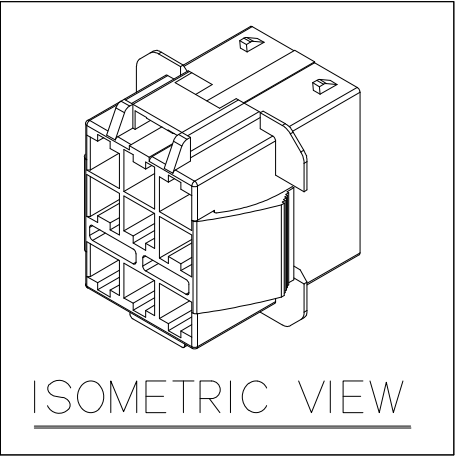

△ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

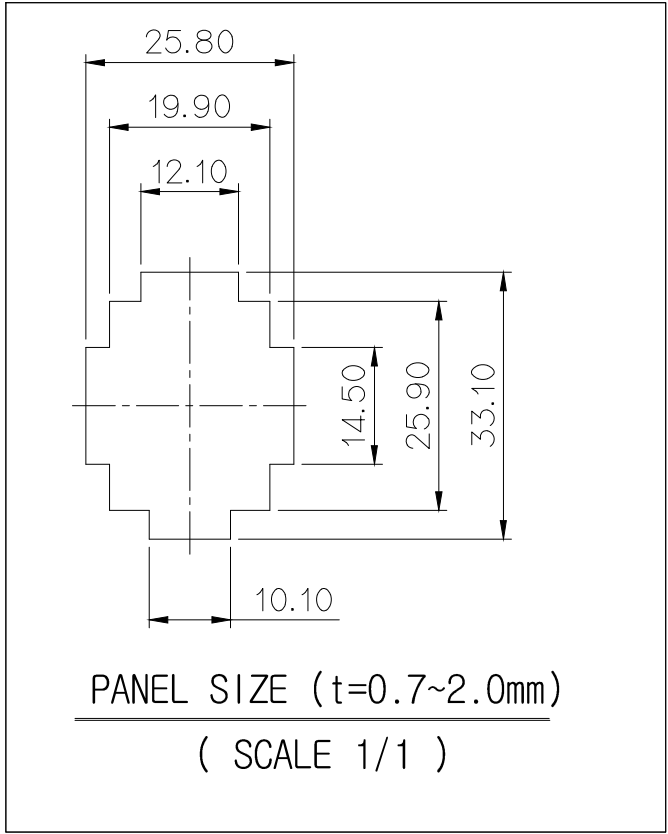

△	NO.	COLOR
*	0	NATURAL
*	1	RED
	2	BLUE
	3	YELLOW
	5	BLACK

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG612725T
TERMINAL : ST740871-3/690-3/691-3/692-3/693-3
REAR HOLDER : MG631168-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG612725T
터미널 : ST740871-3/690-3/691-3/692-3/693-3
리홀더 : MG631168-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL	PET+PC (GWIT)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	△SEE TABLE	
						WIRE RANGE		CLASS
						INSULATION		TYPE 1806 D/L
△	ECO-1703-225	SMG	KSH	BUC	'17.03.16	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG622880T
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
	DR. PJM '12.02.28		CHK. 2/28			PART NAME	1806DL 9M HSG_WING_GWIT	
	CHK.		APP. 2/28					

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK