
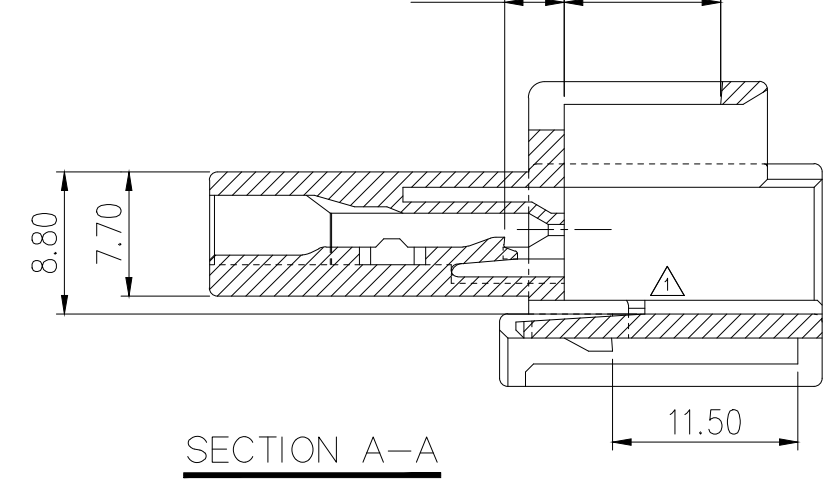
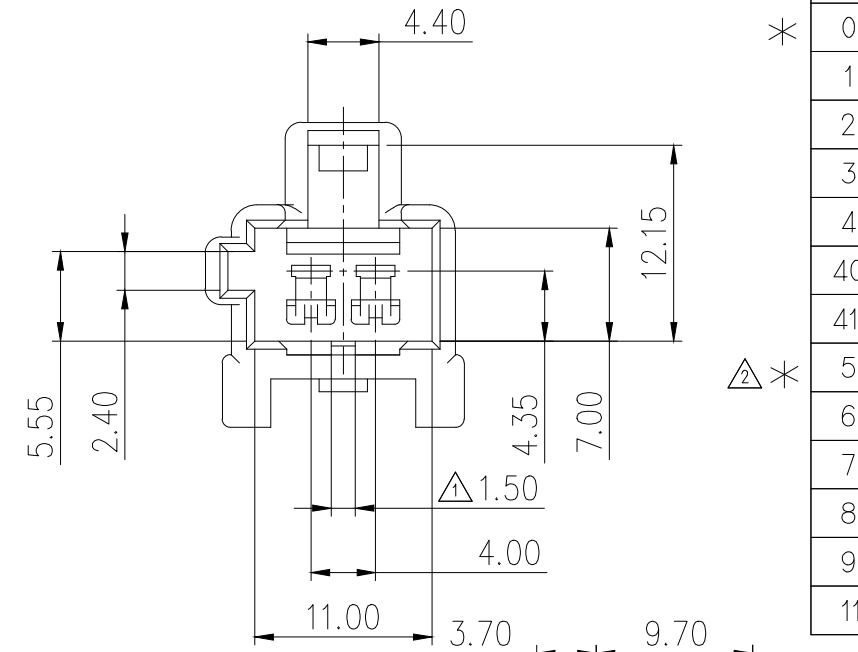
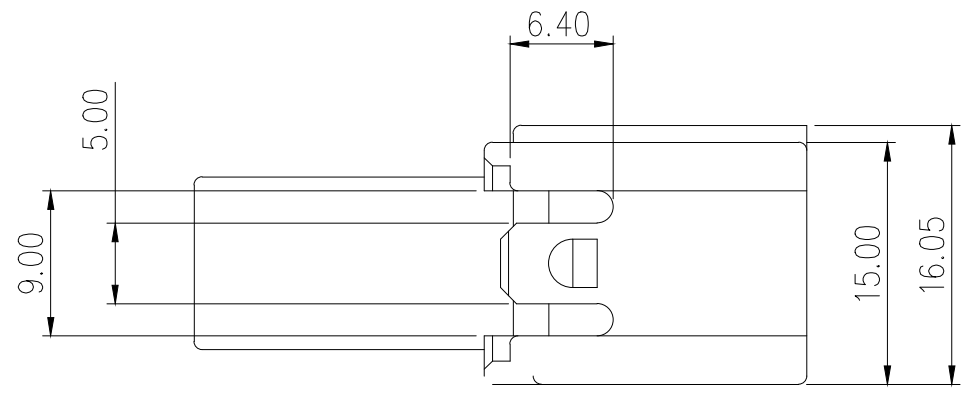
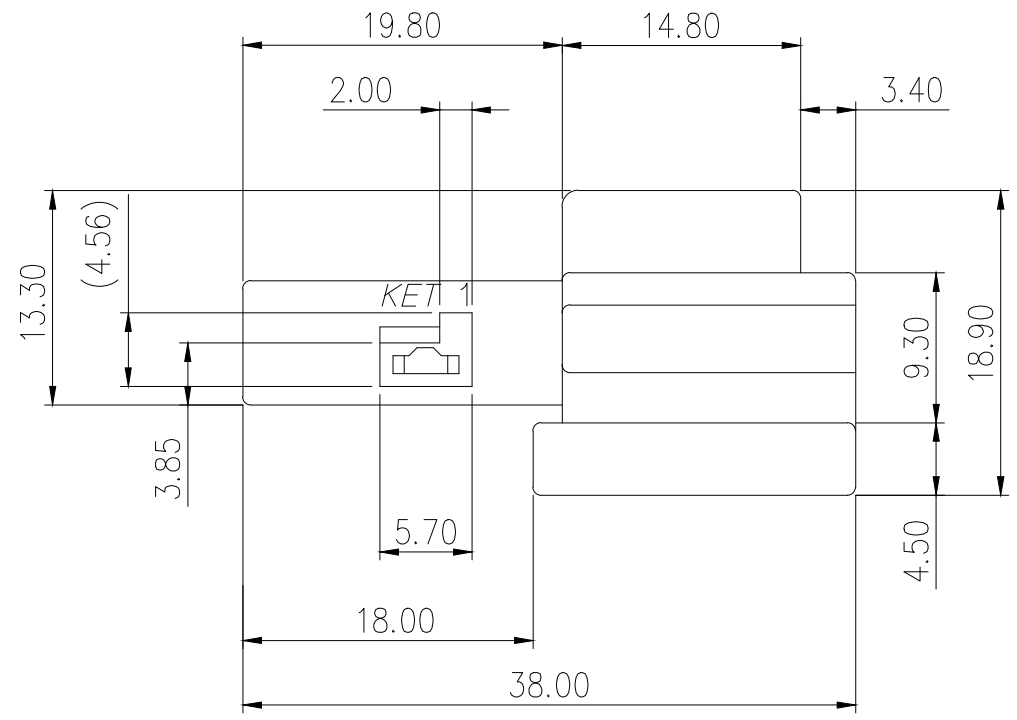
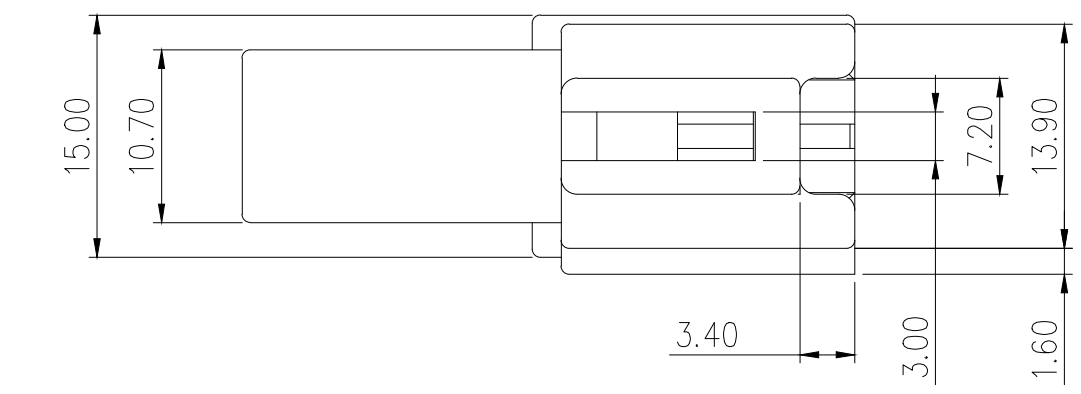
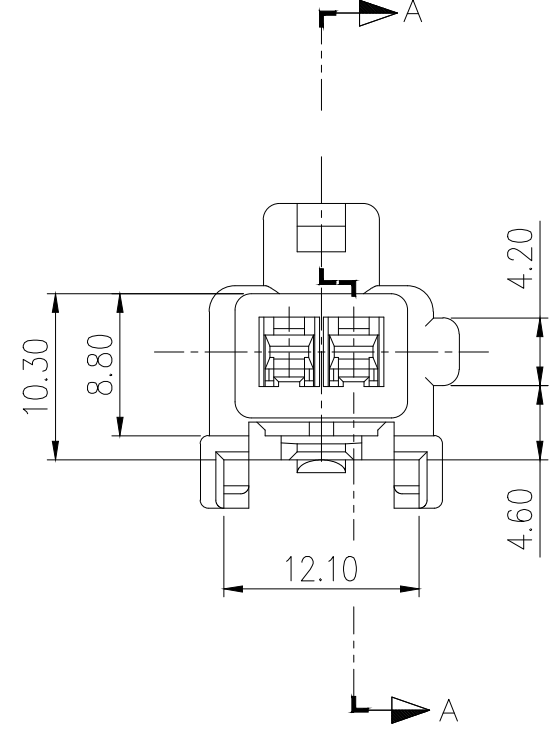


| GENERAL TOLERANCE (HOUSING) | | | | | | | USED ON |
|-----------------------------|--------|---------|---------|--------|-------|--------|---------|
| 10 MAX | 50 MAX | 100 MAX | 250 MAX | 250 VR | ANGLE | ECCENT | |
| ±0.2 | ±0.3 | ±0.55 | ±0.95 | ±1.4 | ±30' | 0.1 | |

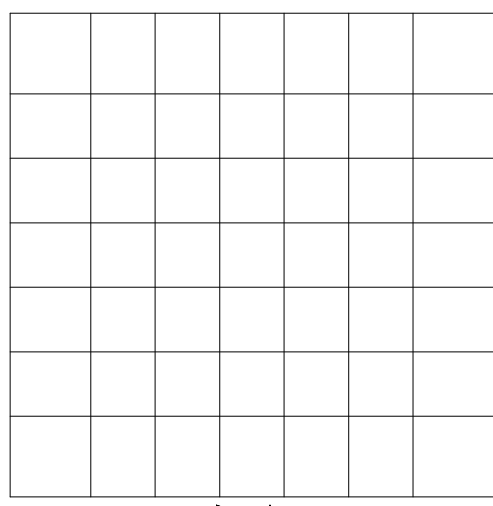

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740672, 673, 674
 APPLICABLE HOUSING : MG612950, MG651205
 APPLICABLE SPACER : MG631859
 APPLICABLE CLIP : MG631267, 631268, 631471, 632019

| NO. | MATERIAL | COLOR |
|-----|-----------------|-------------|
| 0 | PBT: HV1005S | NATURAL |
| 1 | | RED |
| 2 | | BLUE |
| 3 | | YELLOW |
| 4 | | GRAY |
| 40 | | DARK GRAY |
| 41 | | LIGHT GRAY |
| 5 | | BLACK |
| 6 | | DARK GREEN |
| 7 | | BROWN |
| 8 | | LIGHT GREEN |
| 9 | MAGENTA | |
| 11 | ORANGE | |



주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740672, 673, 674
 적용 HOUSING: MG612950, MG651205
 적용 SPACER: MG631859
 적용 CLIP: MG631267, 631268, 631471, 632019

| | | | | | | |
|------|-----------------|------------|-----------|-----------|------------------------|---------------------------|
| | | MATERIAL | PBT | | KOREA ELECTRIC | |
| | | FINISH | SEE TABLE | | TERMINAL CO., LTD. | |
| | | WIRE RANGE | CLASS | | .090 | |
| | | INSULATION | TYPE | | | |
| LTR | REVISION RECORD | DR. | CHK. | APP. | DATE | TOLERANCE EXCEPT AS NOTED |
| | | | | | | SCALE 2/1 |
| | | | | | | PART NO. MG622951 |
| DR. | KDJ. 05.05.23 | CHK. | | PART NAME | | |
| CHK. | | APP. | KKJ. | 5/23 | ASC 2M HOUSING (RIGHT) | |