







SECTION A-A



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL(090): ST740672, 673, 674
- 적용 TERMINAL(050): ST740753
- 적용 HOUSING: MG611985, MG611987
- 적용 SPACER: MG631986, MG631988

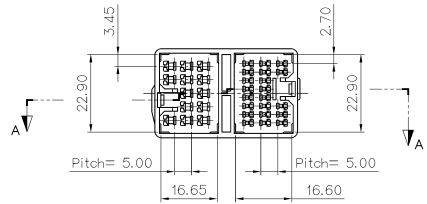

ISSUE MARK

MATERIAL		PBT			KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH		NATURAL				
WIRE RANGE				CLASS .090III(13P)+050(21P)		
INSULATION				TYPE HYBRID		
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO. MG623129
DR.	WON. 03.06.19	CHK.			6/19	SCALE 1/1 DOOR 34P REC. HOUSING (HOLE TYPE)
CHK.		APP.			6/19	