
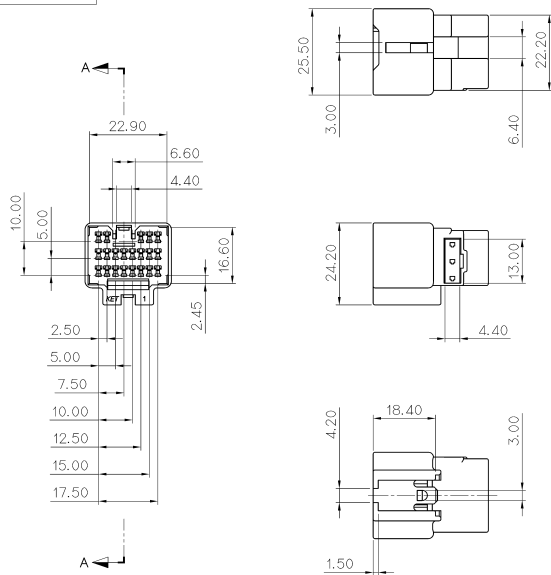




NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740753
APPLICABLE HOUSING : MG611987
APPLICABLE SPACER : MG631988


주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST740753
적용 HOUSING : MG611987
적용 SPACER : MG631988

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON



ISSUE MARK

				MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	BLACK	
				WIRE RANGE		CLASS .050
				INSULATION		TYPE
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO. MG623343
DR.	KD.J. '04.11.23	CHK.				
CHK.		APP.				
				PART NAME .050 21P MALE HOUSING		