

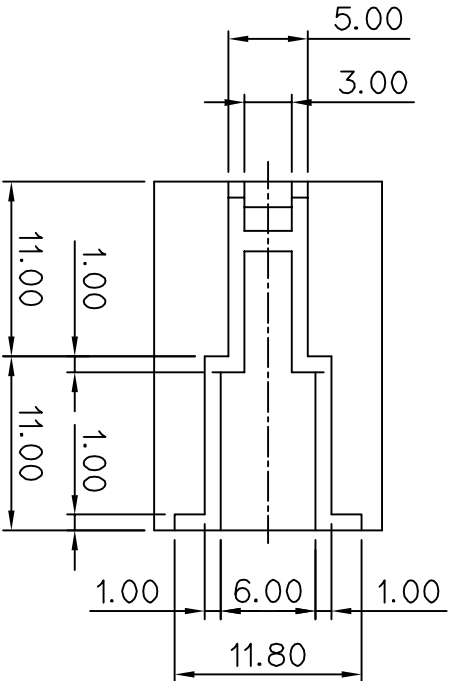
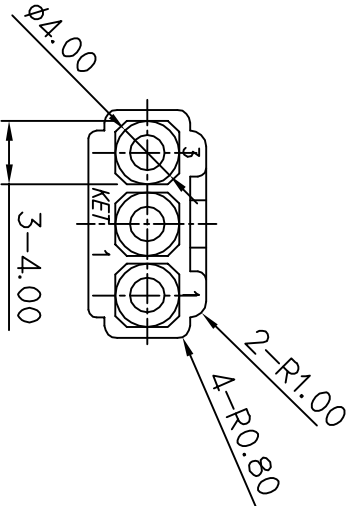
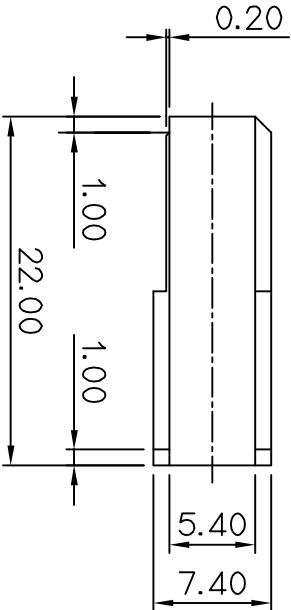


GENERAL TOLERANCE (HOUSING)					USED ON	
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

PART NO. MG623377

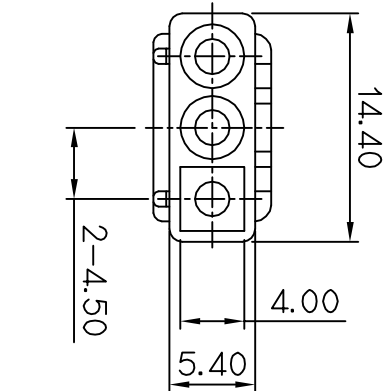

NO.	MATERIAL	COLOR
0	NYLON66	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

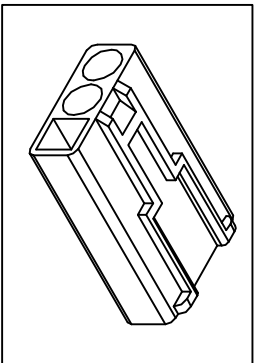


NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST750293,294
APPLICABLE HOUSING : MG610026
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST750293,294
상대 HOUSING : MG610026
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

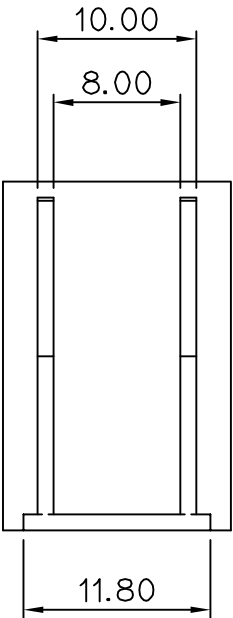

					MATERIAL		NYLON66		 KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH		SEE TABLE			
					WIRE RANGE		CLASS			
					INSULATION		TYPE			
△	설치방법(시공)은 그 도면 제작성			K.S.I.	→ 10/2 10/2			11.04.27		
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	
DR.	LSY 04.12.24			CHK.				SCALE	PART NO.	
CHK.	APP.							PART NAME		
ø1.3 3M HOUSING										