



GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.




2. APPLICABLE TERMINAL : ST740829-3, 830-3

APPLICABLE REAR HOLDER : MG631230-5

3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION

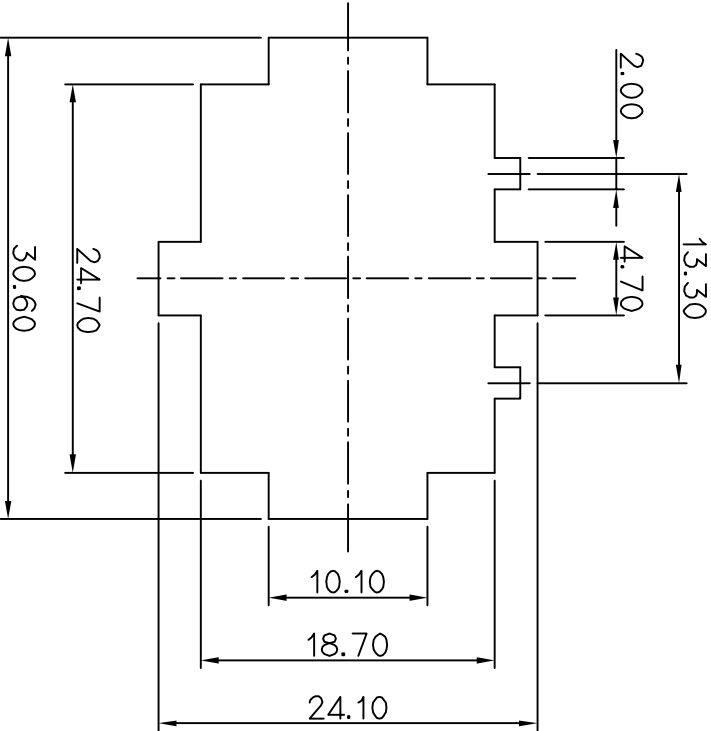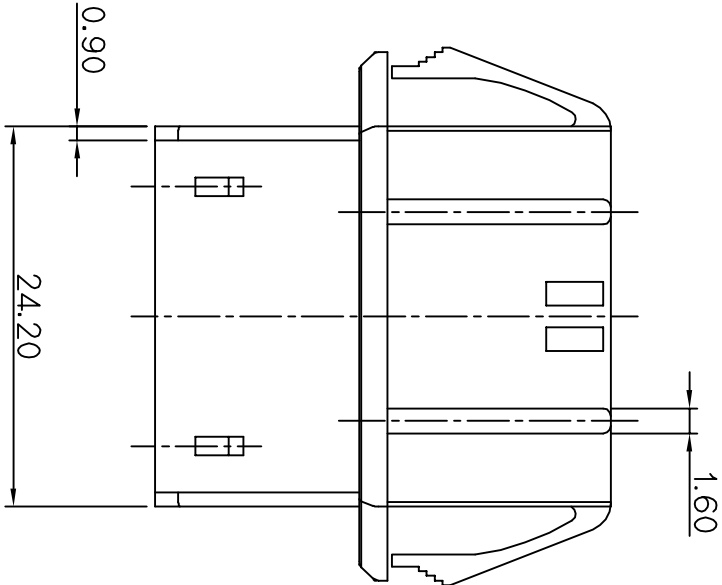

PANEL SIZE

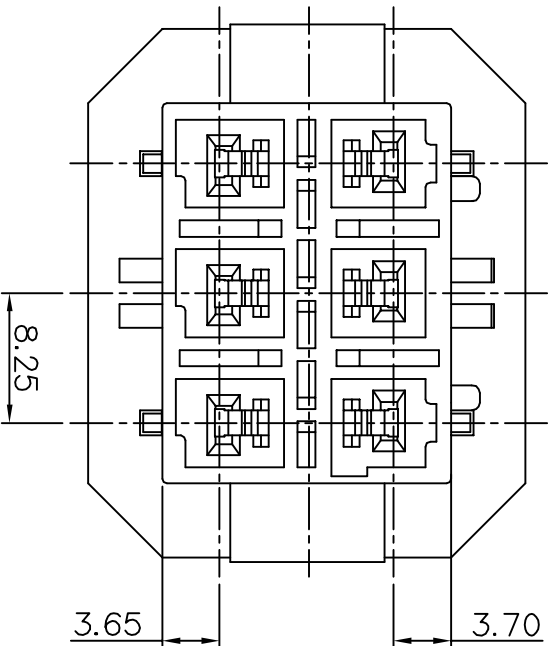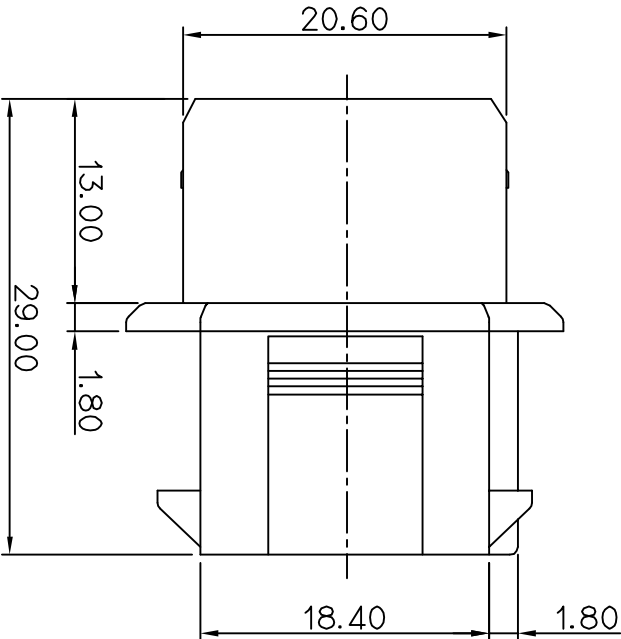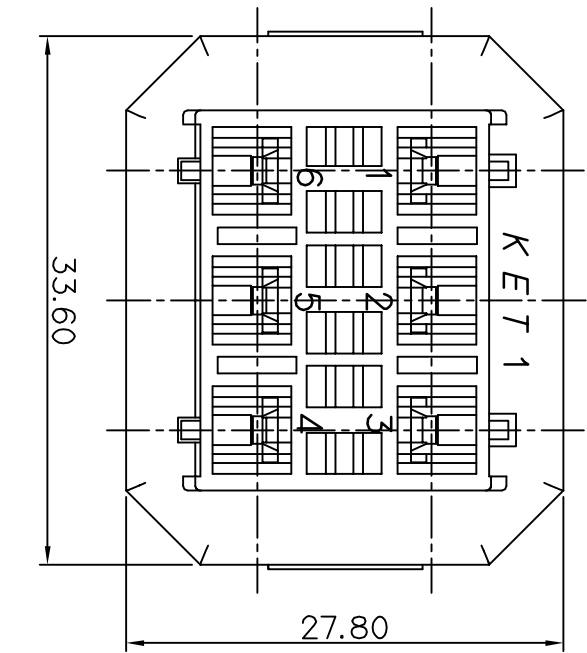

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 터미널 : ST740829-3, 830-3

적용 REAR HOLDER : MG631230-5

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

ISSUE MARK

MATERIAL △PET+PC(GWIT)
FINISH SEE TABLE
WIRE RANGE
INSULATION
TOLERANCE AS NOTED
SCALE 2/1
PART NO. MG623697T

KIET KOREA ELECTRIC
TERMINAL CO., LTD.
CLASS 0709 MULTI

△	ECO-1409-113군거 도면 제작성	LCM KSH	BUC	14.09.19
LTR	REVISION RECORD	DR. CHK.	APP.	DATE
DR.	KIM.S.J	'12.04.03	CHK.	
CHK.	김희영	APP.	정영민	

0709 MULTI 6M HOUSING

CUSTOMER DRAWING

PART NO. MG623697T

(DIMENSIONS IN MM)