
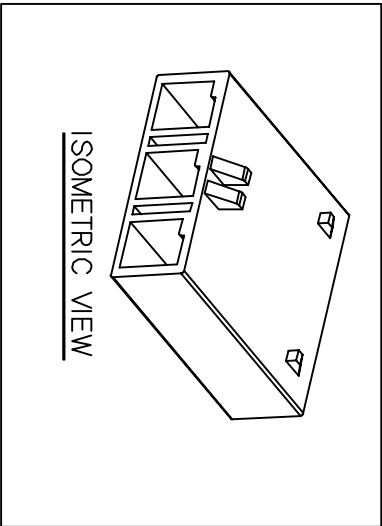
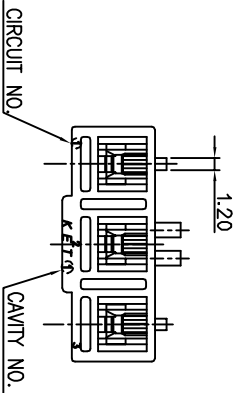
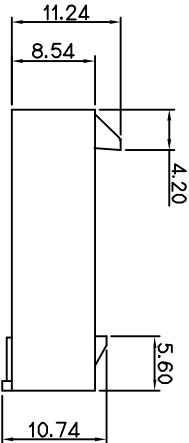
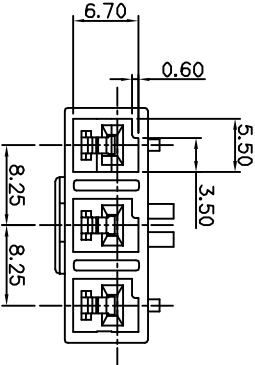


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
- AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740829-3,830-3,831-3
- APPLICABLE HOUSING : MG613698
3. HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

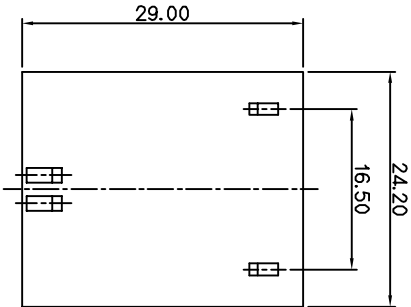

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST740829-3,830-3,831-3
- 적용 HOUSING : MG613698
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NO.	MATERIAL	COLOR
0	PBT (VO)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

MATERIALPBT (VO)

FINISHSEE TABLE

WIRE RANGEC

INSULATION

CLASSMULTI

TYPE

PART NO.

MG623789

KEI

KOREA ELECTRIC

TERMINAL CO., LTD.

				MATERIAL		PBT (V0)		KEIT KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH		SEE TABLE			
				WIRE BUNDLES				CLASS MULTI	
				INSULATION				TYPE	
REVISION RECORD				DATE		SCALE		PART NO.	
DR. KSH. 2006.10.09				CHK.		2/1		M0623789	
CHK.				APP.		PART NAME		.070 MULTI 3M(A) HOUSING	