

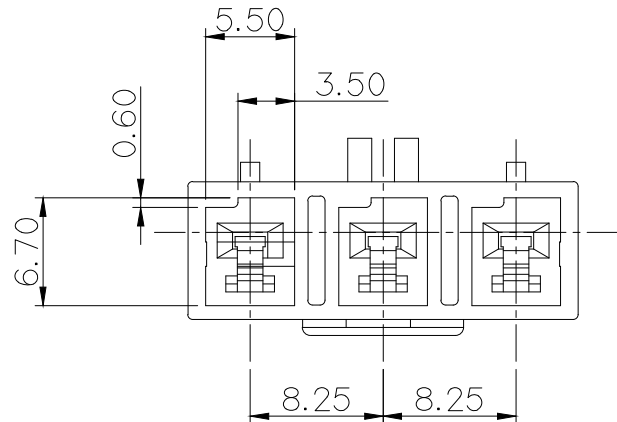
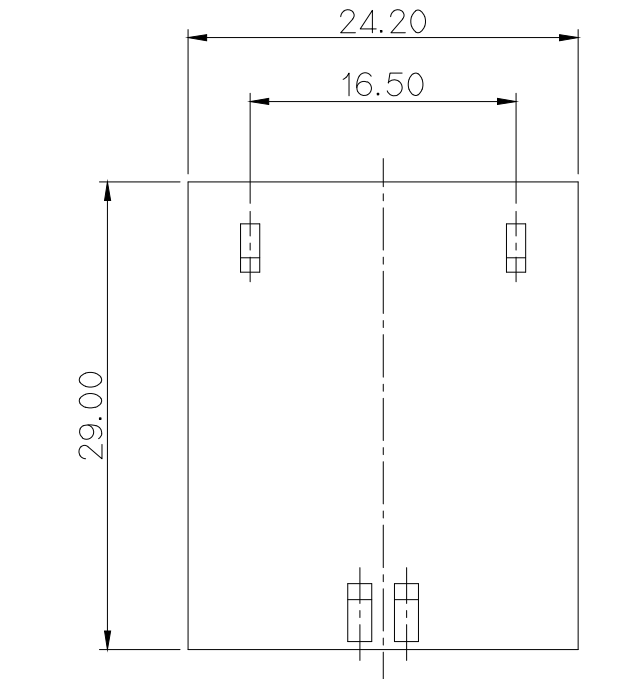
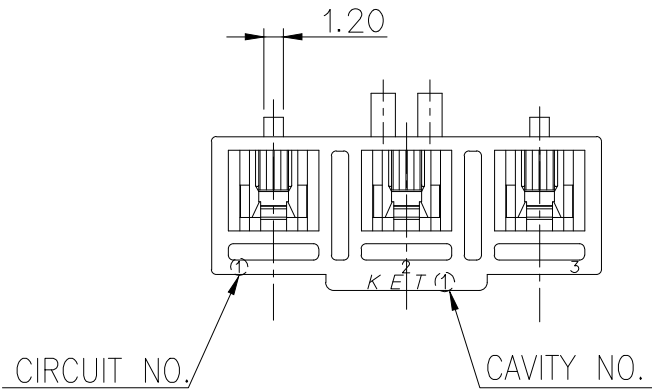


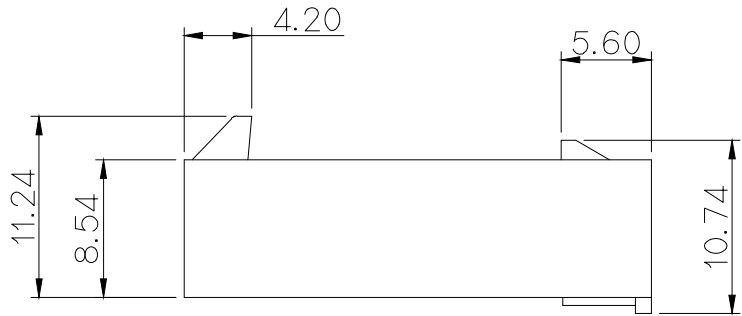

NOTE

- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPICABLE TERMINAL : ST740829-3,830-3,831-3
APPICABLE HOUSING : MG613698
- 3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

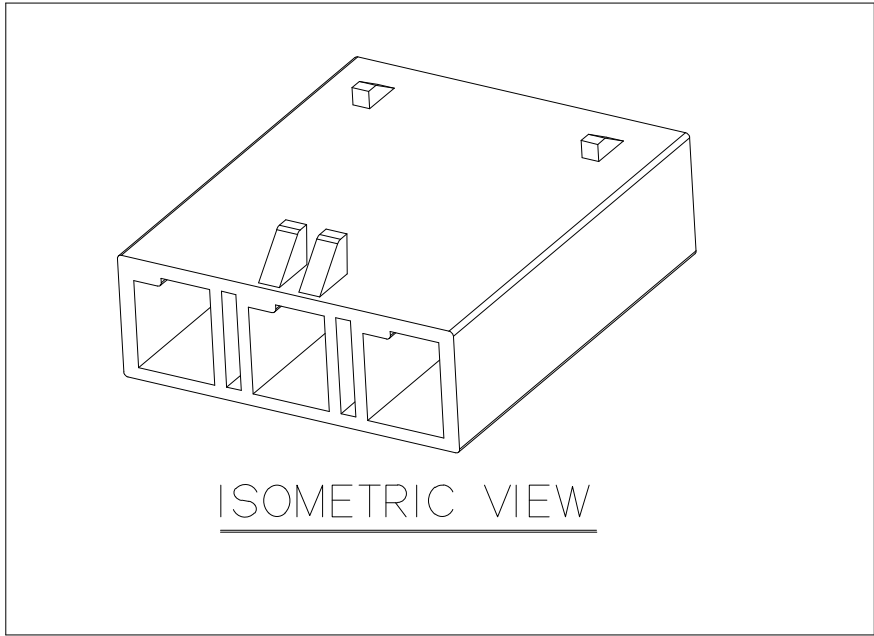

주 기

- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2. 적용 터미널 : ST740829-3,830-3,831-3
적용 HOUSING : MG613698
- 3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.


NO.	MATERIAL	COLOR
0	PBT (V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL		PBT (V0)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE			CLASS	MULTI
					INSULATION			TYPE	
△	설계사양변경(S110128)근거 도면 재작성	KSJ		'11.04.27	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG623789	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				
DR. KSH. 2006.10.09		CHK.							
CHK.		APP.			PART NAME .070 MULTI 3M(A) HOUSING				