
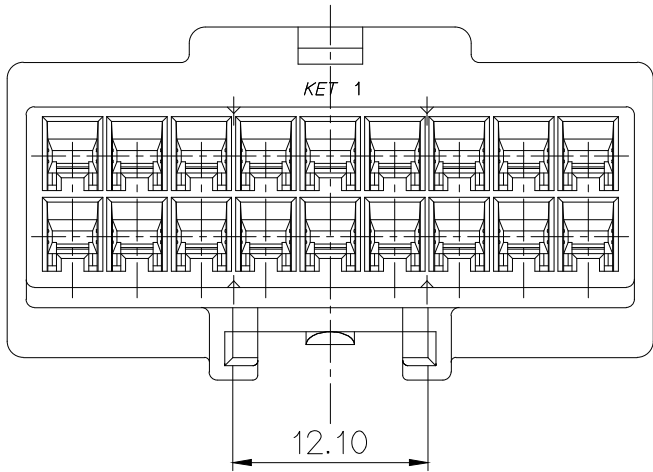
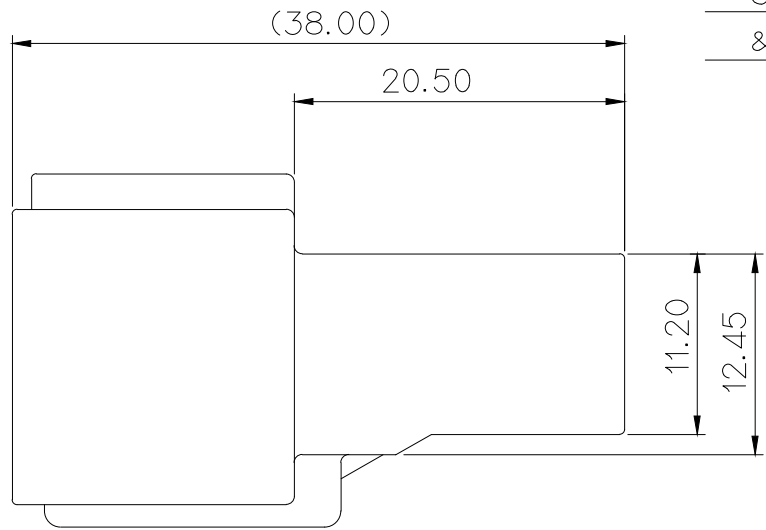
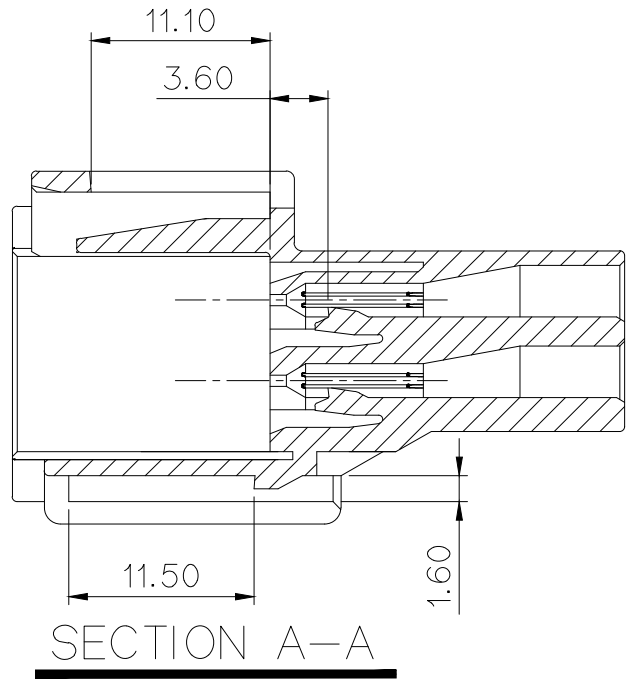


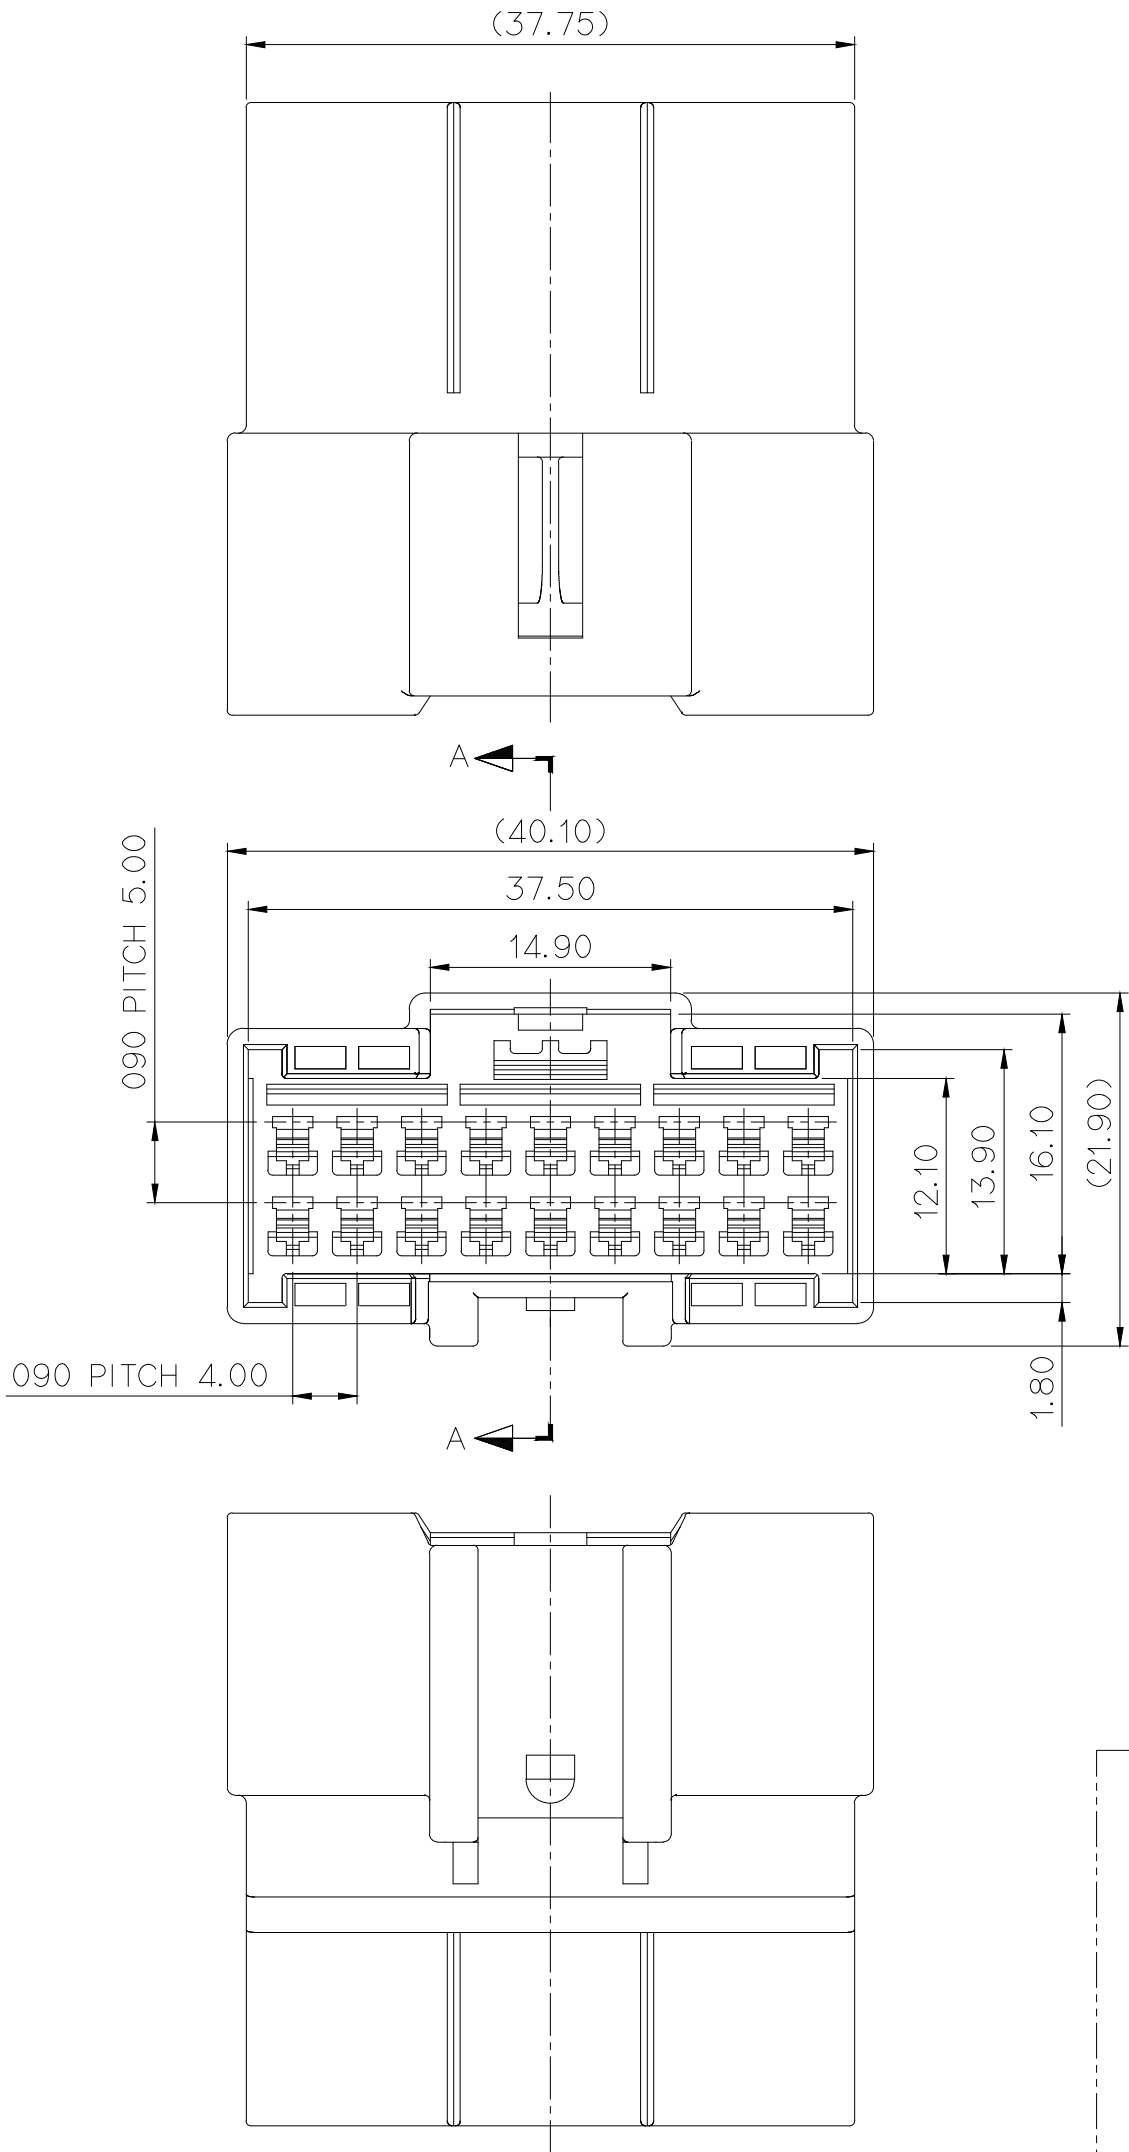


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST741101,0672, 0673, 0674-3
APPLICABLE CONNECTOR : MG613936
3. APPLICABLE CLIP : MG631267, 631268, 631471, 631929, 632019, 632970
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 TERMINAL : ST741101, 0672, 0673, 0674-3
적용 CONNECTOR : MG613936
3. 적용 CLIP : MG631267, 631268, 631471, 631929, 632019, 632970
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

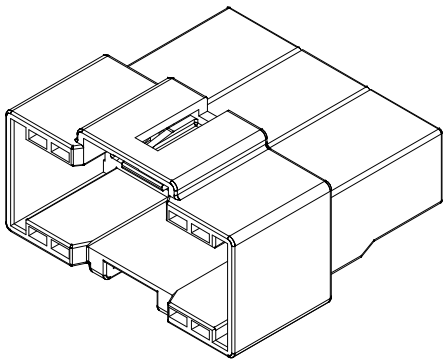

ISO VIEW

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

					MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH		NATURAL				
					WIRE RANGE		CLASS		090		
					INSULATION		TYPE		090 DTC		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG623937
DR.		SHIN.S.H '08.11.27	CHK.			PART NAME					
CHK.			APP.			090 DTC 18M HOUSING					