


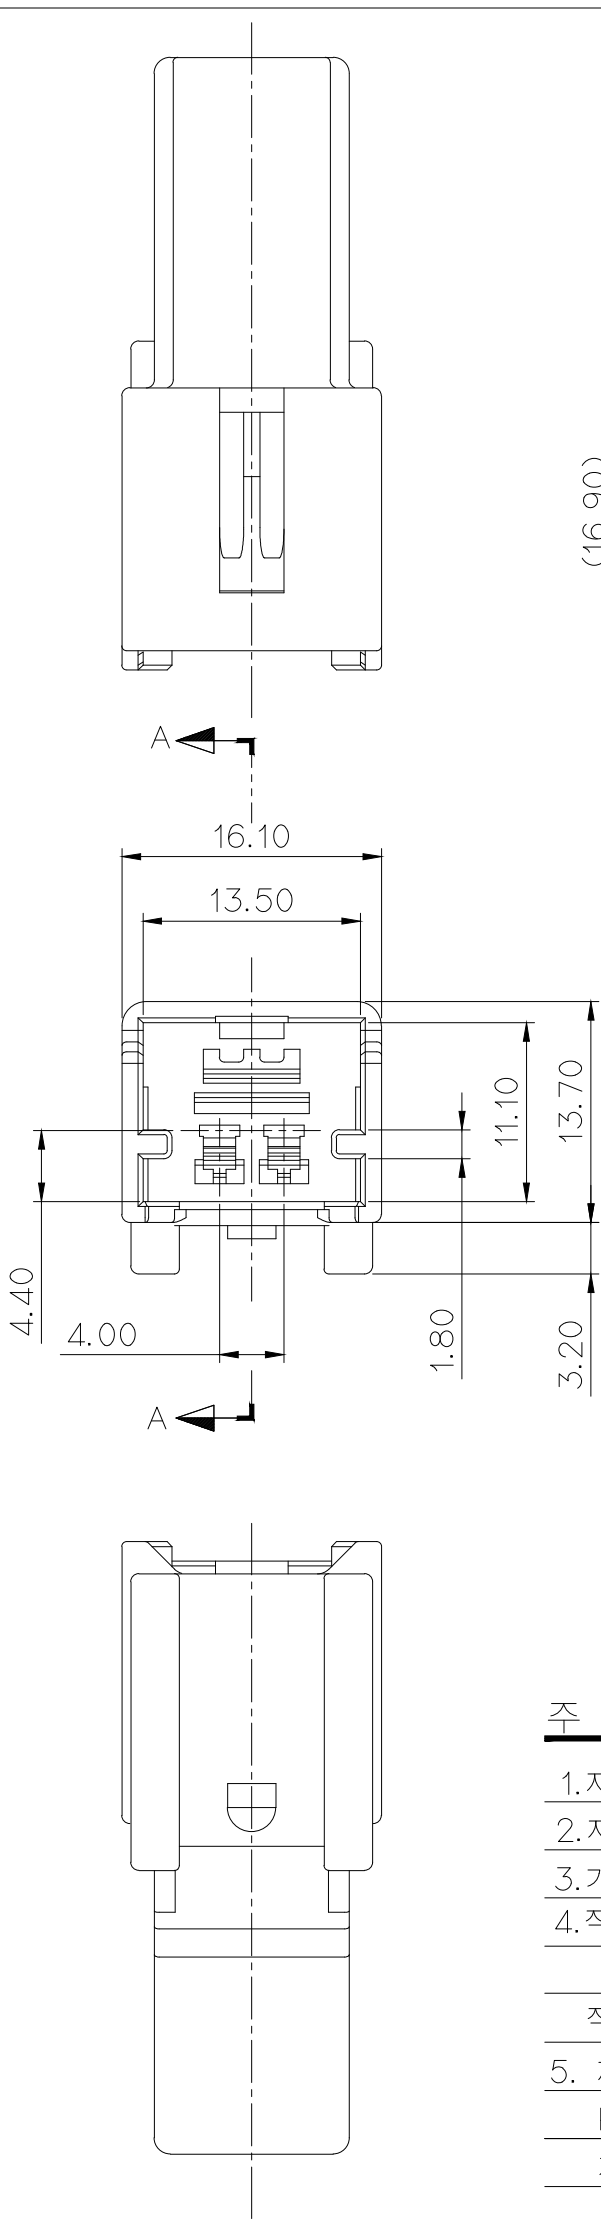



주 기

- 지시하지 않은 반경 R은 0.3로 한다
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST740672, 0673, 0674, 1101
ST741154, 1155, 1156, 1157
- 적용 CONNECTOR : MG614323
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS
TO BE 0.3 CHAMFER.
- MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST740672, 0673, 0674, 1101
ST741154, 1155, 1156, 1157
- APPLICABLE CONNECTOR : MG614323
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY,CADMIUM, HEXAVALENT CHROMIUM, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.

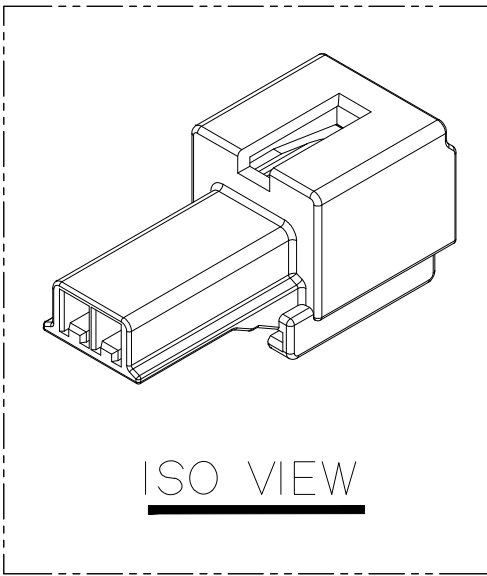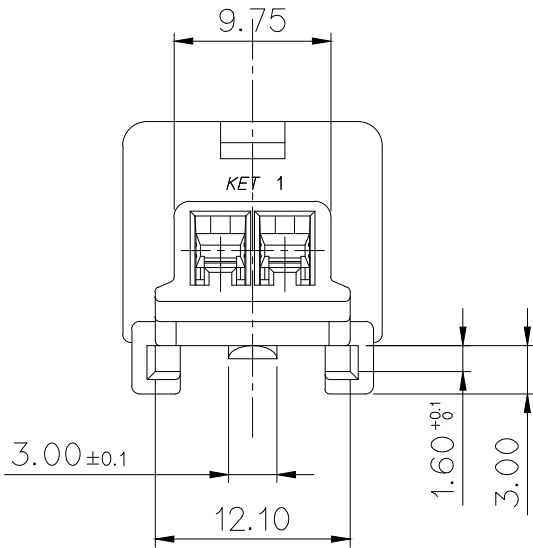

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

						MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		NATURAL			
						WIRE RANGE		CLASS		090	
						INSULATION		TYPE		090 DTC	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG624324
DR. CDH '10.05.27			CHK.			PART NAME					090 DTC 2M HOUSING
CHK.			APP.								