
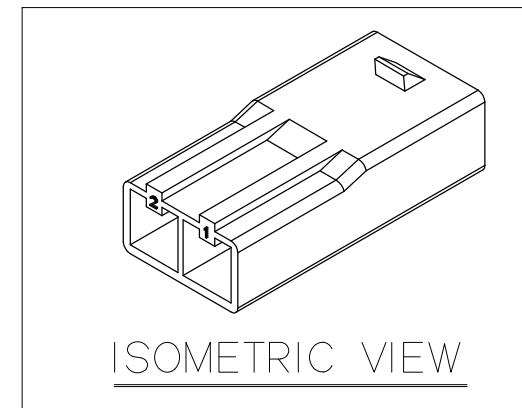
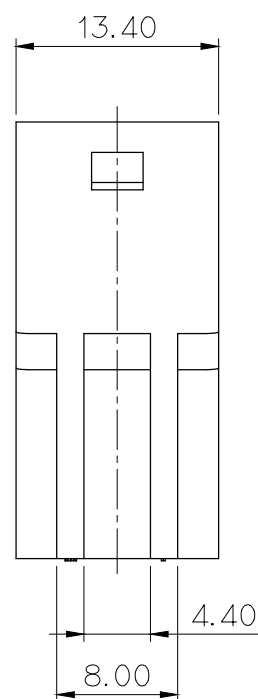


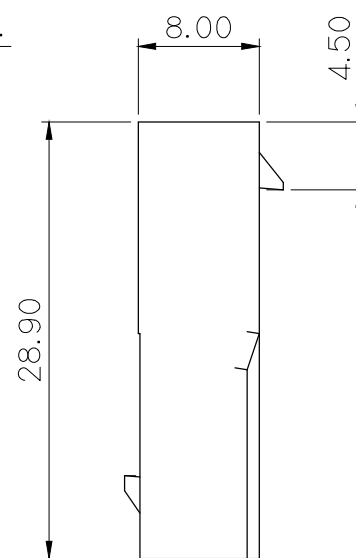

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE HOUSING : MG615304*
TERMINAL : 35745-0*10 (MOLEX PRODUCT)
REAR HOLDER : MG635317

3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 하우징 : MG615304*
터미널 : 35745-0*10 (MOLEX PRODUCT)
리홀더 : MG635317

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△	NO.	PART NO.	MATERIAL
	1	MG625306	PBT (VO)
	2	MG625306T	PET/PC (G.W.I.T)

					MATERIAL	△ SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	NATURAL	
					WIRE RANGE	CLASS NEW 070 MULTI	
					INSULATION	TYPE	
△	ECO-1107-325 근거 도면 수정	PJM	KSH	11.07.20			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR. P.J.M '10.12.13		CHK. KSH		12/27		±0.4	SCALE 2/1
CHK.		APP.		12/27		PART NAME NEW 070 MULTI 2M HSG	

USED ON