


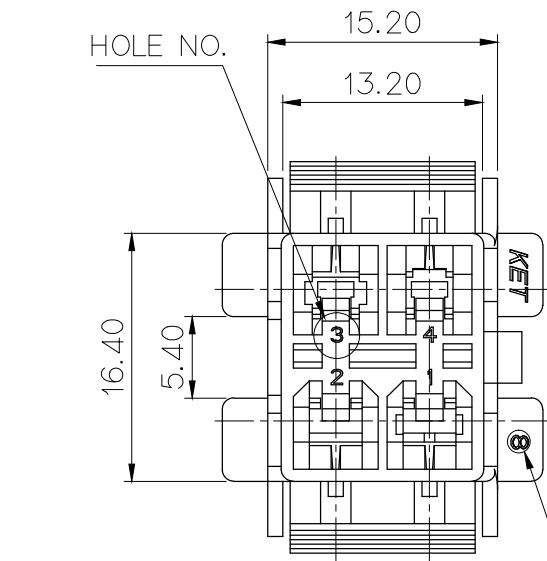


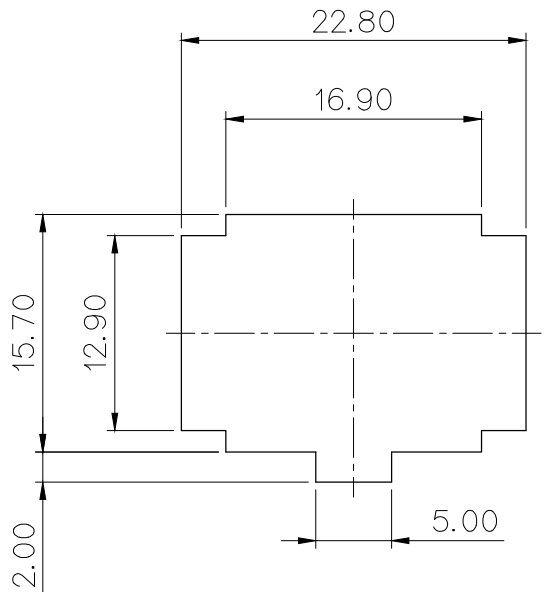

CAVITY NO.

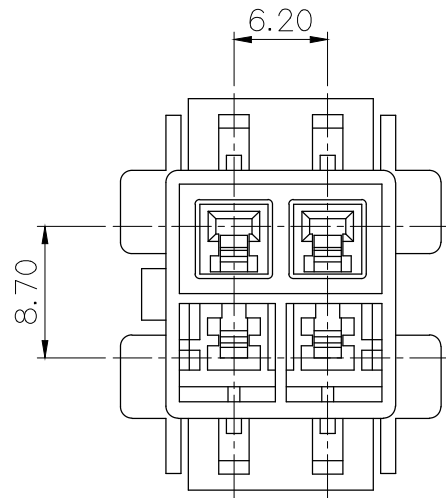

PANEL HOLE DIMENSION

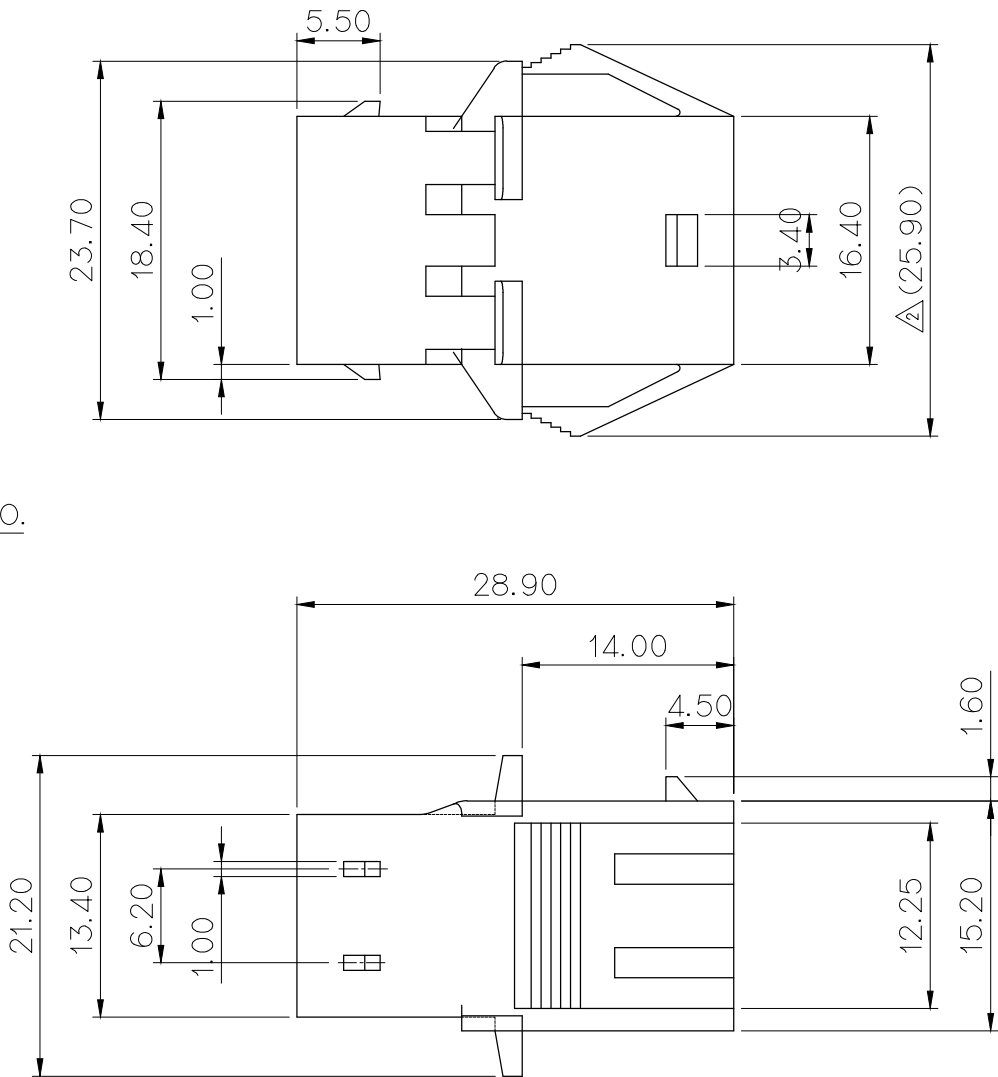

△ GENERAL TOLERANCE (HOUSING)

USED ON

10MAX 50MAX 100MAX 100VR ()

±0.25 ±0.35 ±0.55 ±0.95 ±1.0

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615310*
- △ APPLICABLE TERMINAL : ST741435(1HOLE)/ST731433(3HOLE)
ST741436(2HOLE)/ST731434(4HOLE)
APPLICABLE REAR HOLDER : MG635317
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

△


NO.	COLOR	MG625311	MG625311T
0	NATURAL	*	*
1	RED		
2	BLUE		*
3	YELLOW		
5	BLACK		

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG615310*
- △ 적용 터미널 : ST741435(1HOLE)/ST731433(3HOLE)
ST741436(2HOLE)/ST731434(4HOLE)
적용 리홀더 : MG635317
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△

NO.	PART NO.	MATERIAL
1	MG625311	PBT (VO)
2	MG625311T	PET+PC (G.W.I.T)



ISSUE MARK

						MATERIAL	△SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	△SEE TABLE	
△3	ECO-1809-146 근거 도면 수정	PSH KSH	BUC	'18.09.12		WIRE RANGE		CLASS NEW 070 MULTI
△2	ECO-1610-081근거 도면 재작성	SMG KSH	재	'16.10.07		INSULATION		TYPE
△1	ECO-1107-325에 의한 도면 수정	LCM KSH	재	'11.07.20		TOLERANCE EXCEPT AS NOTED	△2 SEE TABLE	PART NO. MG625311 / △1 MG625311T
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 2/1		
DR.		CHK.				PART NAME		
CHK.		APP. 재				NEW 070 4M HOUSING(WING)		