

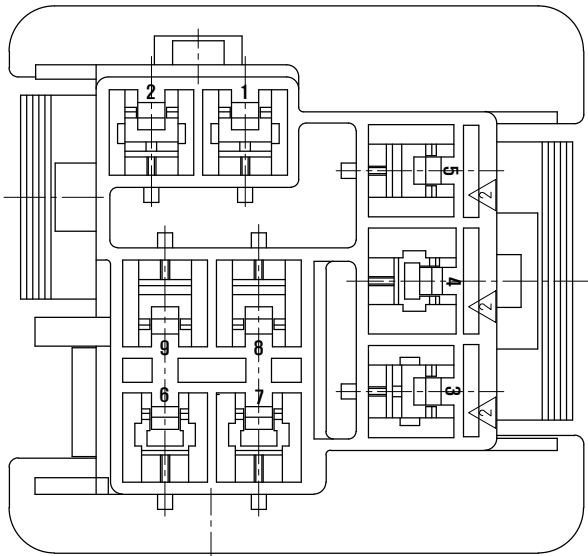
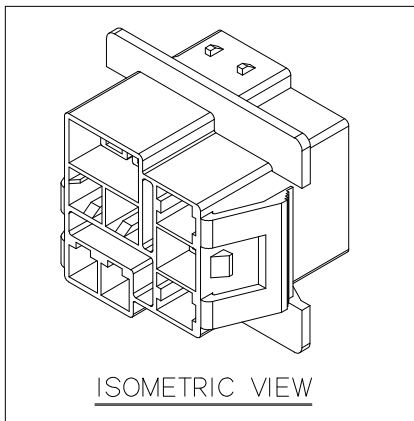
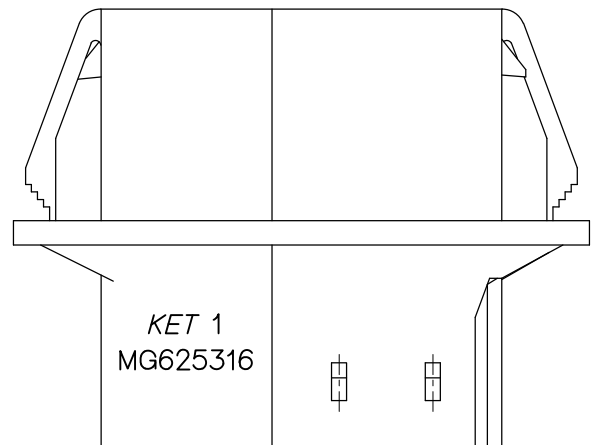
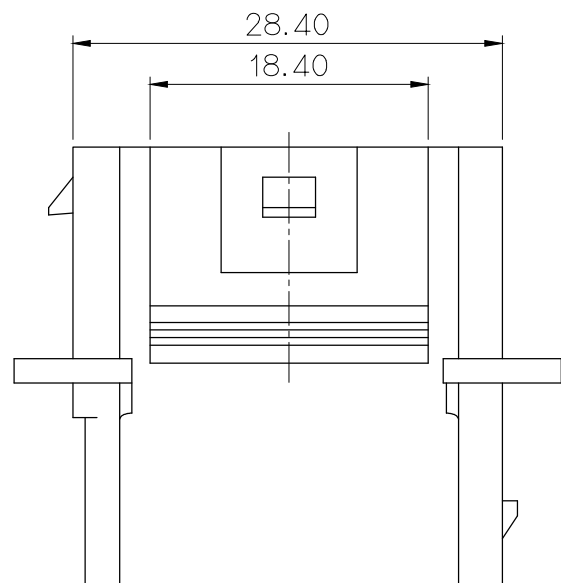
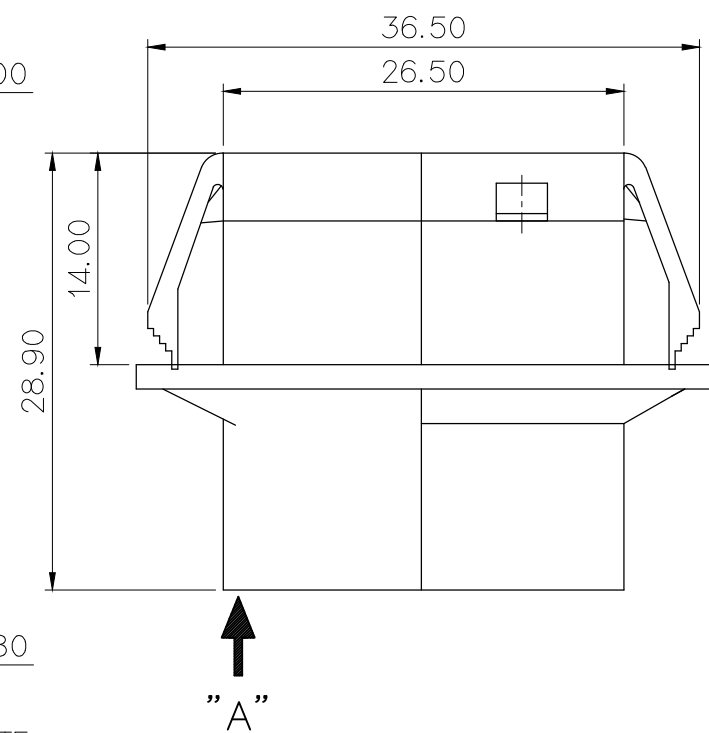
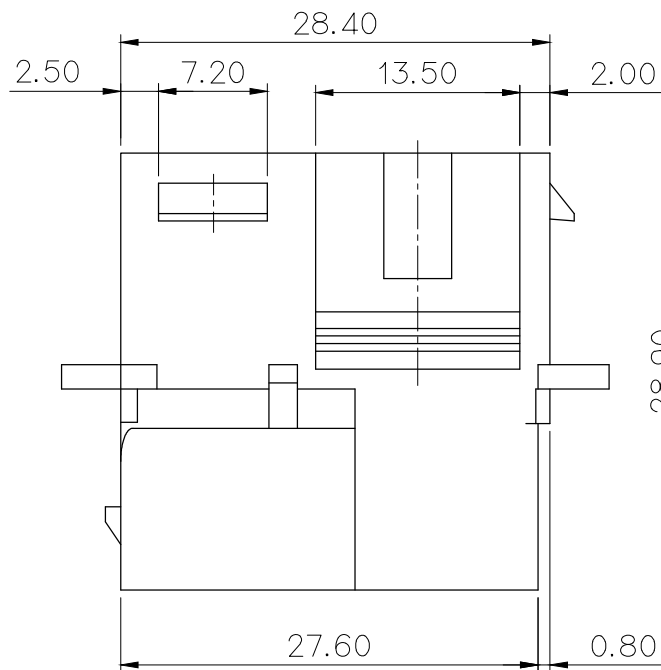


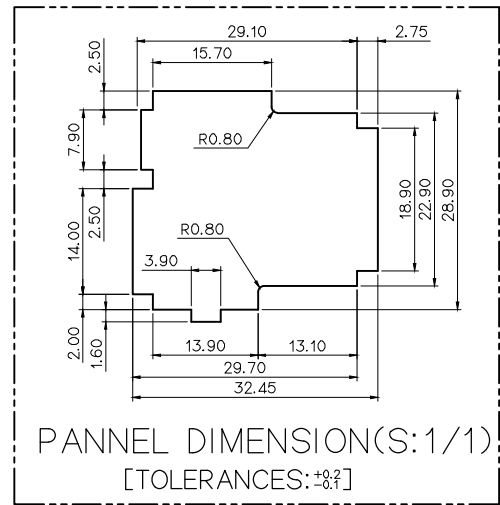

VIEW "A"

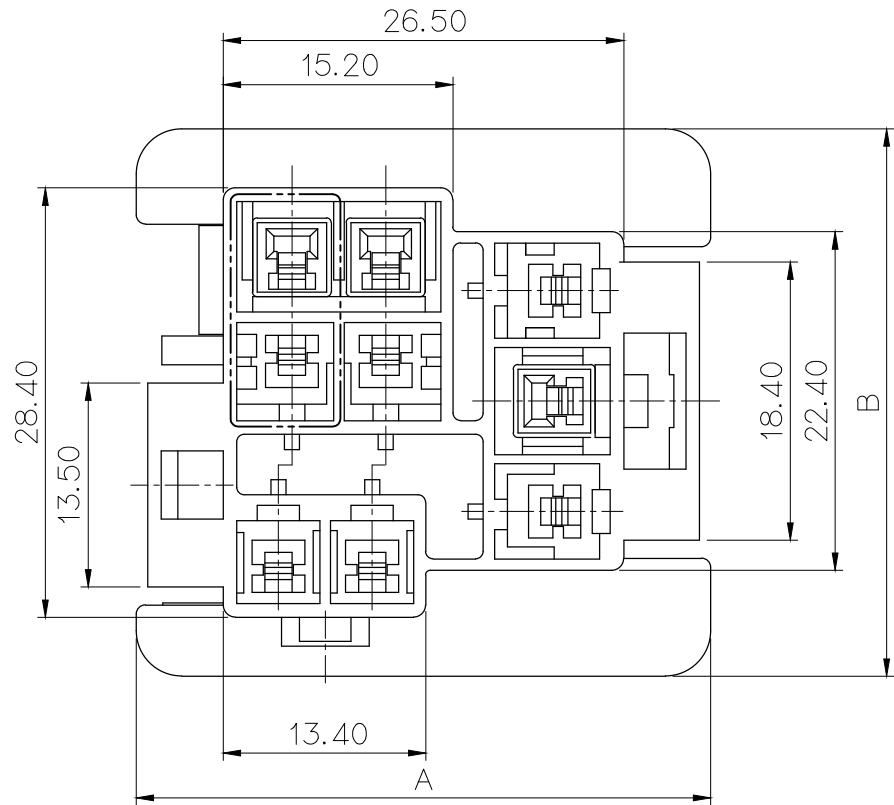

ISOMETRIC VIEW

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615304*,615307*,615310*
APPLICABLE R/HOLDER : MG635317,635318
△APPLICABLE TERMINAL : ST741435 [1,2,3 CIRCUIT]
ST731433 [4,6,7 CIRCUIT]
ST741436 [5,8,9 CIRCUIT]
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

- 주 기
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 적용 HOUSING : MG615304*,615307*,615310*
적용 R/HOLDER : MG635317,635318
△적용 TERMINAL : ST741435 [1,2,3 CIRCUIT]
ST731433 [4,6,7 CIRCUIT]
ST741436 [5,8,9 CIRCUIT]
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	PART NO.	MATERIAL
1	MG625316	PBT (VO)
2	MG625316T	PET/PC (G.W.I.T)

NO.	PART NO.	MATERIAL	A	B
①	MG625316	PBT	38.0	36.2
②	MG625316T	PET/PC	△37.6	35.7

NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
3	YELLOW
5	BLACK
6	GREEN

ISSUE MARK

						MATERIAL  SEE TABLE		 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
 4	ECO-1809-146 근거 도면 수정	 PSH	 KSH	BUC	'18.09.12	FINISH  3SEE TABLE		
 3	ECO-1702-218 근거 도면 제작성	 LYS	 KSH	BUC	'17.02.14	WIRE RANGE		CLASS NEW 070 MULTI
 2	ECO-1408-145 근거 도면 제작성	 LCM	 KSH	BUC	'14.08.26	INSULATION		TYPE
 1	ECO-1107-325에 의한 도면 수정.	 KSH			'11.07.20	TOLERANCE EXCEPT AS NOTED ±0.4		PART NO.  MG625316 / MG625316T
LTR REVISION RECORD		 DR.	 CHK.	APP.	DATE	SCALE 2/1	PART NAME	
DR. KSH. '10. 12. 28		CHK.				NEW 070 MULTI 9M HOUSING		
CHK.		APP. 		'10.12.28				