
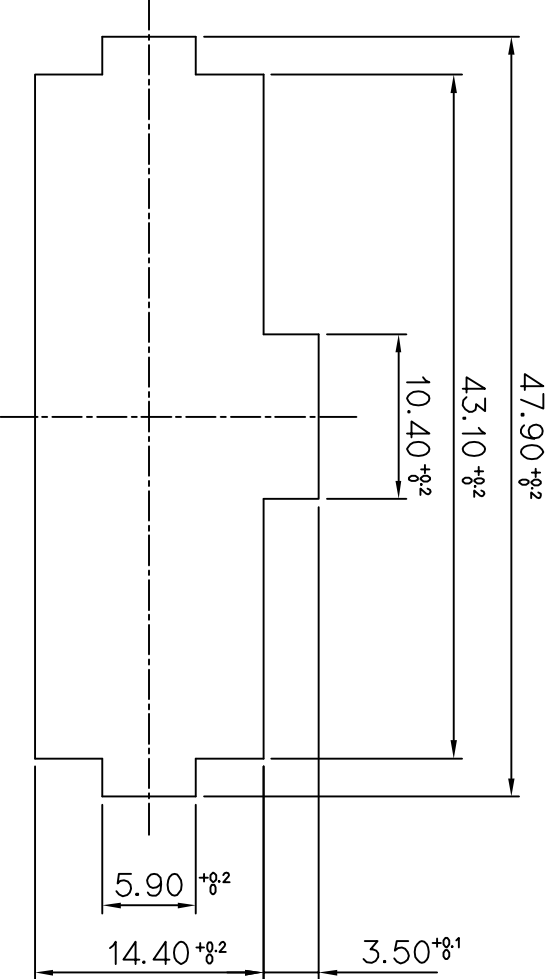


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1




- 주 기**
- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
 - 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
 - 3.적용 R/HOLDER : MG635620
 - 4.적용 TERMINAL: ST741175,1176

CUSTOMER DRAWING

PART NO. MG625431

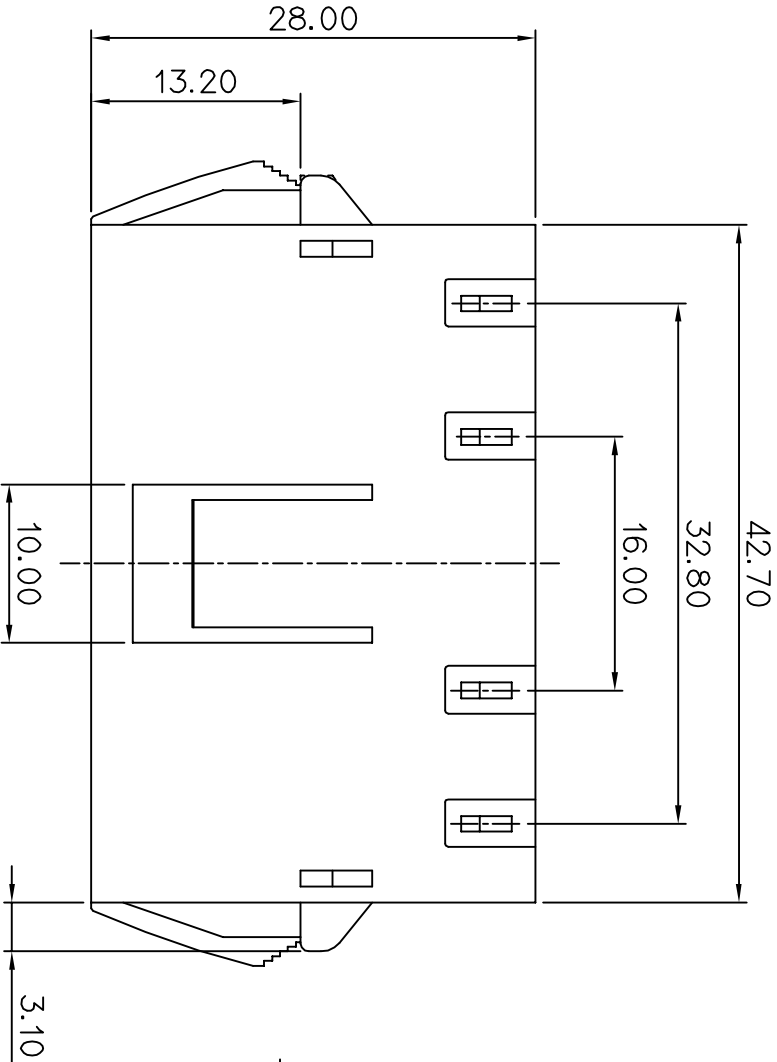

[PANEL THICK.=0.8-2.0]
PANEL HOME DIM'

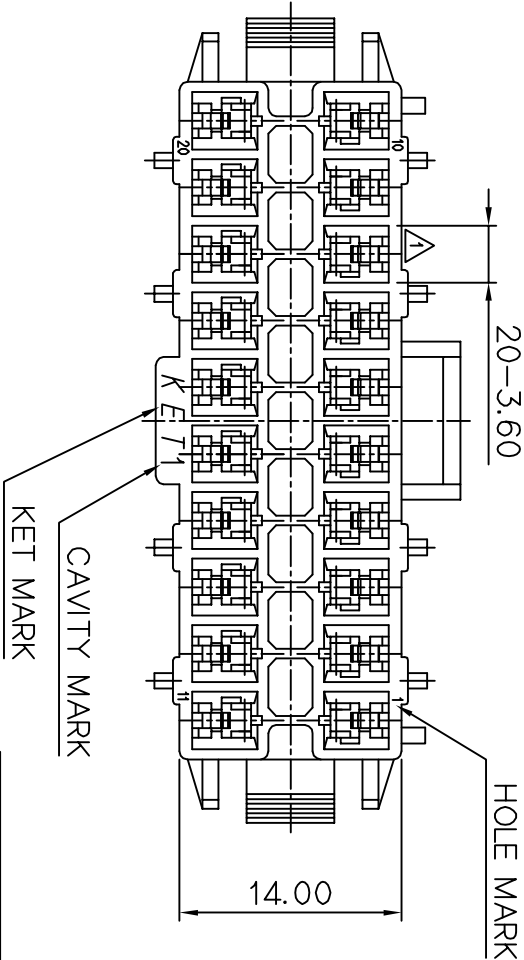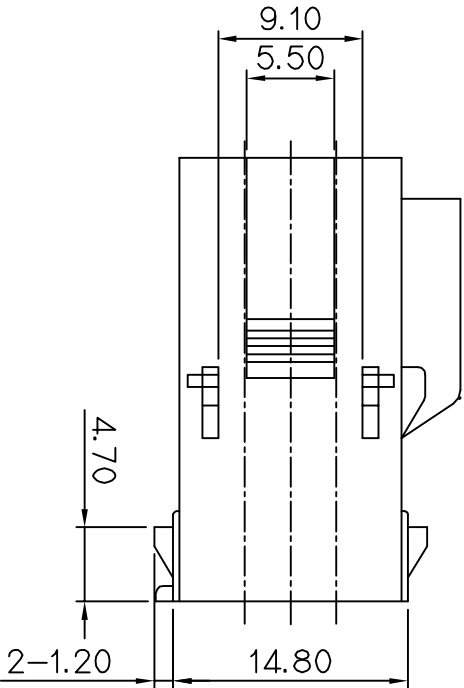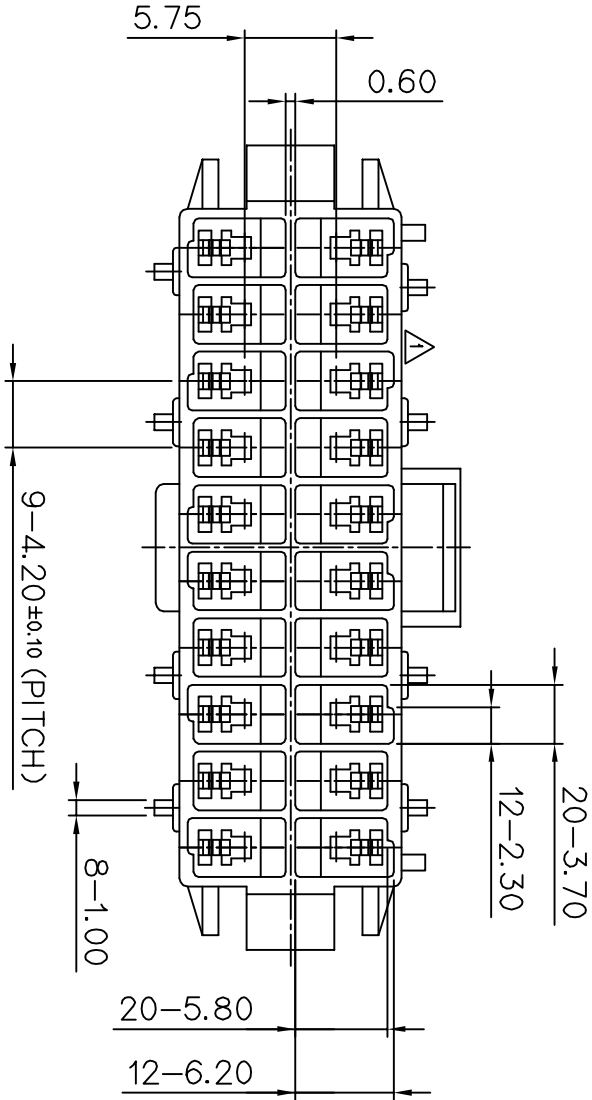

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION. PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
3. APPLICABLE R/HOLDER : MG635620
4. APPLICABLE TERMINAL : ST741175,1176

						MATERIAL	PET+PC(GWIT)	KIEIT KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE	CLASS	
						INSULATION	TYPE	
△	ECO-1406-049 근거 도면 수정	PSH	KSH	BUC	14.06.09			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR.	PSH, 12.10.15	CHK.						
CHK.	KSH.	APP.	BUC.					
PART NAME						NEW 050 20M HOUSING WING		

(DIMENSIONS IN MM)

ISSUE MARK

NEW 050 20M HOUSING WING