
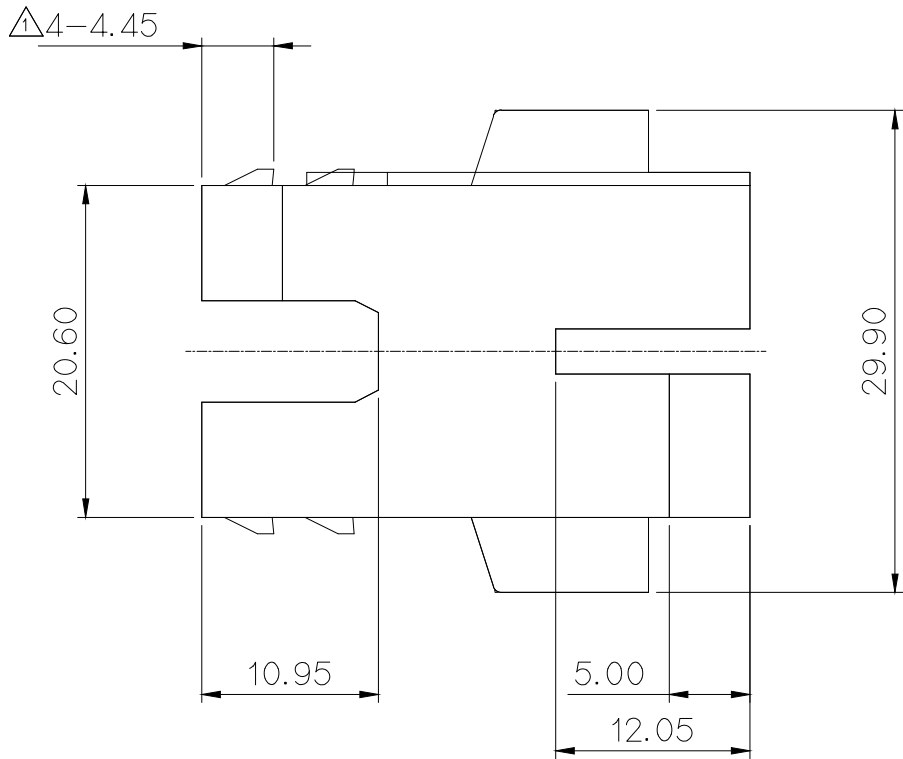
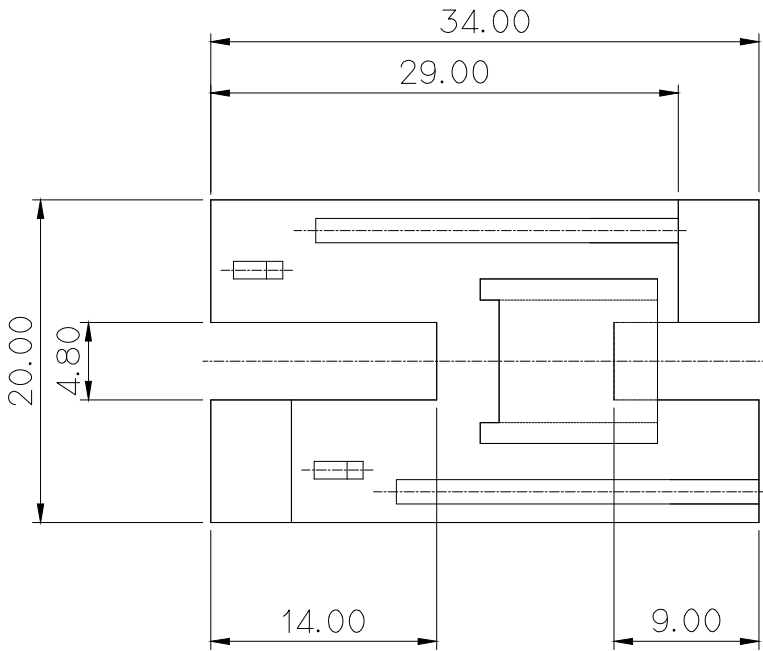
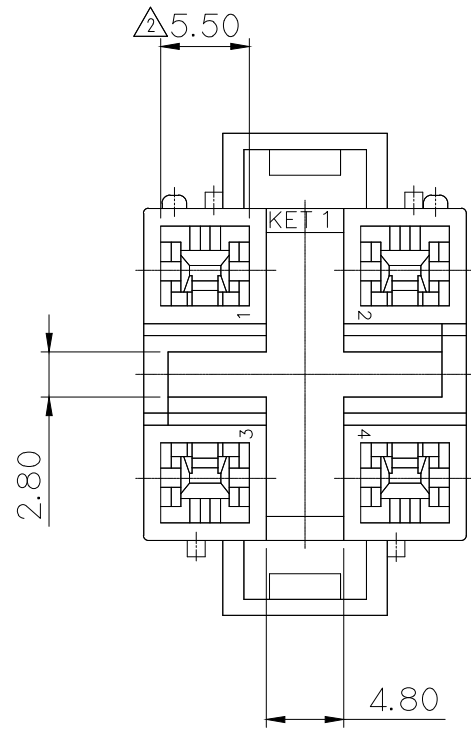


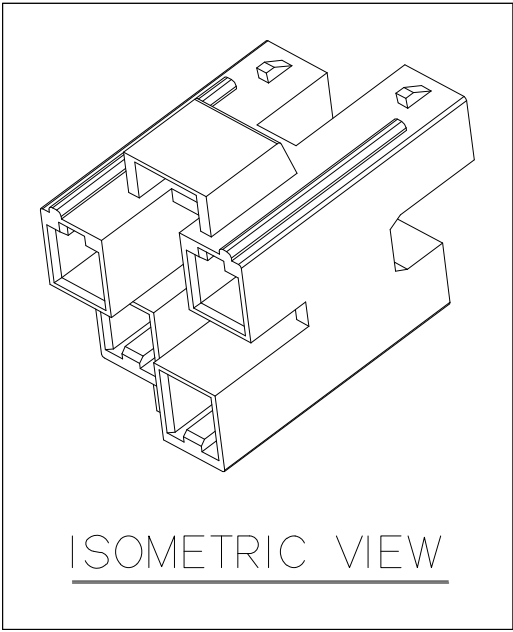


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST740690,691,692,693,871-3
적용 HOUSING : MG615564
- ⚠적용 R/HOLDER : MG635703
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740690,691,692,693,871-3
APPLICABLE HOUSING : MG615564
- ⚠ APPLICABLE R/HOLDER : MG635703
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

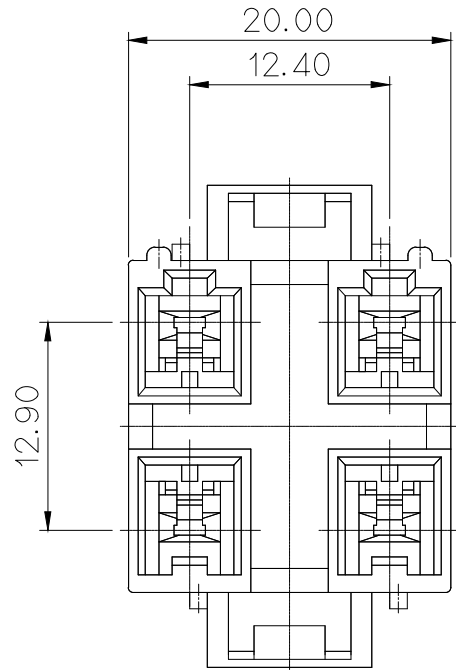

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL	PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	NATURAL		
					WIRE RANGE			CLASS 1806 D/L
					INSULATION			TYPE
	ECO-1405-070 근거 도면 수정	SMG	KSH		'14.05.17			
	ECO-1403-217 근거 도면 수정	SMG	KSH		'14.03.28			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG625434
DR. KSH '2012.12.28		CHK.				PART NAME		
CHK.		APP.			'12.12.28	1806 D/L 4M HS'G(T.P.)		