

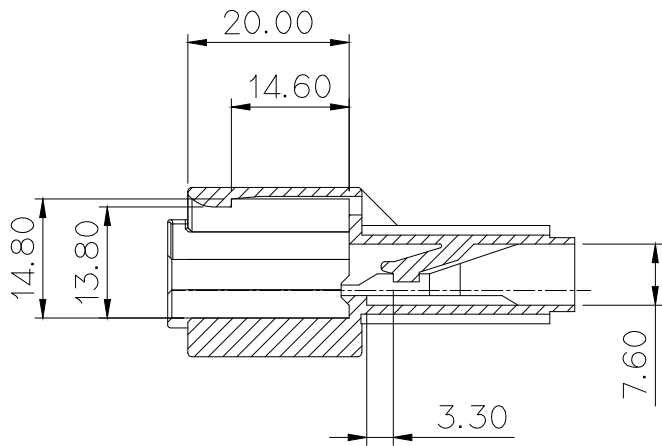
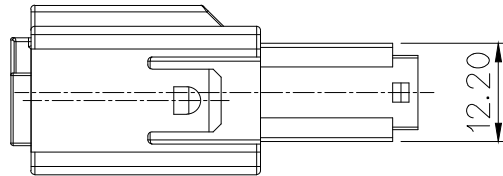
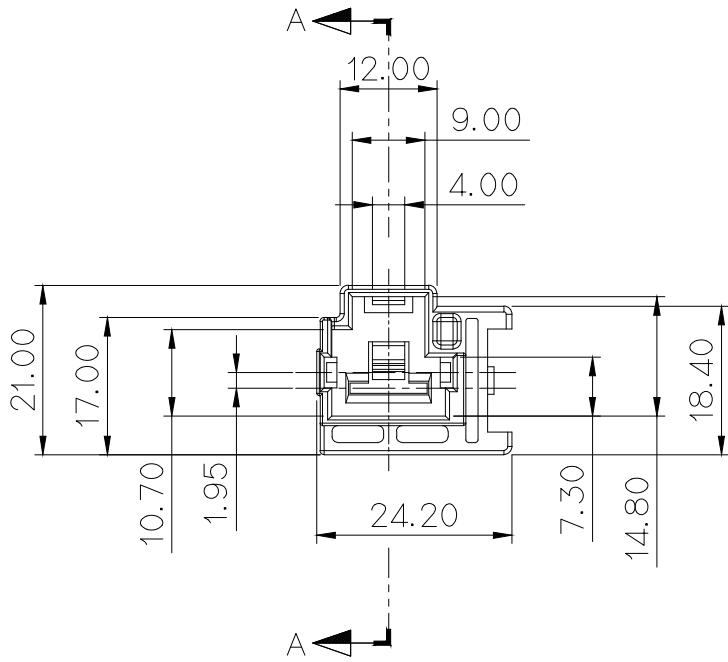
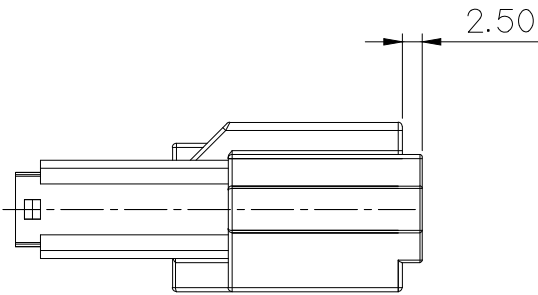


ISO VIEW

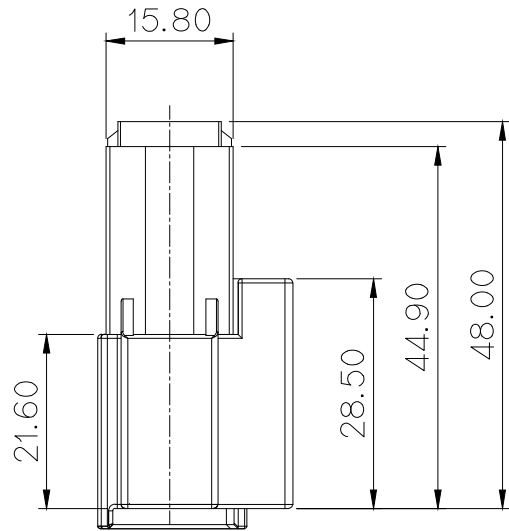

SECTION A-A



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(375) : ST740538,740539-3
적용 CONNECTOR : MG610658
적용 REAR HOLDER : MG630661
적용 CLIP : MG630778, MG633294
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740538, ST740539-3
APPLICABLE FEMALE HOUSING : MG610658
APPLICABLE REAR HOLDER : MG630661
APPLICABLE CLIP: MG630778, MG633294
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

					MATERIAL		NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		BLACK		
					WIRE RANGE				CLASS
					INSULATION				TYPE 375
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG625438
DR.	YM.K	2013.01.18	CHK.	CSH			PART NAME		
CHK.			APP.	HSH			375 1M HOUSING		