

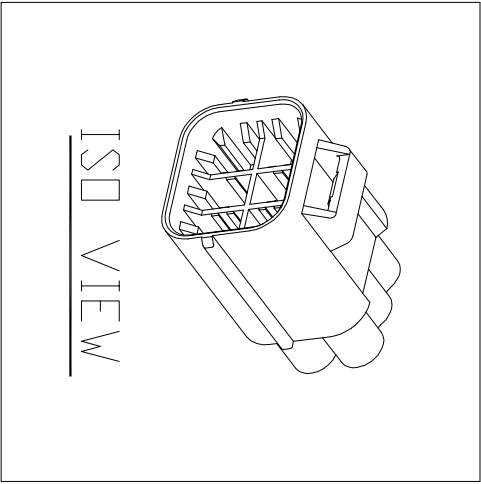
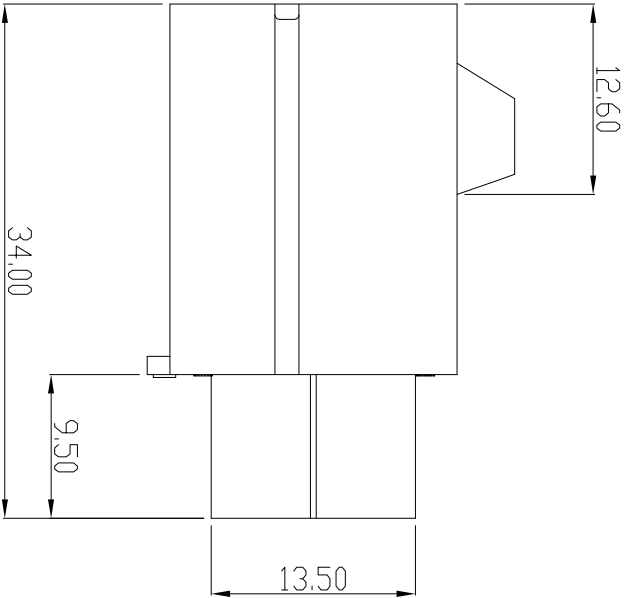


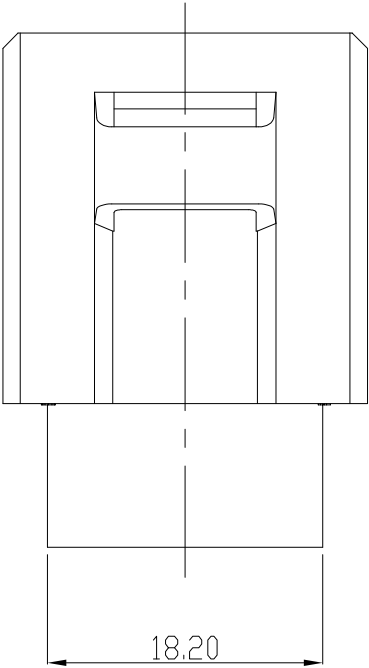


ISO VIEW

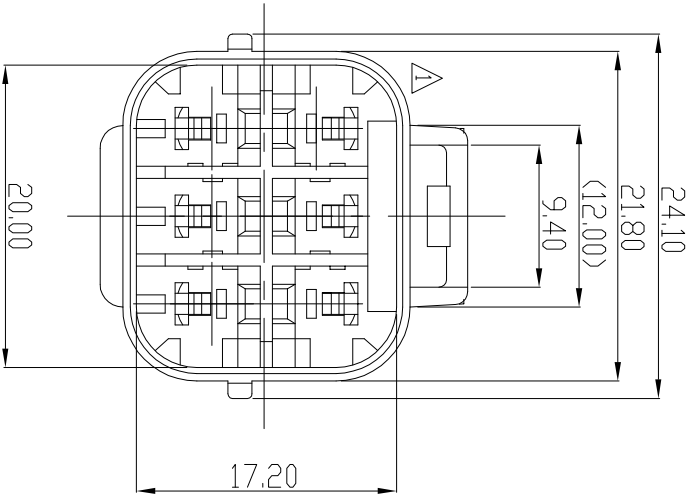

GENERAL TOLERANCE (HOUSING)							USED ON
	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	
						0.1	

- 주 기
- 지시하지 않은 반경 R은 0.2-0.3로 한다.
 - 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 - 적용 TERMINAL : ST741350,51,52-3
상대 HOUSING : MG615581
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBS,PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTES
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
 - MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST741350,51,52-3 MATING HOUSING : MG615581
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBS,PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION

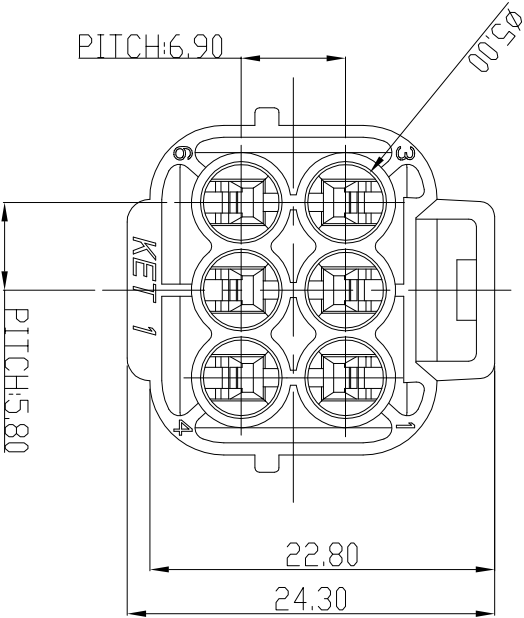

						MATERIAL	GWIT(PET+PC)	KT KOREA ELECTRIC TERMINAL CO., LTD. ENGINEERED		
						FINISH	NATURAL			
						WIRE RANGE	-			
						INSULATION	-			
						DATE	2013.12.17			
LTR	REVISION RECORD	DR	KSH	CHK	BUC	DATE	2013.12.17	TOLERANCE AS NOTED	SCALE	PART NO.
DR	KSH 2013.10.25	CHK		APP		DATE		SEE TABLE	2/1	MG625442
CHK		APP	BACK 2013.10.25	PART NAME	070(WP) 6M HOUSING					

ISSUE MARK